


# Stainless steel valves for corrosive environments & water base fluids

explosion-proof solenoid valves, with Atex, IECEx or C UL US certification and pressure relief valves

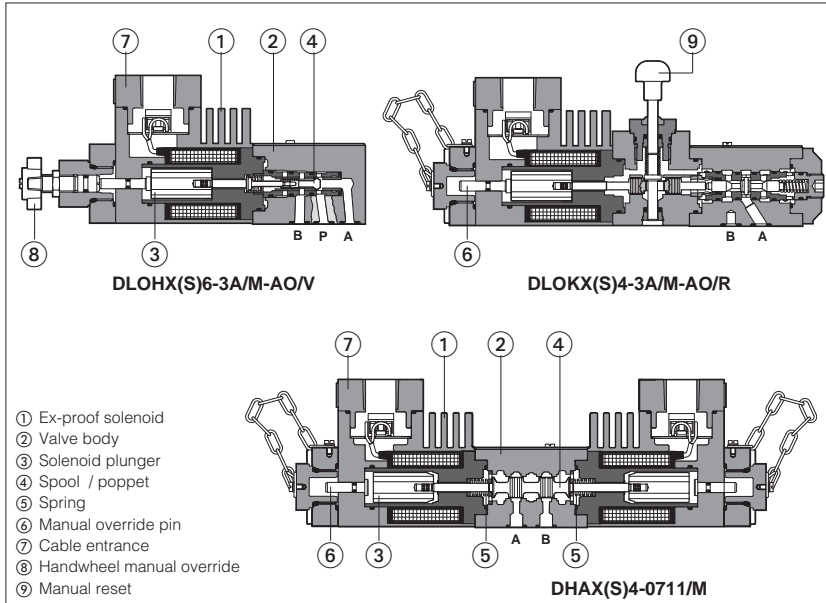

- ① Ex-proof solenoid
- ② Valve body
- ③ Solenoid plunger
- ④ Spool / poppet
- ⑤ Spring
- ⑥ Manual override pin
- ⑦ Cable entrance
- ⑧ Handwheel manual override
- ⑨ Manual reset

New line of directional solenoid valves and pressure relief valves in stainless steel execution for corrosive environments. Stainless steel solenoids ①, ex-proof Atex, IECEx or C UL US, for hazardous areas -see section ③.

Two executions are available:

- X** stainless steel for external and internal parts, to withstand extreme and corrosive environmental conditions, and to ensure full compatibility also with water base and special fluids.
- XS** stainless steel for external parts to withstand extreme and corrosive environmental conditions. Internal components are derived from standard valves.

Directional valves are available in two basic versions: poppet type, 3-way leak free (suitable for accumulator systems) or spool type, 4-way on-off valves.

Explosion proof solenoids ① with:

- ATEX** 94/9/CE certification, protection mode Ex II 2GD, Ex d IIC T6/T4/T3, Ex tD A21 IP67
- IECEx** worldwide recognized safety certification, Ex d IIC T6/T4/T3, Ex tD A21 IP67
- C UL US** certification, according to UL 1002 and CSA 22.2 n°139-1982 class I Group C & D (Group IIA & IIB to NEC 505-7)

DHAX and DLOHX valves conform to **SIL 3** safety level (T V approved).

## 1 STAINLESS STEEL VALVES: MAIN DATA

Valve execution (1)		Description	ISO size	Voltages		ATEX, IECEx		C UL US		Max flow l/min	Δp (at max flow) bar	Max pressure bar (3)	
X	XS			DC	AC 50/60Hz	T class (1)	Input Power	T class (1)	Input Power				
DHAX4	DHAXS6 DHAXS4	4 way, spool type direct solenoid valves	06 (ISO 4401)	12	12	T6 T4	T4 T3	8 W 25 W	(2) T4	12 W 33 W	60 70	350	
DLOHX6-AO DLOHX4-AO	DLOHXS6-AO DLOHXS4-AO	3 way, poppet type, direct solenoid valves	06 (ISO 4401)	24	24	T6 T4	T4 T3	8 W 25 W	(2) T4	12 W 33 W	10 12	315 350	
DLOKX4-AO	DLOKXS6-AO DLOKXS4-AO	3 way, poppet type, direct solenoid valves	06 (ISO 4401)	48	110	T6 T4	T4 T3	8 W 25 W	(2) T4	12 W 33 W	25 30	see diagram at section ⑧	
DLOPX6-AO	DLOPXS6-AO	3 way, poppet type, piloted solenoid valve	no	220	230	T6	T4	8 W	(2)	12 W	220	315	
DLPX	DLPXS	3 way, poppet type, hydraulic operated valve	no	-	-	-	-	-	-	-	220	315	
CART-MX-3 CART-MX-6 CART AREX-20	CART-MXS-3 CART-MXS-6 CART AREXS-20	relief valve direct screw-in	no no no	-	-	-	-	-	-	-	2,5 40 (60 PED) 120 (150 PED)	30	420 500 400
HMPX*	HMPXS*	relief valve direct modular	06 (ISO 4401)	-	-	-	-	-	-	-	40	35	350
SC LIX-2531* LIMMX-2*	LIMMXS-2*	relief valve DIN cartridge (4)	25 (ISO 7368)	-	-	-	-	-	-	-	400	6	350

### Notes:

- (1) XS6 and XS4 versions differ only for the coil power (see Input Power) - For ATEX, IECEx certification the certified temperature class T6, T4, T3 is related to the max ambient temperature, from which results the max solenoid surface temperature allowed in the application (see section ③). The reference ambient temperature is -40÷+40°C (+45°C for X\*6), for higher ambient temperature (-40÷+70 °C) the temperature class has to be degraded (option /7). For C UL US certification the temperature class is related to the coil power 12W or 33 W
- (2) For C UL US certification the temperature class corresponding to the coil power 12W is not reported in the nameplate marking. For coil power 33W the temperature class is T4.
- (3) Max pressure on T port = 110 bar
- (4) Optional electrohydraulic venting available on request.

Valves are provided by HNBR seals, which allow min ambient temperature down to -40 °C (max oil viscosity = 380 cSt). The min ambient temperature for valves with /PE option (FPM seals) is -20°C. Max ambient temperature for valves without solenoids is 70°C.

## 2 MATERIALS SPECIFICATION

Valve type	solenoid housing ①	valve body ②	internal parts for X execution ③ + ④	internal parts for XS execution ③ + ④	spring ⑤	seals	
						std	/PE
DHAX(S)	AISI 630	AISI 316L	AISI 316L, 420B, 440C, 430F	Carbon steel	AISI 302	HNBR (buna)	FPM (viton)
DLOHX(S) DLOKX(S)	AISI 630	AISI 316L	AISI 316L, 420B, 440C, 430F	Carbon steel	AISI 302	HNBR (buna)	FPM (viton)
DLOPX(S)	AISI 630	AISI 630	AISI 316L, 420B, 440C, 430F	Carbon steel	AISI 302	HNBR (buna)	FPM (viton)
DLPX(S)	-	AISI 630	AISI 420B	Carbon steel	AISI 302	HNBR (buna)	FPM (viton)
CART-X(S)	-	AISI 316L	AISI 316L, 420B, 630	Carbon steel	AISI 302	HNBR (buna)	FPM (viton)
HMPX(S)	-	AISI 316L	AISI 316L, 420B, 630	Carbon steel	AISI 302	HNBR (buna)	FPM (viton)
LIMMX(S)	-	AISI 316L	AISI 316L, 420B, 630	Carbon steel	AISI 302	HNBR (buna)	FPM (viton)
SC LIX	-	AISI 316L	AISI 630, AISI 420B	-	AISI 302	HNBR (buna)	FPM (viton)

**3 EXPLOSION PROOF SOLENOIDS: MAIN DATA**

<b>VALVE TYPE</b>		DHAXS6 DLOHX(S)6 DLOXS6 DLOPX(S)6	DHAX(S)4 DLOHX(S)4 DLOKX(S)4
Solenoid code	<b>ATEX</b>	OAX/WP	OAKX/WP
	<b>IECEX</b>	OAX/WP	OAKX/WP
	<b>C UL US</b>	OAXUL/WP	OAKXUL/WP
Voltage code	Vdc	<b>12DC, 24DC, 48DC (1), 110DC, 220DC</b>	
	VAC 50/60 Hz	<b>12AC, 24AC, 110AC, 230AC</b>	
Power consumption	<b>ATEX, IECEX</b>	8W	25W
	<b>C UL US</b>	12W	33W
Coil insulation	Class H		
Protection degree	IP 67 According to IEC 144 when correctly coupled with the relevant cable gland SP-PAX19*, see section 17		
Duty factor	100%		
Mechanical construction	Flame proof housing classified Ex d, according to EN 60079-0: 2006, EN 6079-1: 2007		
Cable entrance and electrical wiring	Internal terminal board for cable connection threaded connection M20x1,5 for cable entrance, vertical (standard) or Horizontal (option /O) See section 17 for cable gland		
Method of protection	Ex d		
Temperature class (surface temperature)	<b>ATEX, IECEX</b>	T6 (≤ 85°C)	T4 (≤ 135°C) option /7
	<b>C UL US</b>	Not applicable	
Ambient temperature	<b>ATEX, IECEX</b>	-40 ÷ +45 °C	-40 ÷ +70 °C
	<b>C UL US</b>	-40 ÷ +70 °C	

**Notes:** (1) 48DC only for ATEX, IECEX  
For alternating current supply a rectifier bridge is integrated in the solenoid

**3.1 CERTIFICATIONS**

In the following are resumed the valves marking according to ATEX Group II, IECEX Group II and C UL US certifications.

**ATEX, Group II**

- = ATEX identification for explosive atmospheres equipments
- II** = Group II for surfaces plants
- 2** = High protection (equipment category)
- GD** = For gas, vapours and dust
- Ex d** = Flame proof housing
- IIC** = Gas group
- T6/T4/T3** = Temperature class of solenoid surface
- Gb** = Equipment protection level, high level protection for explosive Gas atmospheres
- Ex tb** = Equipment protection by enclosure "tb"
- IIIC** = Suitable for conductive dust (applicable also IIIB and/or IIIA)
- Db** = Equipment protection level, high level protection for explosive Dust atmospheres
- IP67** = Protection degree

**Zone 1 (gas) and 21 (dust)** = Possibility of explosive atmosphere during normal functioning  
**Zone 2 (gas) and 22 (dust)** = Low probability of explosive atmosphere

**IECEX, Group II**

- Ex d** = Equipment for explosive atmospheres, flame proof housing
- IIC** = Gas group
- T6/T4/T3** = Temperature class of solenoid surface
- Ex tb** = Dust ignition protection
- IIIC** = Suitable for conductive dust (applicable also IIIB and/or IIIA)
- Db** = Equipment protection level, high level protection for explosive Dust atmospheres
- IP67** = Protection degree

**C UL US certification**

- Class I** = Equipment for famable gas and vapours
- Division 1** = Possibility of explosive atmosphere during normal functioning
- Groups C&D** = Gas group (according to UL 1002)
- Groups IIA&IIB** = Gas group (according to NEC 505-7)
- T4** = Temperature class of solenoid surface referred to +70°C ambient temperature

**EXAMPLE OF NAMEPLATE MARKING**

Marking according to ATEX Directive

**EXAMPLE OF NAMEPLATE MARKING**

Marking according to IECEX Directive

**EXAMPLE OF NAMEPLATE MARKING**


Marking according to UL Directive

**4** **SPOOL TYPE DIRECTIONAL SOLENOID VALVES: MODEL CODE**

**DHA X 4 \* - 0 63 1/2 / PA - M / V 24DC \*\* /\***

<p>Spool type, direct</p> <p><b>X</b> = Stainless steel execution for all parts <b>XS</b> = Stainless steel execution for external parts</p> <p>Temperature class, see section 11 <b>4</b> = T4 <b>6</b> = T6 (only for XS execution)</p> <p>Certification type - (omit for ATEX) <b>/IE</b> = Group II IECEx <b>/UL</b> = C UL US with 1 m cables lenght, factory wired</p> <p>Size: 0 = 06</p> <p>Valve configuration, see section 4.1 61, 63, 71, 75 (configurations 63 and 75 are available only with spool type 1/2)</p> <p>Spool type, see section 4.2</p>	<p>Seals material: omit for NBR (mineral oil &amp; water glycol) <b>PE</b> = FPM</p> <p>Series number</p> <p>Voltage code - see section 13</p> <p>Options: <b>A</b> = solenoid at side of port B <b>V</b> = with handwheel manual override <b>7</b> = for ambient temperature up to 70°C (only for Atex and IECEx) <b>O</b> = horizontal cable entrance</p> <p>Solenoid threaded connection: <b>M</b> = M20x1,5 UNI-4535 (6H/6g) <b>NPT</b> = 1/2" NPT ANSI B2.1 (tapered) only for /UL</p> <p>Optional cable gland: <b>PA</b> = with threaded cable gland, see section 17</p>	
--	--	--

**4.1 Hydraulic configuration**

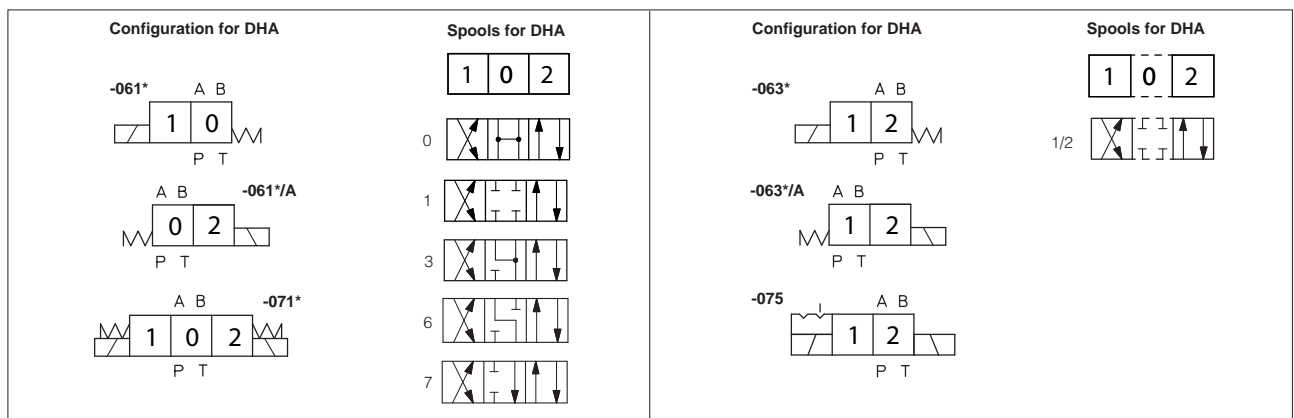


**5** **POPPET TYPE LEAK FREE DIRECTIONAL SOLENOID VALVES: MODEL CODE**

**DLOH X 6 - 3 A / PA - M - AO / V 24DC \*\* /\***

<p><b>DLOH - DLOK</b> = poppet type, direct <b>DLOP</b> = poppet type, electro-hydraulic piloted <b>DLP</b> = as DLOP but hydraulically piloted</p> <p><b>X</b> = Stainless steel execution for all parts <b>XS</b> = Stainless steel execution for external parts</p> <p>Temperature class (not for DLP*), see section 11 <b>4</b> = T4 (only for DLOH* and DLOK*) <b>6</b> = T6 (not for DLOKX)</p> <p><b>3</b> = three way</p> <p>Valve configuration, see section 5.1 <b>A</b> = A to T in rest position <b>C</b> = P to A in rest position</p>	<p>Seals material: omit for NBR (mineral oil &amp; water glycol) <b>PE</b> = FPM</p> <p>Series number</p> <p>Voltage code - see section 13</p> <p>Options: (not for DLPX) <b>R</b> = with solenoid manual reset <b>V</b> = with handwheel manual override <b>7</b> = for ambient temperature up to 70°C (only for Atex and IECEx) <b>O</b> = Horizontal cable entrance Only for DLOPXS <b>D</b> = internal drain <b>E</b> = external pilot pressure</p> <p>Certification type: <b>AO</b> = Group II, Atex <b>AO/IE</b> = Group II, IECEx <b>AO/UL</b> = C UL US with 1 m cables lenght, factory wired</p> <p>Solenoid threaded connection: <b>M</b> = M20x1,5 UNI-4535 (6H/6g) - <b>NPT</b> = 1/2" NPT ANSI B2.1 (tapered) only for /UL</p> <p>Optional cable gland: <b>PA</b> = with threaded cable gland, see section 17</p>	
---	--	--

**5.1 Hydraulic configuration**

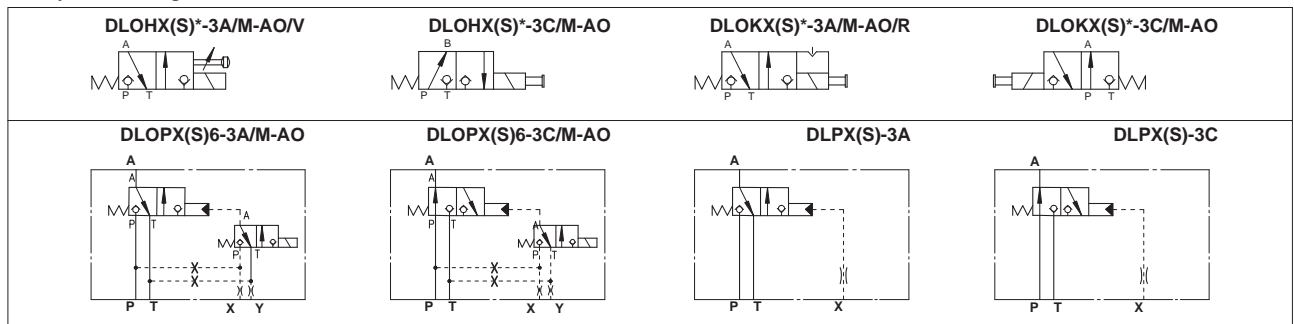

## 6 PRESSURE CONTROL VALVES: MODEL CODE

### 6.1 Screw-in type

#### CART

**MX-3**

**/ 350**

**\***

**\***

**\*\***

**\***

Screw-in relief cartridge

See note (1):

**MX(S)-3** = G1/2

**MX(S)-6** = M33x1,5

**AREX(S)-20** = M35x1,5

Pressure range:

see hydraulic characteristics in table below

Seals material:  
omit for NBR (mineral oil  
& water glycol)  
**PE** = FPM

Series number

Only for PED

\* = factory preset regulation to be defined depending to the customer requirements (example 280 = 280 bar)

Options

**PED** = reduced leakages and certified according to 97/23/CE

(1): **X**= Stainless steel execution for all parts  
**XS**= Stainless steel execution for external parts

### Hydraulic characteristics

Valve model	CART MX(S)-3	CART MX(S)-3 /PED	CART MX(S)-6	CART MX(S)-6 /PED	CART AREX(S)-20	CART AREX(S)-20 /PED
Max pressure setting [bar]	/50 /100 /210 /350 /420	/50 /100 /210 /350 /420	/50 /100 /210 /350 /420	/50 /100 /210 /350 /420	/100 /210 /315 /400	/100 /210 /315 /400
Pressure range [bar] (1)	4÷50 6÷100 7÷210 8÷350 15÷420	4÷50 6÷100 7÷210 8÷350 15÷420	2÷50 3÷100 8÷210 15÷350 15÷420	25÷100 100÷210 210÷350 350÷420	3÷50 5÷100 6÷210 8÷315 10÷400	25÷100 100÷210 210÷315 315÷400
Max flow [l/min]	2,5	2,5	40	60	120	150

(1) The values correspond to the min and max regulation of the valve's craking pressure.

### 6.2 Modular type

#### HMP

**X**

**- 011**

**/ 350**

**\*\***

**\***

Modular pressure relief valve ISO 4401 size 06

**X**= Stainless steel execution for all parts

**XS**= Stainless steel execution for external parts

Configuration, see section 6.5

**011, 013, 014**

Seals material:  
omit for NBR (mineral oil  
& water glycol)  
**PE** = FPM

Series number

Pressure range for HMP:

**50** = 50 bar

**100** = 100 bar

**210** = 210 bar

**350** = 350 bar

### 6.3 Control cover

#### LIMM

**X**

**- 2**

**/ 350**

**\*\***

**\***

Cover according to ISO 7368

**X**= Stainless steel execution for all parts

**XS**= Stainless steel execution for external parts

Size: **2** = 25

Seals material:  
omit for NBR (mineral oil  
& water glycol)  
**PE** = FPM

Series number

Pressure range

**50** = 6 ÷ 50 bar

**100** = 8 ÷ 100 bar

**210** = 10 ÷ 210 bar

**350** = 15 ÷ 350 bar

### 6.4 Standard cartridge valve to be coupled with LIMMX(S) cover

#### SC LI

**X**

**- 25**

**31**

**/ 2**

**\*\***

**\***

Cartridge according to ISO 7368

**X**= Stainless steel execution for all parts

Size 25

Area ratio 1÷1

Note: for LIMMXS cover, the standard SCLI-25\* cartridge can be used

Seals material:  
omit for NBR (mineral oil  
& water glycol)  
**PE** = FPM

Series number

Spring cracking pressure


**1** = 0,3 bar

**2** = 1,2 bar






**3** = 3 bar

**6** = 6 bar

### 6.5 Hydraulic configuration

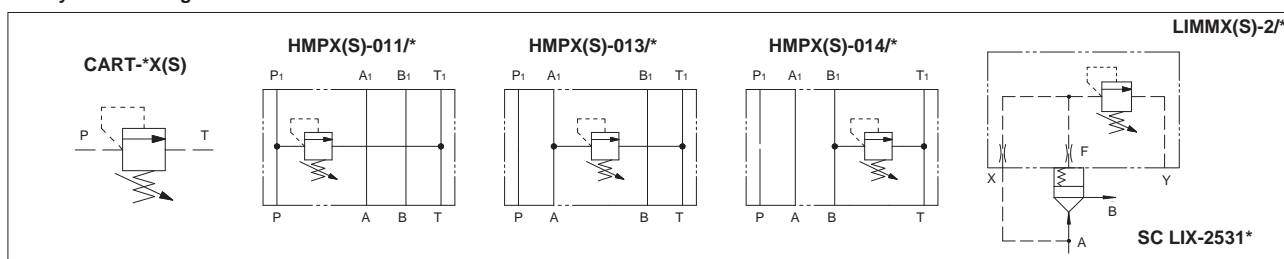

**7 Q/Δp DIAGRAMS** (based on mineral oil ISO VG 46 at 50°C)

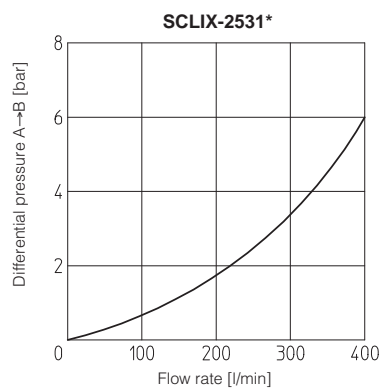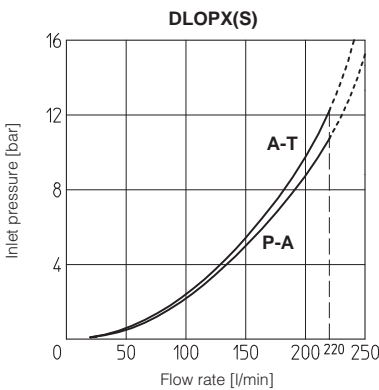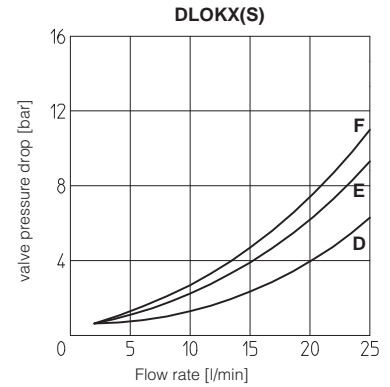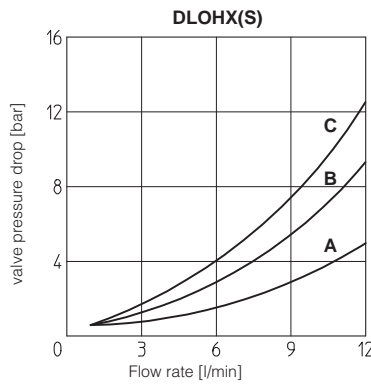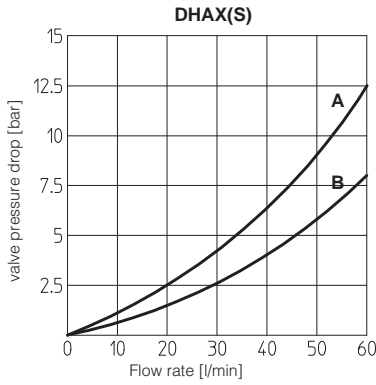


**DHAX(S)**

Spool type	Flow direction				
	P→A	P→B	A→T	B→T	P→T
0	B	B	B	B	A
1, 1/2	A	A	A	A	
3	A	A	B	B	
6	A	A	B	A	
7	A	A	A	B	


Valve type	Flow direction	
	P → A (P → B)	A → T (B → T)
<b>DLOHX(S)-3A</b>	C	B
<b>DLOHX(S)-3C</b>	B	A
<b>DLOKX(S)-3A</b>	F	E
<b>DLOKX(S)-3C</b>	E	D

**8 OPERATING LIMITS OF ON/OFF DIRECTIONAL CONTROLS** (based on mineral oil ISO VG 46 at 50°C)


The diagram have been obtained with warm solenoids and power supply at lowest value ( $V_{nom}-10\%$ ). For DHAX(S) valves the curves refer to application with symmetrical flow through the valve (i.e. P → A and B → T). In case of asymmetric flow the operating limits must be reduced.

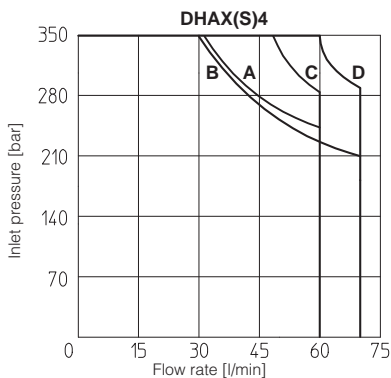


**DHAX4** A = Spools 0,1 B = Spools 1/2, 3, 6, 7  
**DHAXS4** C = Spools 0,1 D = Spools 1/2, 3, 6, 7

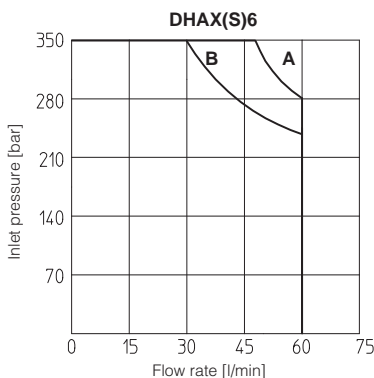


**A** = Spools 0,1 **B** = Spools 1/2, 3, 6, 7

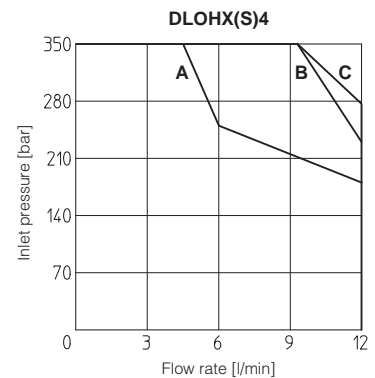


**DLOHX4** A = Spool 3C B = Spool 3A  
**DLOHXS4** C = Spools 3C, 3A

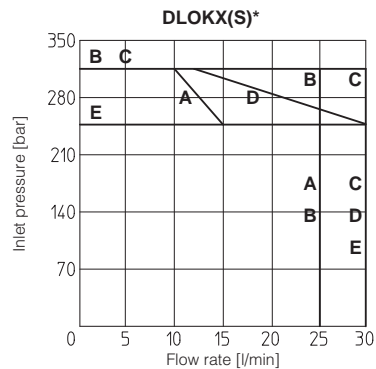

**DLOKX4** A = Spool 3C B = Spool 3A  
**DLOKXS4** C = Spool 3A D = Spool 3C  
**DLOKXS6** E = Spool 3A, 3C

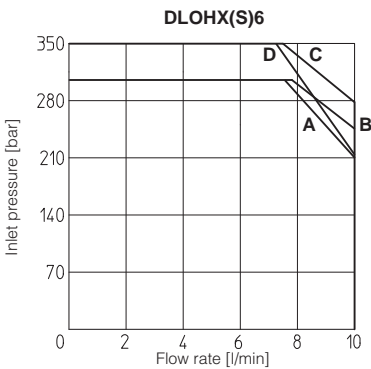







**DLOHX6** A = Spool 3A B = Spool 3C  
**DLOHXS6** C = Spool 3A D = Spool 3C

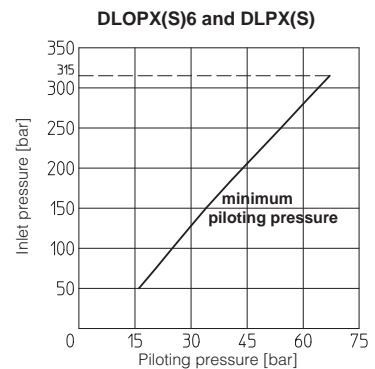




**8.1 Internal leakages** internal leakage of DLOHX(S), DLOKX(S), DLOPX(S) and DLPX(S): less than 5 drops/min (0,36 cm<sup>3</sup>/min) at max pressure.

**8.2 Piloting pressure for DLOPX(S) and DLPX(S)** max piloting pressure = 315 bar; min piloting pressure = see diagram


**9 REGULATED PRESSURE VERSUS FLOW DIAGRAM** of screw-in cartridge valves (based on mineral oil ISO VG 46 at 50°C)

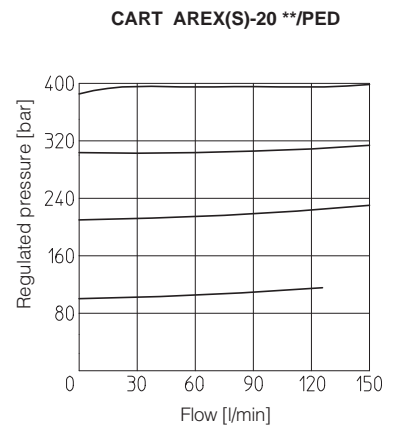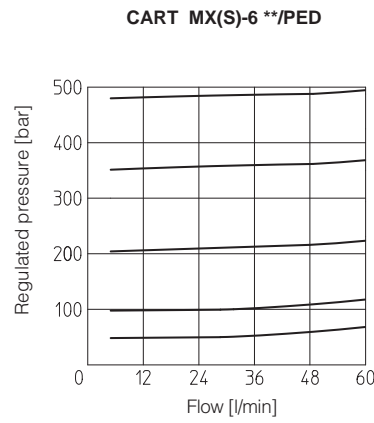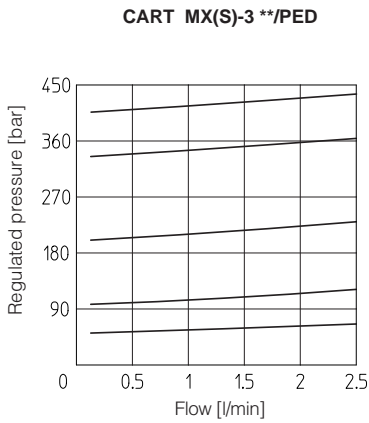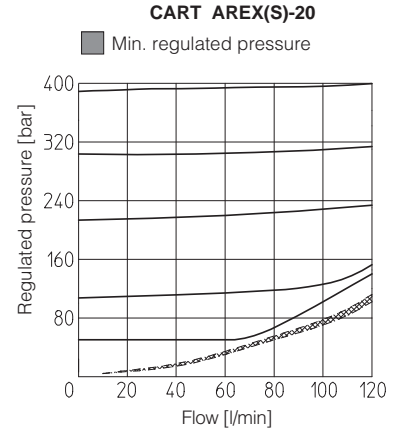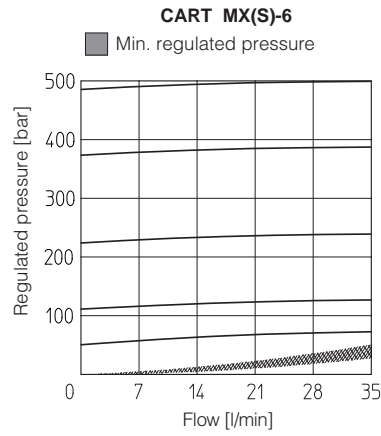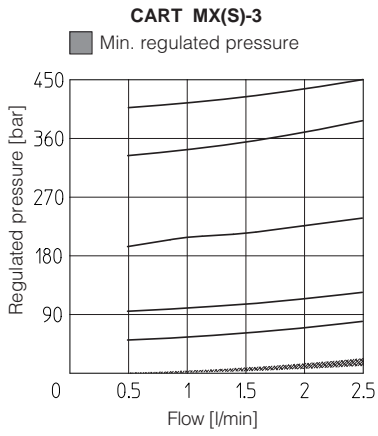


**10 PERMITTED WORKING RANGES** of screw-in cartridge valves with PED option (shared area)

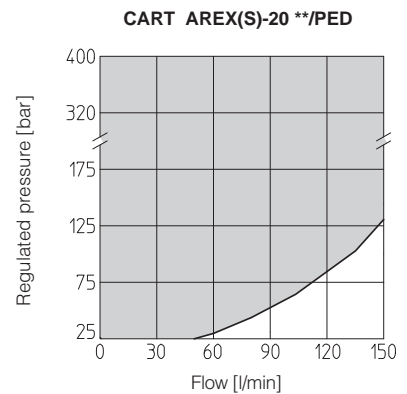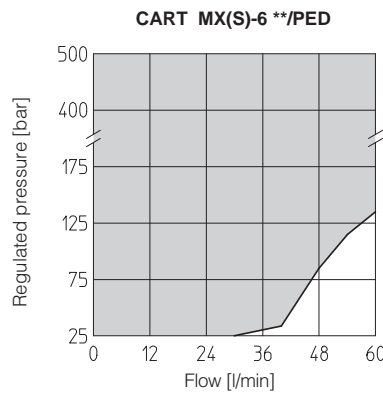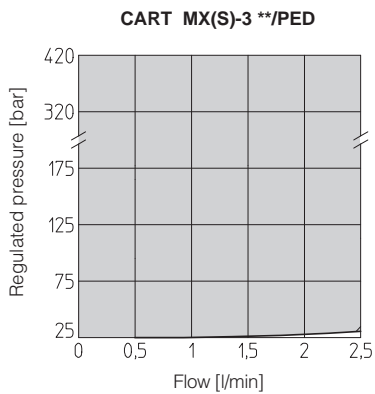


**10.1 Regulated pressure for modular valves**

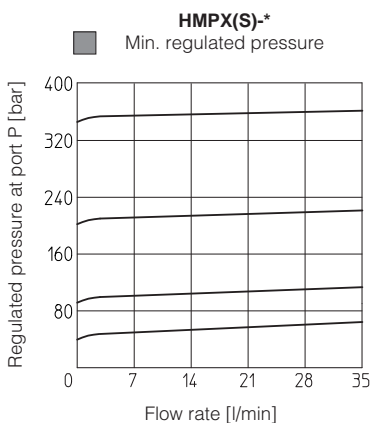

**11 INSTALLATION DIMENSIONS OF DHAX(S) [mm]**

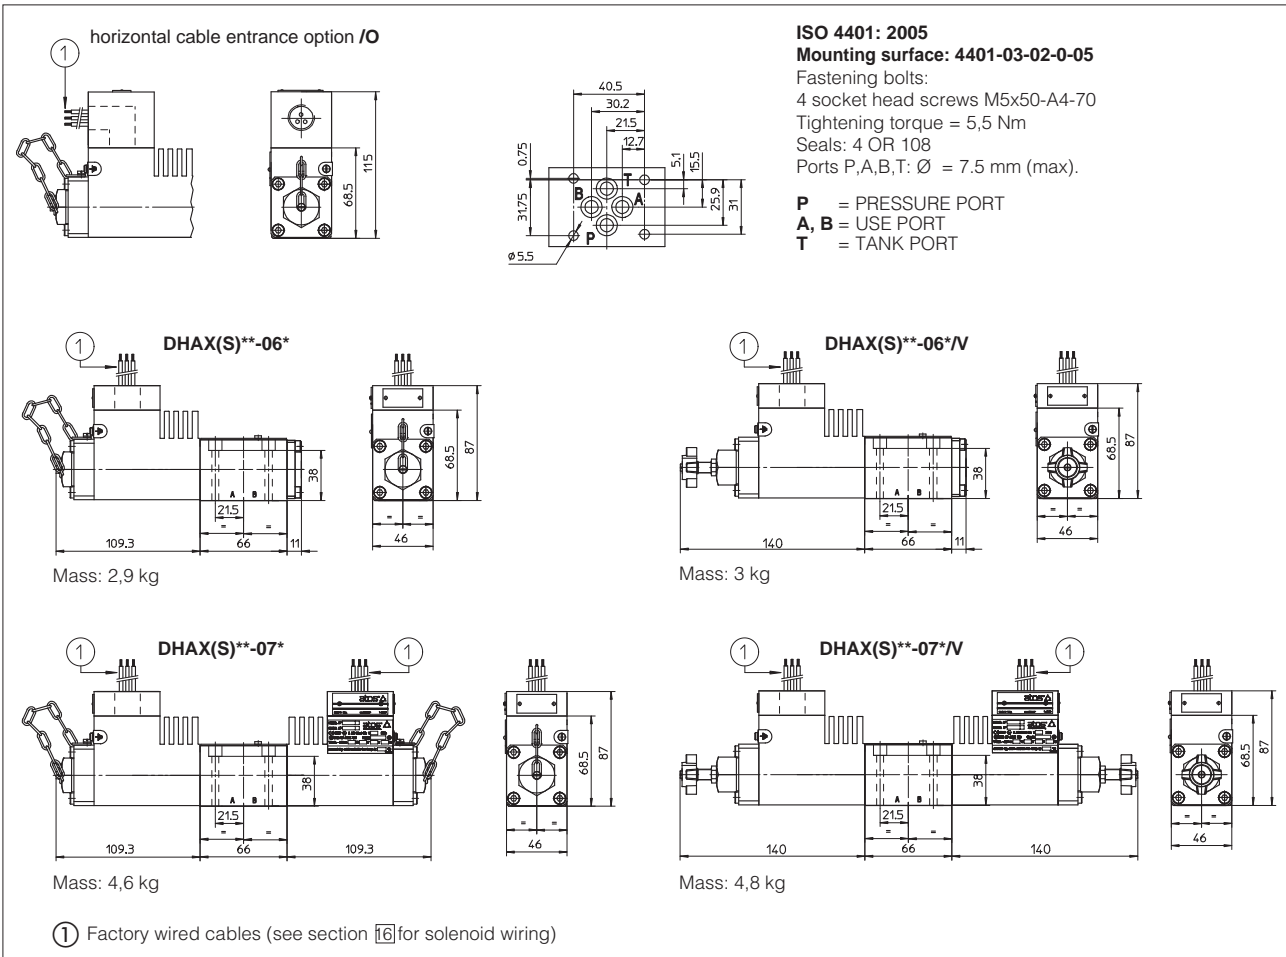

**12 INSTALLATION DIMENSIONS OF DLOHX(S) AND DLOKX(S) [mm]**



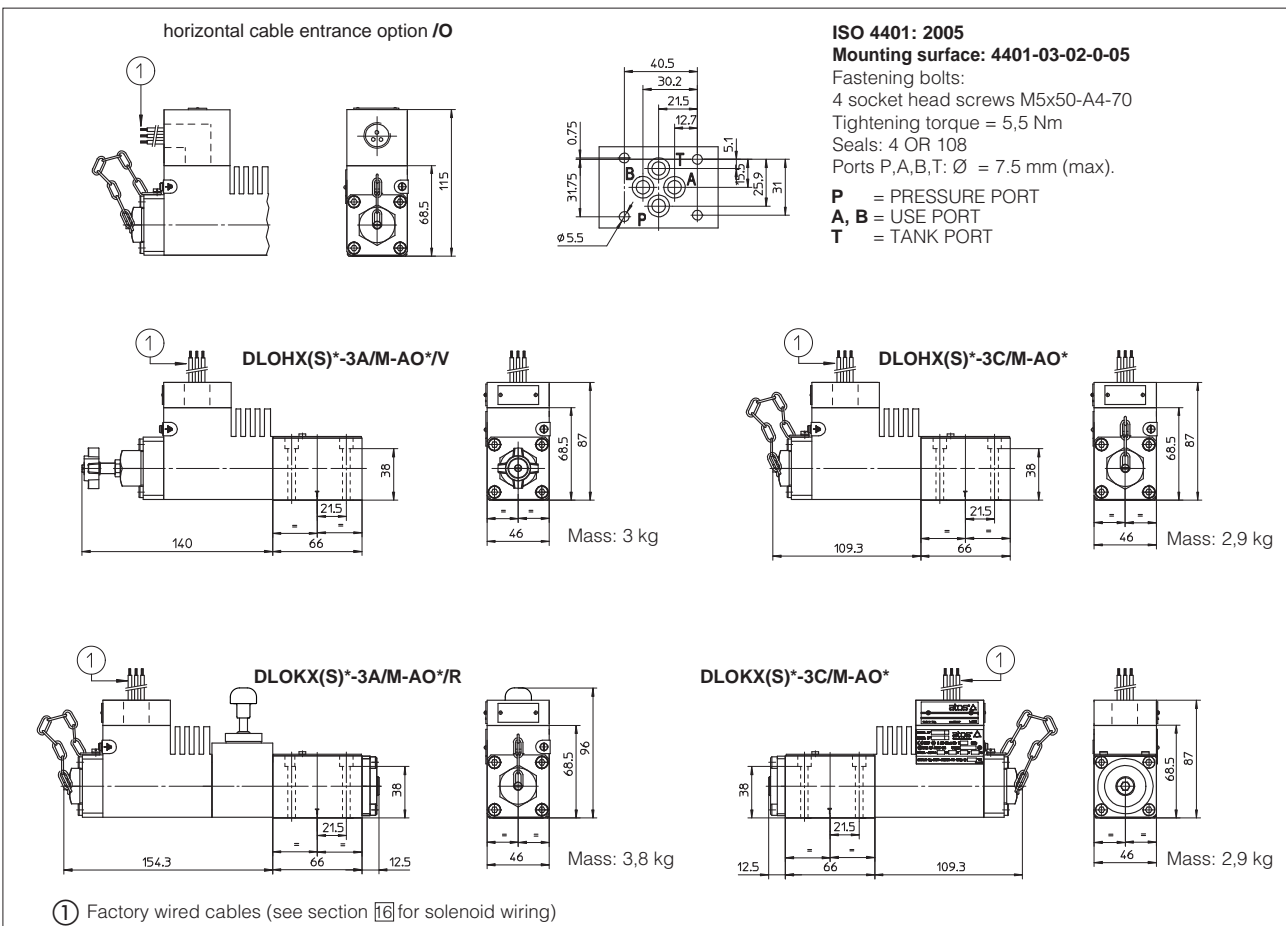









15 INSTALLATION DIMENSIONS OF MODULAR AND CARTRIDGE VALVES


ISO 4401: 2005  
 Mounting surface: 4401-03-02-0-05  
 Fastening bolts: M5x\*\*-A4-70  
 Tightening torque = 5,5 Nm  
 Seals: 4 OR 108  
 Ports P,A,B,T: Ø = 7.5 mm (max)

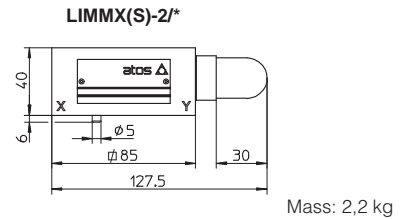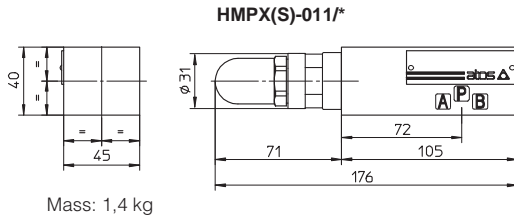

Cover interface dimensions for LIMMX(S)-2

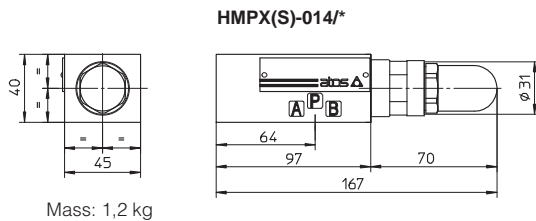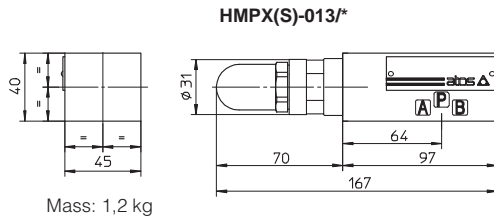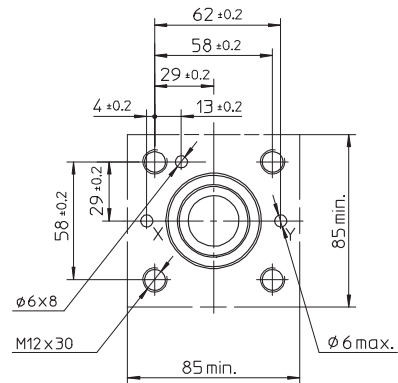


Recess dimensions for SC LIX-25

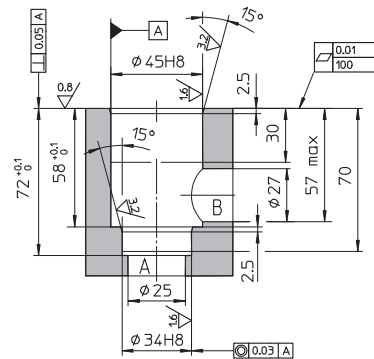

16 SOLENOID WIRING

Solenoid wiring (ATEX, IECEx)




Solenoid wiring (UL)



17 CABLE GLAND

Stainless steel cable gland PAX19/M - M20x1,5 (PG9 - IP67) for valves with ATEX certification

Stainless steel cable gland PAXIE19/M - M20x1,5 (PG9 - IP66) for valves with IECEx certification

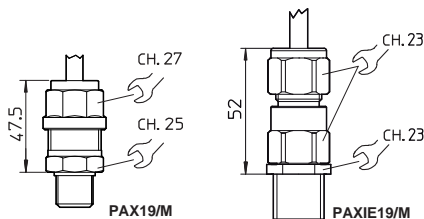

Stainless steel cable glands - available on request - are certified ATEX according to EN60079-0 and EN60079-1, or IECEx, according to IEC 60079-0, IEC 60079-7, IEC 61241-0, IEC 61241-1

The cable glands must be blocked with loctite or similar or with a lock nut.  
 The valves must be connected to the power supply using the terminal board inside the solenoid.

The cable must be suitable for the working temperature as specified in the "safety instructions" delivered with the first supply of the products.

Additional equipotential grounding can be also performed by the user on the external facility provided on the solenoid case.

Minimum section of external ground wire = 4 mm<sup>2</sup>.

Minimum section of internal ground wire = the same of supply wire.

In order to reach the terminal board inside the solenoid, the top plate of the solenoid must be removed.

Solenoids are provided with threaded connection for cable entrance: M20x1,5 (UNI-4535)