




**Chicago
Pneumatic**



SERVICE TRUCK & CONTRACTOR SERIES

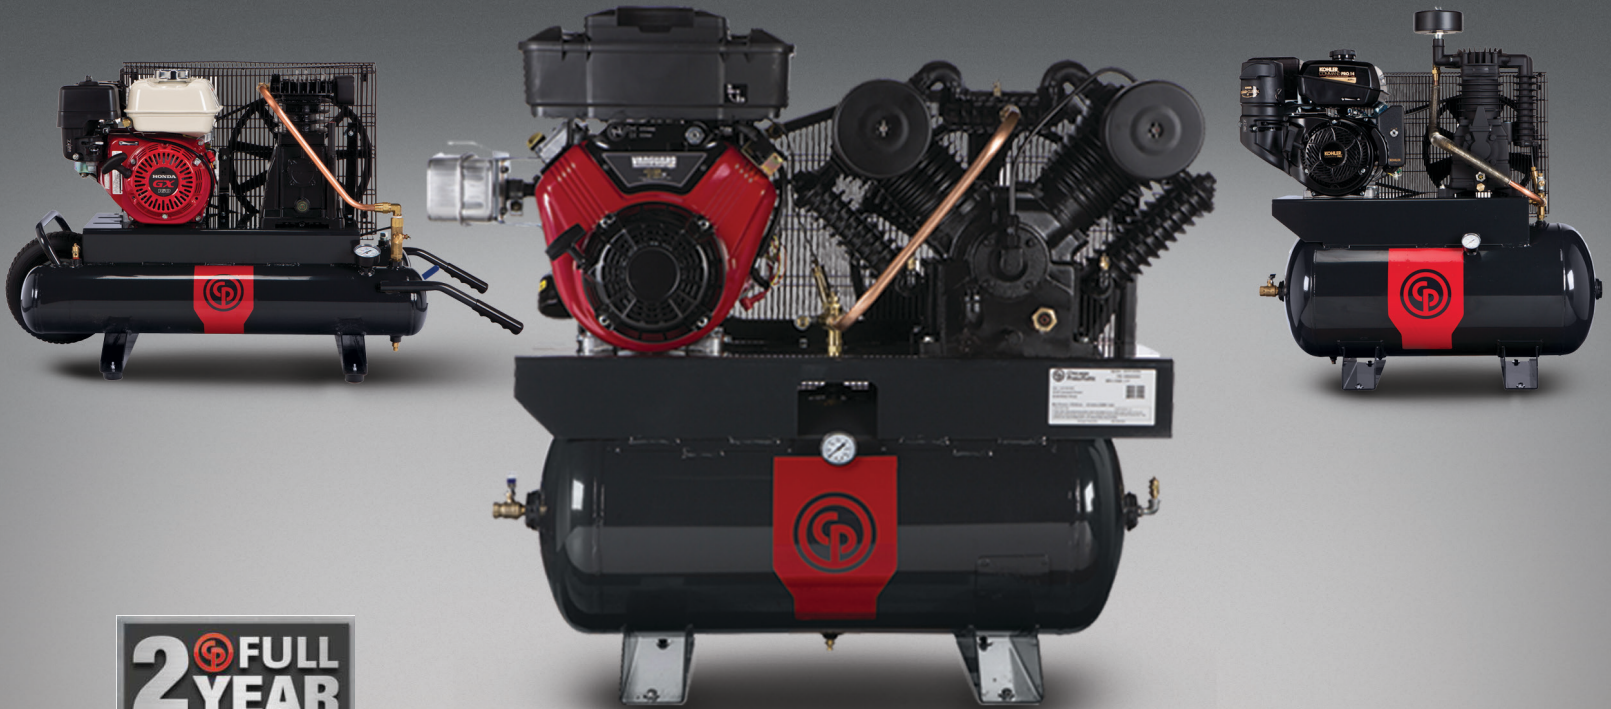

2  **FULL
YEAR
WARRANTY**
ON TWO-STAGE PISTONS

**RELIABLE AIR
ALMOST ANYWHERE YOU GO**

**Service Truck &
Contractor Series**

People. Passion. Performance.

www.comoso.com

Standard Features:

- 12 Volt electric start and recoil start
- 12 Volt alternator (Honda and Kohler Models)
- Start key / panel
- Oil monitor
- Engine slowdown (pilot valve)
- Fully enclosed belt guard
- EZ pull tank drain
- ASME tank and safety valves
- 3/4" tank discharge valve



Two Stage Gasoline Drive										
Model	HP	Engine	Electric and Recoil Start	acfm*	Max. psi	Tank gal	Weight (lbs)	L (in)	W (in)	H (in)
RCP-930G	9	Robin	Standard	16.0	175	30H	328	45	19	38
RCP-1030G	10	Intek	Standard	16.0	175	30H	328	45	19	38
RCP-1130G	11	Honda	Standard	18.5	175	30H	358	45	19	45
RCP-1330G	13	Honda	Standard	25.3	175	30H	378	45	19	45
RCP-1430GK	14	Kohler	Standard	18.5	175	30H	369	45	19	45
RCP-1430G	14	Kohler	Standard	25.3	175	30H	369	45	19	45

*Acfm at 14.7 psi atmospheric pressure, 60° F, 0% relative humidity and 100 psig working pressure.

IRON SERIES

Standard Features:

- 12 Volt electric start and recoil start
- 12 Volt alternator (Honda and Kohler Models)
- Start key / panel
- Oil monitor
- Engine slowdown (pilot valve)
- Fully enclosed belt guard
- EZ pull tank drain
- ASME tank and safety valves
- 3/4" tank discharge valve



Gasoline Models										
Model	HP	Engine	Electric and Recoil Start	acfm*	Max. psi	Tank zgal	Weight (lbs)	L (in)	W (in)	H (in)
RCP-C1130G	11	Honda	Standard	18	175	30H	481	45	19	43
RCP-C1330G	13	Honda	Standard	23	175	30H	501	45	19	43
RCP-C1430G	14	Kohler	Standard	23	175	30H	492	45	19	43
RCP-C1630G	16	Briggs Vanguard	Standard	35	175	30H	550	48	19	43

*Acfm at 14.7 psi atmospheric pressure, 60° F, 0% relative humidity and 100 psig working pressure.

Standard Features:

- Engine slowdown (pilot valve)
- Engine oil protection
- Fully enclosed belt guard
- Tank drains and discharge valve
- ASME safety valves on tank and pump



Single Stage Gasoline Drive Contractor Series										
Model	HP	Engine	Starter	acfm*	Max. psi	Tank gal	Weight (lbs)	L (in)	W (in)	H (in)
RCP-5530	5.5	Honda	Recoil	12.4	175	2 x 4	221	46	23	26
RCP-6030	6	Robin	Recoil	12.4	175	2 x 4	221	46	23	26

*Acfm at 14.7 psi atmospheric pressure, 60° F, 0% relative humidity and 100 psig working pressure.

Two Stage Gasoline Drive Contractor Series										
Model	HP	Engine	Starter	acfm*	Max. psi	Tank gal	Weight (lbs)	L (in)	W (in)	H (in)
RCP-908R	9	Robin	Recoil	18.6	175	2 x 5	316	50	29	37
RCP-908H	9	Honda	Recoil	18.6	175	2 x 5	316	50	29	37
RCP-128-I	14	Kohler	Elec & Recoil	25.3	175	2 x 5	345	50	29	37

*Acfm at 14.7 psi atmospheric pressure, 60° F, 0% relative humidity and 100 psig working pressure.

Standard Features:

- Start/stop pressure switch control
- Fully enclosed belt guard
- Tank drains and safety valves on each tank



Single Stage Electric Contractor Series										
Model	HP	Amps	Electrics Voltage/Phase	acfm*	Max. psi	Tank gal	Weight (lbs)	L (in)	W (in)	H (in)
RCP-2030	2	19/9.5	115/230/1	6.5	175	2 x 4	130	46	23	26

*Acfm at 14.7 psi atmospheric pressure, 60° F, 0% relative humidity and 100 psig working pressure.

www.cp.com

© 2015 Chicago Pneumatic. All Rights Reserved.
Content is subject to change without notice.

04/15 002

For more information,
call 877.861.2722.

