

M12 DISTRIBUTION SYSTEMS (PLASTIC)

For general applications

– Sets (basic module and cap)


– Field-wireable

Approvals:  UL Listed

MVP12 UNIVERSAL

4-way

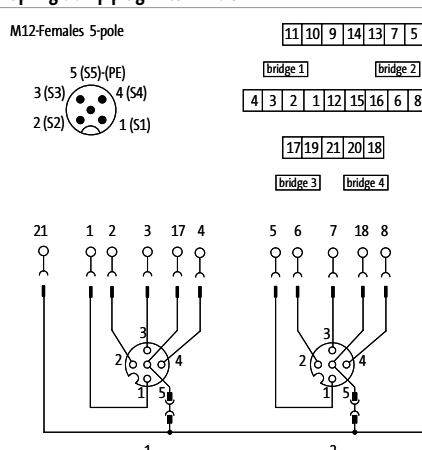

1 Form		44742	44752
Type		universal, without LED, 5-pole (for analog signals) Spring clamp plug-in terminals	universal, without LED, 5-pole (for analog signals) Screw plug-in terminals
Contact layout		<p>M12-Females 5-pole</p>  <p>free arrangeable, contact 1:1 on terminals for 5 signals per port, possibility to bridge each PIN5</p>	
Technical Data			
Operating voltage		max. 42 V AC/DC	
Operating current per contact		max. 4 A	
Total current		max. 8 A	
Connection		Spring clamp plug-in terminals: max. 1.5 mm ² (AWG 16)	Screw plug-in terminals: max. 1.5 mm ² (AWG 16)
Protection		IP65, IP67	
Housing		Plastic, flame retardant	
Temperature range		-20...+80 °C	
Contact Layout			
Contact 1		(S1)	
Contact 2		(S2)	
Contact 3		(S3)	
Contact 4		(S4)	
Contact 5		(S5)/(Earth)	
Article No.			
The composition of your article number is explained on page 3.1.i		8 0 0 0	0 0 0 0
		1 Form	
Notes			