




(See Electrical Options Below)

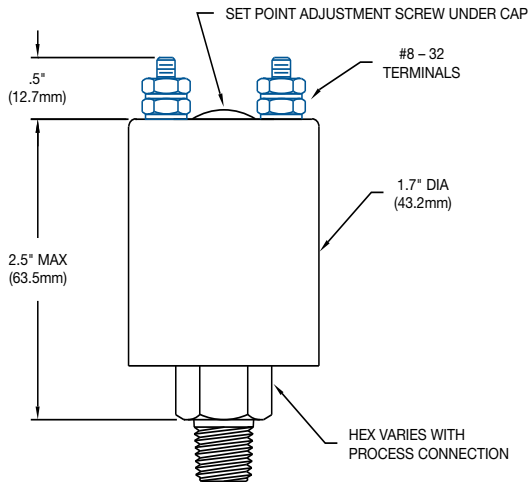


Features

- Long-life elastomer diaphragm
- High-quality snap-action switch
- Factory preset or field adjustable
- Available in a wide range of configurations
- Economical
- NEMA 4, 13

Operating Specifications

| | | |
|-----------------------------------|-----------------------------------|--------------------------|
| Set Point Range | 3" — 29" Hg | (76mm — 736mm Hg) |
| Set Point Tolerance | ±2" Hg | (50mm Hg) |
| Maximum Operating Pressure | 250 PSI | (17 Bar) |
| Differential | 20 — 40% | |
| Current Rating | 5 A @ 250 VAC | 5 A @ 30 VDC (Resistive) |
| Media Connection | See Order Chart Below for Options | |
| Circuit Form | SPST-NO, SPST-NC or SPDT | |
| Electrical Connection | See Order Chart Below for Options | |
| Diaphragm Material | Buna N | |
| Cycle Life | 1 Million | |

How to Order (Example: Part Number: **NV- 1A - 20R / QC**)

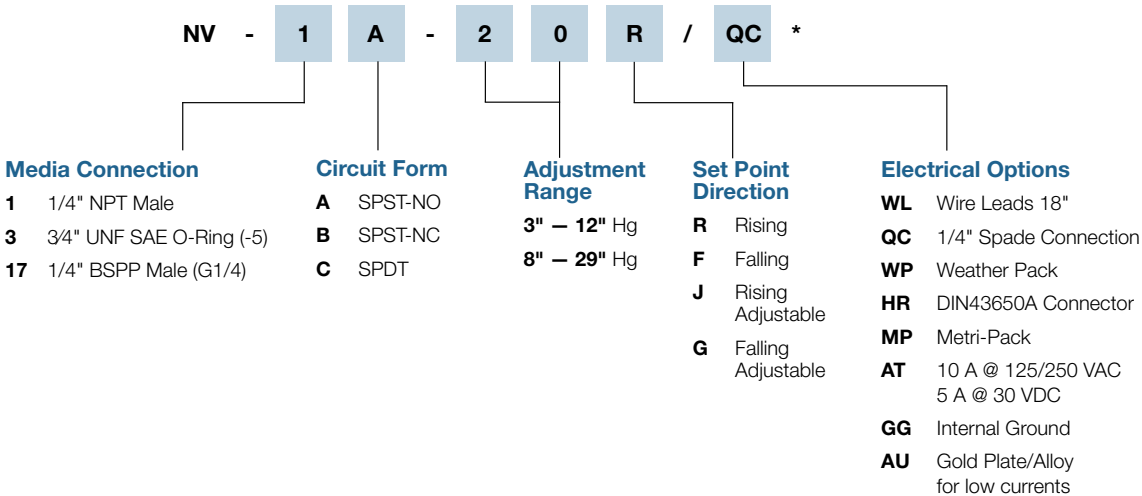

* Defaults to Screw Terminals