


### Features

- Long-life elastomer diaphragm
- High-quality snap-action switch
- Factory preset or field adjustable
- Available in a wide range of configurations
- Economical
- NEMA 4, 13

### Operating Specifications

<b>Set Point Range</b>	1" – 29" Hg	(25mm – 736mm Hg) 14" – 394" H <sub>2</sub> O
<b>Set Point Tolerance</b>	±2" Hg	(50mm Hg)
<b>Maximum Operating Pressure</b>	250 PSI	(17 Bar)
<b>Differential</b>	20 – 40%	
<b>Current Rating</b>	10 A @ 125/250 VAC	5 A @ 30 VDC
<b>Media Connection</b>	See Order Chart Below for Options	
<b>Circuit Form</b>	SPST-NO, SPST-NC or SPDT	
<b>Electrical Connection</b>	See Order Chart Below for Options	
<b>Diaphragm Material</b>	Buna N	
<b>Cycle Life</b>	1 Million	

### How to Order (Example: Part Number: **VP - 1A - 25R / MP**)

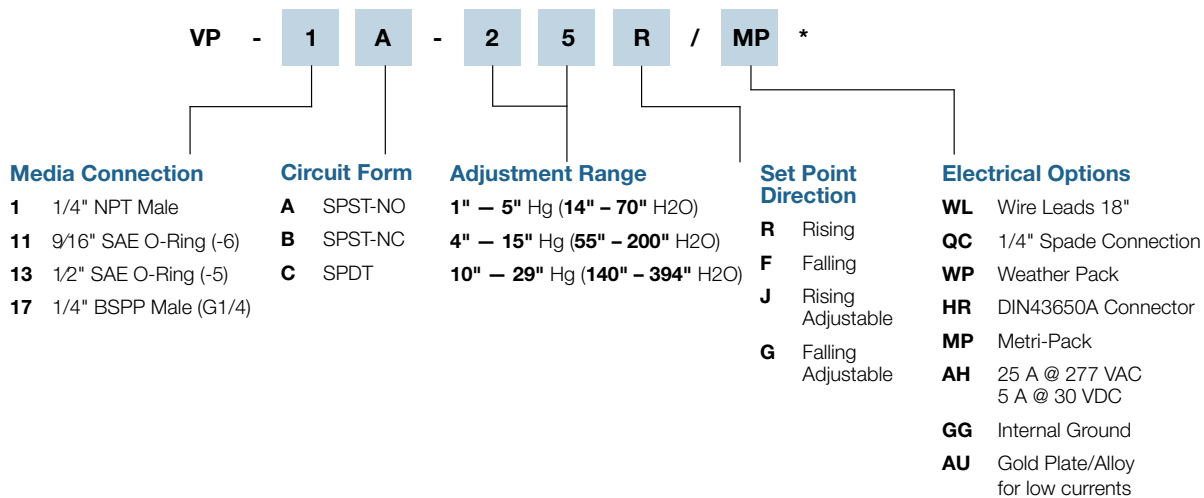

\* Defaults to Screw Terminals