



aerospace
climate control
electromechanical
filtration
fluid & gas handling
hydraulics
pneumatics
process control
sealing & shielding



Compact Spiral™ Hose

Unprecedented performance and flexibility



ENGINEERING YOUR SUCCESS.

Unprecedented 5000- and 6000-psi hose performance in a compact design.

Compared with conventional spiral hose, Parker's Compact Spiral™ 787TC/797TC hose offers measurably greater advantages in routing and installation, product size and weight, inventory savings and much more. A world's first, this development is the most significant advancement in hydraulic hose since the introduction of Parker's No-Skive™ technology more than 25 years ago.

Compact Spiral was developed in concurrence with the industry trend toward high-pressure hose manufactured to meet ISO 18752 performance specifications.


Its many innovative and proprietary features set new standards in value and deliver hose characteristics deemed most important by OEM and aftermarket customers.



Compact Spiral Hose has half the bend radius of its SAE counterpart and a significantly smaller bend radius than corresponding-size Parker conventional spiral hose.

Compact Spiral™ Bend Radius

Not only is it **1/2 the bend radius**, but it takes **1/3 less effort** to bend.

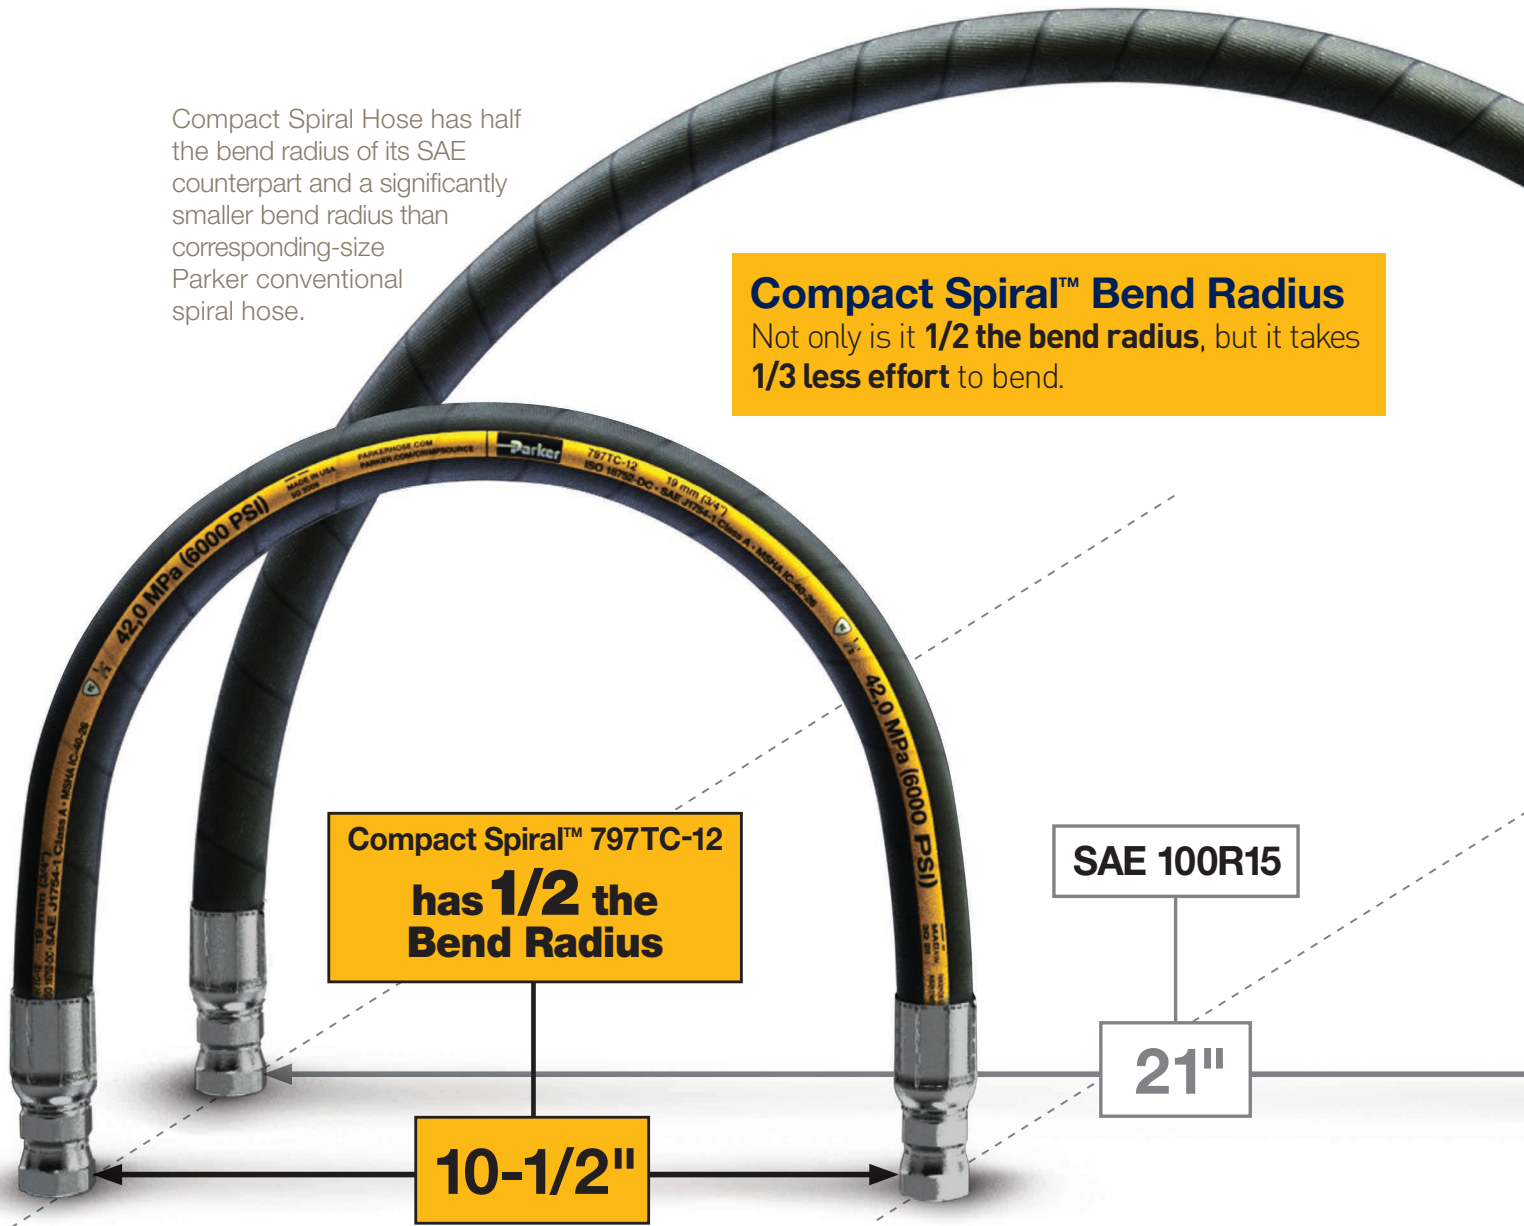

Compact Spiral™ 797TC-12

has **1/2 the Bend Radius**

SAE 100R15

21"

10-1/2"

Half the bend radius with one-third less effort

Providing remarkable flexibility and routing ease, the bend radius of Compact Spiral 787TC/797TC is respectively half that of SAE 100R13/SAE 100R15 conventional spiral hose.

VALUE

Half the bend radius can reduce your hose needs 20% to 55%.

Nearly 30% smaller O.D.

A key reason for Compact Spiral's notably easier handling and routing, this feature also enables bends to start sooner than with conventional spiral, resulting in hose savings, reduction of shaped hose ends – and there is less chance of over-bending.

VALUE


Smaller O.D. enables you to fit more hose in tight quarters or helps you jump up a hose size for better flow characteristics.

Twice the impulse

Compact Spiral Hose is tested to 2,000,000 cycles – two times the ISO 18752-DC impulse cycle standard and four times the SAE impulse requirement. The result is a hose superior in both performance and service life.

VALUE

Twice the impulse life increases your hose life in your application, extending the time between replacements.

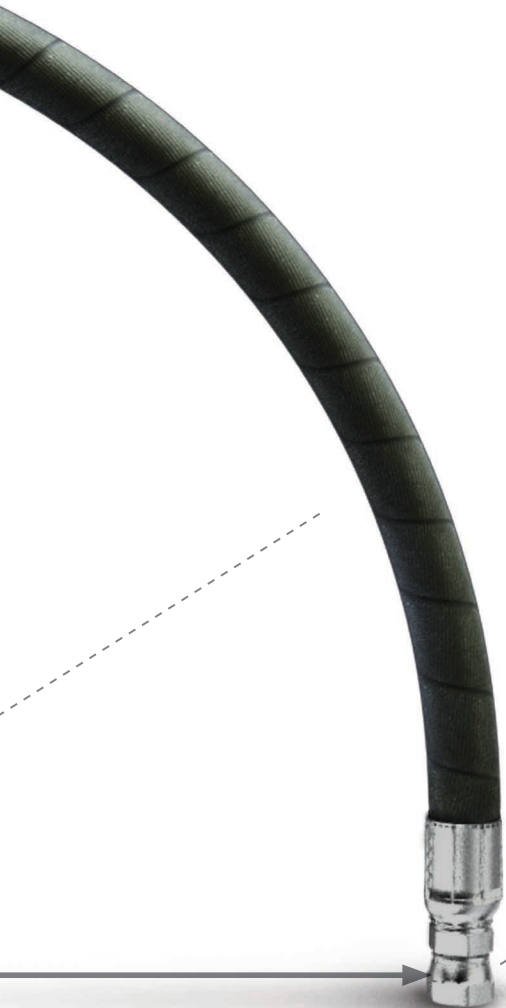

High abrasion resistance

The highly abrasion-resistant cover of Compact Spiral Hose delivers long, dependable service life in rigorous and/or remote installations.

VALUE

Parker's Tough Cover™ will outlast non-abrasion resistant covers, extending hose life and increasing intervals between hose change outs.

Constant pressure

Made to ISO 18752 hose specifications, Compact Spiral 787TC (5000 psi) and 797TC (6000 psi) each provide constant-pressure performance across all sizes.

Less-bulky inner tube and outer wall construction results in up to one-third smaller Compact Spiral Hose O.D. area, enabling easier routing, hose savings and space savings.

100R15


797TC-12




Increased Flexibility

Many hoses today are rated to 1/2 SAE bend radius, but can you get them there? Compact Spiral's design and process technology make it the most flexible and easiest to bend spiral hose on the market.

787TC Force to Flex

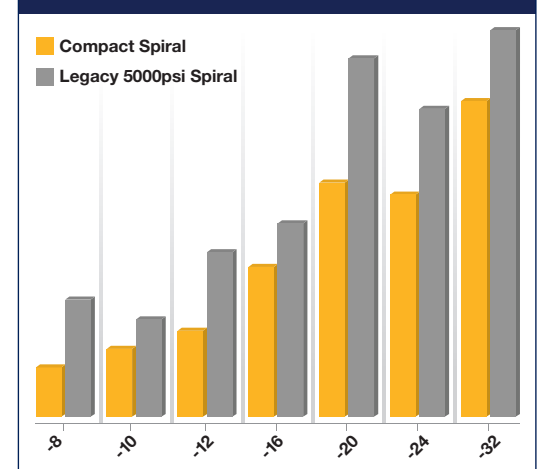

797TC Force to Flex

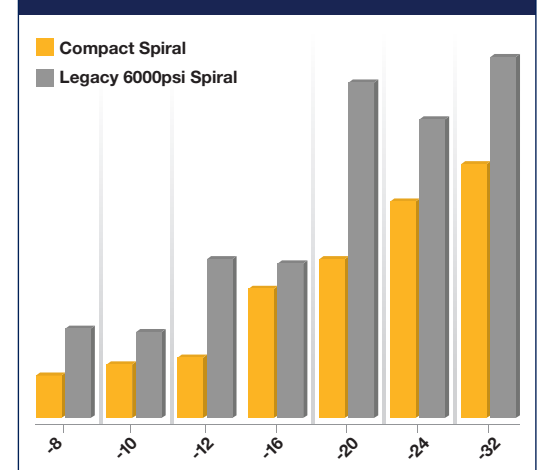

Less force to flex means

improved and easier routing, resulting in reduced installer fatigue and faster installation times for greater overall efficiency.

Interlock No-Skive design

Compact Spiral 787TC/797TC is rated to ISO 18752 Type DC/CC


ISO 18752 Performance Definitions (4.2 Grades and Types)				
Grade	Type ^a	Resistance to Impulse		
		Temperature °C	Impulse Pressure (% of MWP ^b)	Minimum Number of Cycles
A	AS	100	133%	200,000
	AC			
B	BS	100	133%	500,000
	BC			
C	CS	120	133% and 120% ^c	500,000
	CC			
D	DC	120	133%	1,000,000

^a Standard or compact, e.g. CS is grade C and standard type.
Standard types have larger outside diameters and larger bend radii and compact types have smaller outside diameters and smaller bend radii.

^b Maximum working pressure.

^c 120% of the MWP shall be used for classes 350, 420 and 560 instead of 133%.


ISO 18752 classifies according to their resistance to impulse into four grades: A, B, C and D. Each grade is classified by outside diameter into standard types (AS, BS and CS) and compact types (AC, BC, CC and DC) as shown in this table.

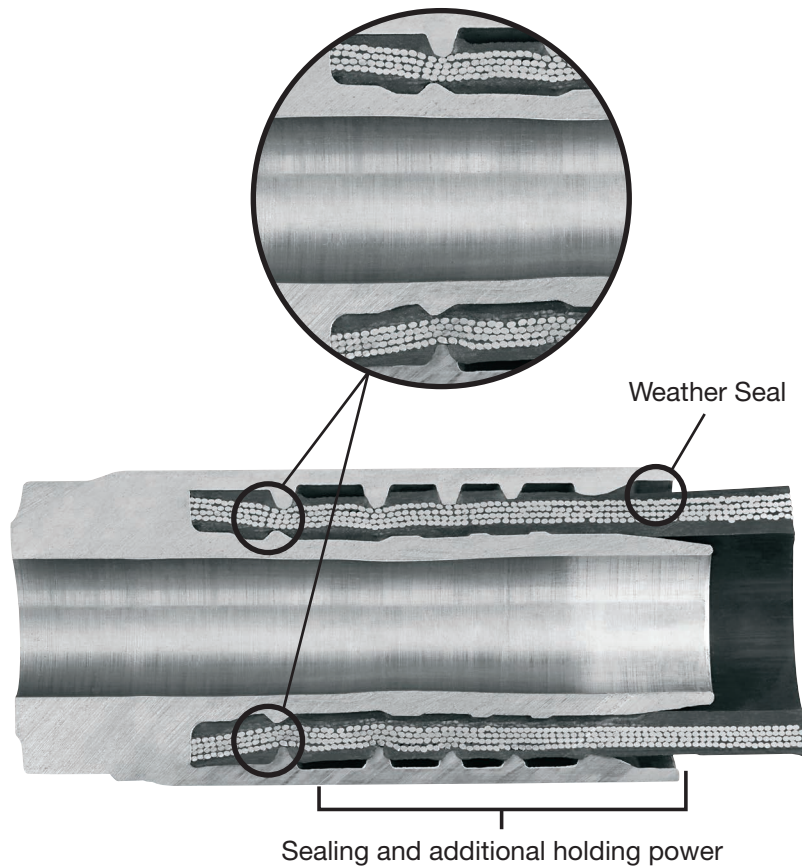

Compact Spiral Hose features Parker's exclusive Interlock No-Skive design, with both internal and external "Bite the Wire" technology for assured connection strength.

VALUE

Better hose to fitting connection reduces leaks and increases holding power.

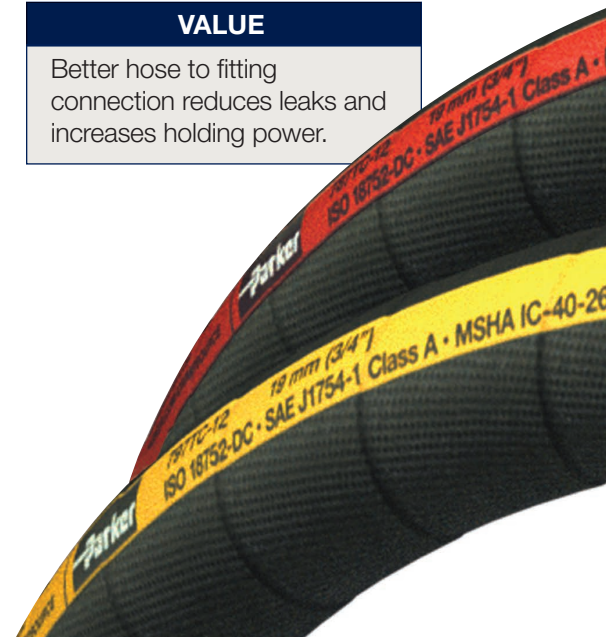



Just one series of hose ends, Parker's 77 Series, covers all sizes of both 787TC and 797TC Compact Spiral hose, simplifying fitting selection and reducing hose-end inventory.

Wide fluid compatibility

Parker's patent-pending inner tube compound provides enhanced fluid compatibility (e.g., environmental fluids, Polyol Esters), improved tube aging and prolonged life.

VALUE

Reduces need for specialty hoses for non standard fluids. Better heat aging of tube extends hose life.

Advancing the industry


Compact Spiral hose delivers substantial performance and value for systems with high pressure, high impulse applications. These include injection molding, oil and gas, and large mobile equipment including off-highway, construction, forestry and mining.


Surveys in these markets have indicated pressure rating, routing ease, abrasion resistance, bend radius and weight as being top priorities in hose selection for such applications.



Many Parker crimper models such as KarryKrimp® 2, used for crimping smaller-size hose, and Parkrimp® 2 can be used to crimp 787TC and 797TC Compact Spiral hose.

Contact your local Parker representative for a demonstration of Compact Spiral today.

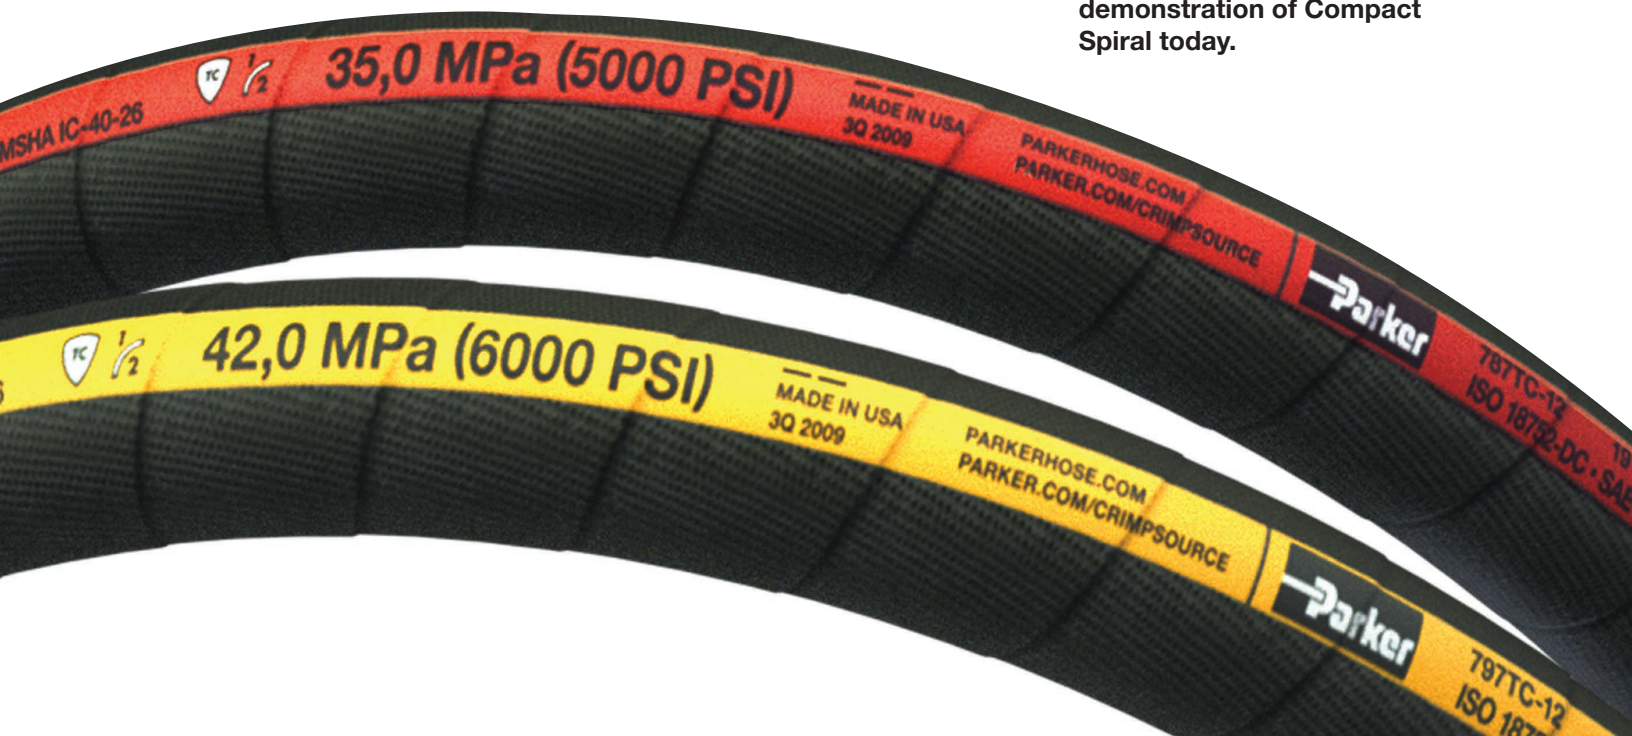

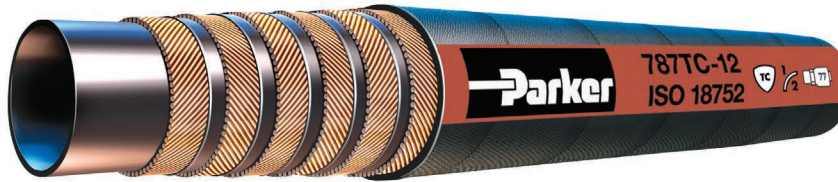

787TC ISO 18752-DC

Part Number #	ISO 18752 Performance Grade	Hose I.D.		Hose O.D.		Working Pressure		Minimum Bend Radius		Weight		Parkrimp
		Inch	mm	Inch	mm	psi	MPa	Inch	mm	lbs/ft	kg/m	77 Series
787TC-8	DC	1/2	12,5	0.83	21,1	5000	35,0	3-1/2	90	0.45	0,67	●
787TC-10	DC	5/8	16	0.94	23,9	5000	35,0	4	100	0.54	0,80	●
787TC-12	DC	3/4	19	1.10	27,9	5000	35,0	4-3/4	120	0.78	1,16	●
787TC-16	DC	1	25	1.40	35,7	5000	35,0	6	150	1.17	1,74	●
787TC-20	DC	1-1/4	31,5	1.77	44,9	5000	35,0	8-1/4	210	1.95	2,89	●
787TC-24	DC	1-1/2	38	2.08	52,8	5000	35,0	10	255	2.66	3,96	●
787TC-32	DC	2	51	2.66	67,6	5000	35,0	12-1/2	318	4.37	6,50	●

Application: Petroleum base hydraulic fluids and lubricating oils


Inner tube: Proprietary synthetic rubber

Reinforcement: Four or six spiral steel wires

Cover: Synthetic rubber, MSHA accepted

Temperature range:
-40°C to +125°C
(-40°F to +257°F)

Manufactured to ISO 18752 specifications, Parker Compact Spiral Hose delivers significant advantages in routing and installation ease, system size and weight, inventory savings and much more, over SAE 100R13 and 100R15 hose.

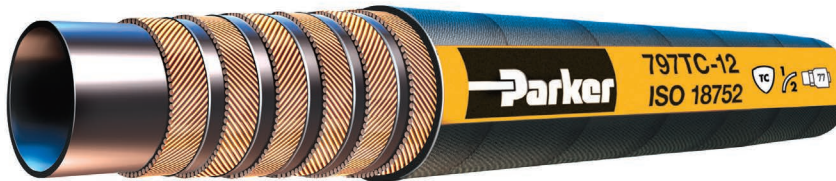

797TC ISO 18752

Part Number #	ISO 18752 Performance Grade	Hose I.D.		Hose O.D.		Working Pressure		Minimum Bend Radius		Weight		Parkrimp
		Inch	mm	Inch	mm	psi	MPa	Inch	mm	lbs/ft	kg/m	77 Series
797TC-8	DC	1/2	12,5	0.83	21,1	6000	42,0	4	100	0.45	0,67	●
797TC-10	DC	5/8	16	0.94	23,9	6000	42,0	4-1/2	115	0.54	0,80	●
797TC-12	DC	3/4	19	1.10	27,9	6000	42,0	5-1/4	135	0.78	1,16	●
797TC-16	DC	1	25	1.40	35,7	6000	42,0	6-1/2	165	1.17	1,74	●
797TC-20	DC	1-1/4	31,5	1.77	44,9	6000	42,0	8-3/4	225	1.95	2,89	●
797TC-24	CC	1-1/2	38	2.08	52,8	6000	42,0	12	305	2.66	3,96	●
797TC-32	CC	2	51	2.66	67,6	6000	42,0	15	380	4.37	6,50	●

Application: Petroleum base hydraulic fluids and lubricating oils

Inner tube: Proprietary synthetic rubber

Reinforcement: Four or six spiral steel wires

Cover: Synthetic rubber, MSHA accepted

Temperature range:
-40°C to +125°C
(-40°F to +257°F)

Manufactured to ISO 18752 specifications, Parker Compact Spiral Hose delivers significant advantages in routing and installation ease, system size and weight, inventory savings and much more, over SAE 100R13 and 100R15 hose.

Parker Fluid Connectors Group

North American Divisions & Distribution Service Centers

Your complete source for quality tube fittings, hose & hose fittings, brass & composite fittings, quick-disconnect couplings, valves and assembly tools, locally available from a worldwide network of authorized distributors.

Fittings:

Available in inch and metric sizes covering SAE, BSP, DIN, GAZ, JIS and ISO thread configurations, manufactured from steel, stainless steel, brass, aluminum, nylon and thermoplastic.

Hose, Tubing and Bundles:

Available in a wide variety of sizes and materials including rubber, wire-reinforced, thermoplastic, hybrid and custom compounds.

Worldwide Availability:

Parker operates Fluid Connectors manufacturing locations and sales offices throughout North America, South America, Europe and Asia-Pacific.

For information, call toll free...

1-800-C-PARKER
(1-800-272-7537)

North American Divisions

Energy Products Division

Stafford, TX
phone 281 566 4500
fax 281 530 5353

Fluid System Connectors Division

Otsego, MI
phone 269 694 9411
fax 269 694 4614

Hose Products Division

Wickliffe, OH
phone 440 943 5700
fax 440 943 3129

Industrial Hose Division

Strongsville, OH
phone 440 268 2120
fax 440 268 2230

Parflex Division

Ravenna, OH
phone 330 296 2871
fax 330 296 8433

Quick Coupling Division

Minneapolis, MN
phone 763 544 7781
fax 763 544 3418

Tube Fittings Division

Columbus, OH
phone 614 279 7070
fax 614 279 7685

Distribution Service Centers

Buena Park, CA

phone 714 522 8840
fax 714 994 1183

Conyers, GA

phone 770 929 0330
fax 770 929 0230

Lakeville, MN

phone 952 469 5000
fax 952 469 5729

Louisville, KY

phone 502 937 1322
fax 502 937 4180

Portland, OR

phone 503 283 1020
fax 503 283 2201

Toledo, OH

phone 419 878 7000
fax 419 878 7001
fax 419 878 7420
(FCG Kit Operations)

Canada

Grimsby, ONT

phone 905 945 2274
fax 905 945 3945
(Contact Grimsby for other Service Center locations.)

© 2013 Parker Hannifin Corporation

Parker Hannifin Corporation

Fluid Connectors Group

Hose Products Division

30240 Lakeland Boulevard

Wickliffe, OH 44092

phone 440 943 5700

fax 440 943 3129

e-mail HPDSales@Parker.com

www.parker.com

KarryKrimp is a registered trademark, and Compact Spiral and No-Skive are trademarks of Parker Hannifin Corporation
4480-B150 9/2013

