




aerospace
climate control
electromechanical
filtration
fluid & gas handling
hydraulics
pneumatics
process control
sealing & shielding

Basic	1/4"
	1/2"
Comfort	1/4"
	1/2"

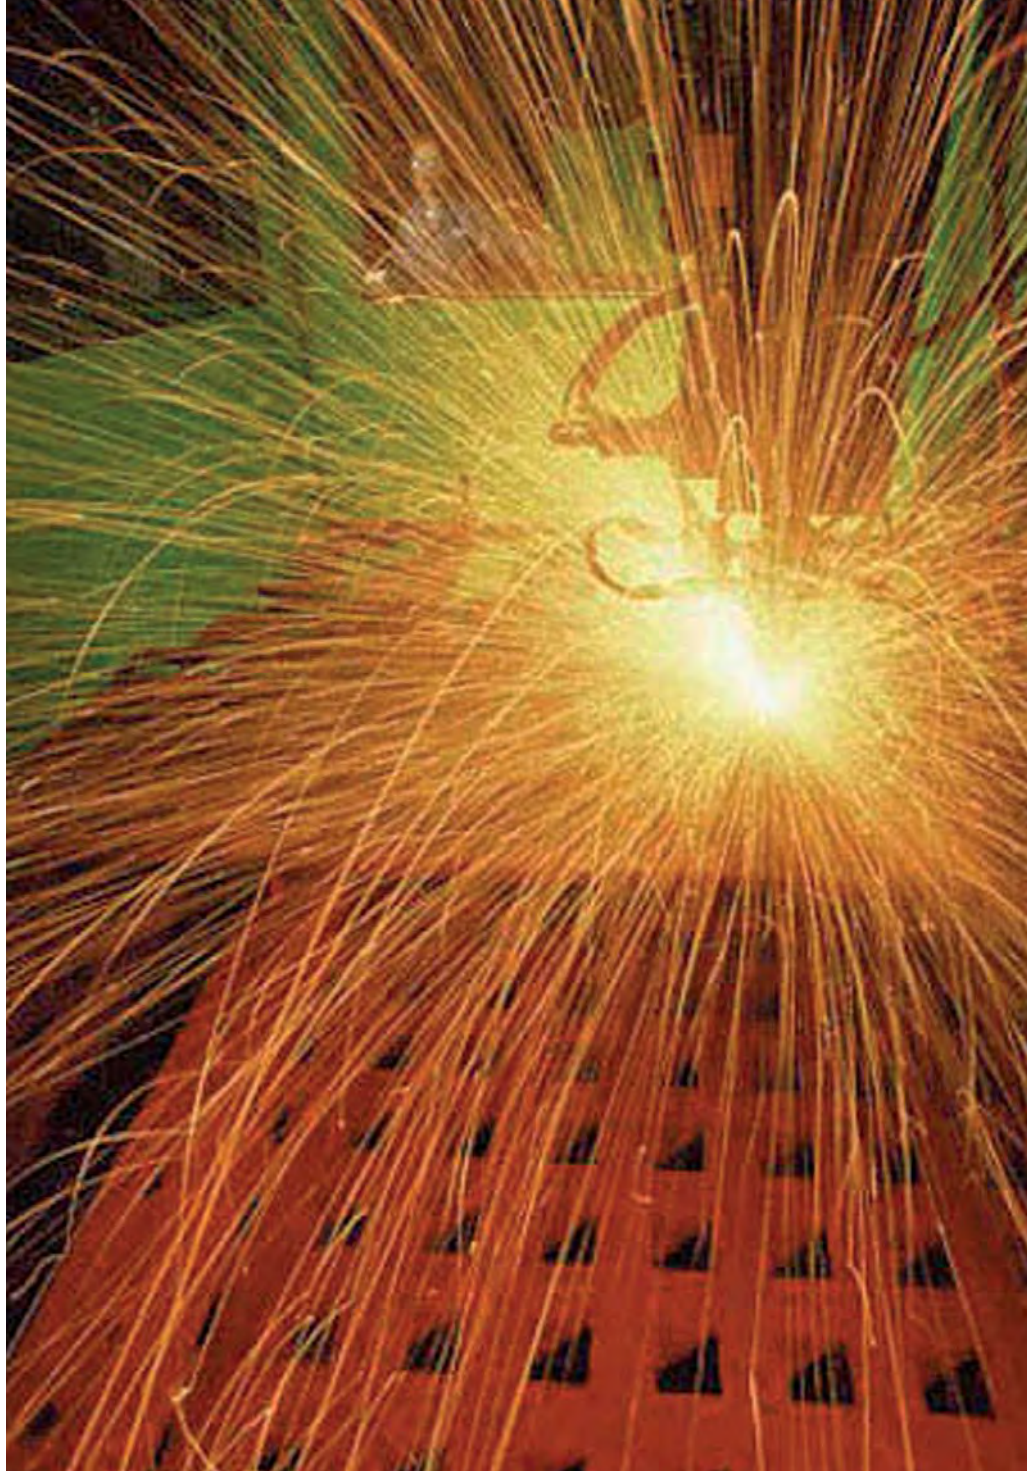

Proportional Pressure Regulation

Lucifer® Programmable EPP4 regulators
1/4" and 1/2" Comfort range



ENGINEERING YOUR SUCCESS.

Market and/or Sub Market Description

Robotics

Paper industry

Machine tools

Mobile

Buildings

Textile

Instrumentation

Semi conductor



Description of Applications

Welding

Speed and brake control

Sanding

Cutting

Humidification



Tension regulation

Painting


Presses

Polishing

Adaptative suspension control

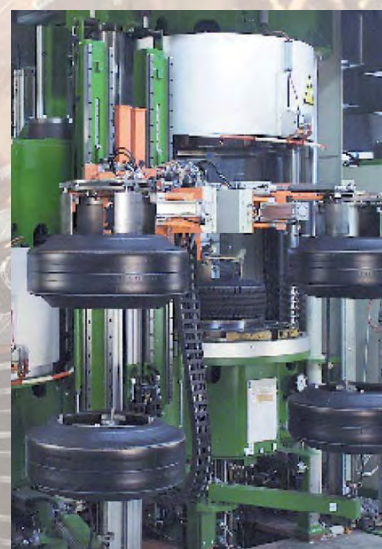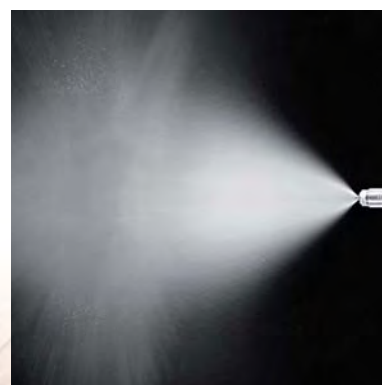

Value Propositions for Lucifer® EPP4 Comfort Proportional Pressure Regulators

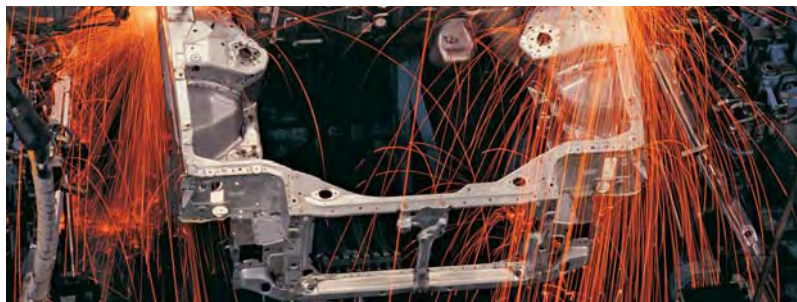

- All parameters fully adjustable through the PC software Calys
- Easy to use software
- Long life expectancy
- Compact and light
- Limited inventory
- Low power
- Flexible remote display positioning
- Proven expertise of Parker, a pioneer in pressure regulation technology



Calys Software

Calys is a unique software in house developed to configure all the parameters of the EPP4 Comfort range.

Calys is an option of the EPP4. It will be sent via email if you order cable reference 496449 which permits the communication between the EPP4 and a PC.

Calys offers many capabilities:

- It enables the distributors to keep a main generic EPP4 reference in stock, and adjust it to the needs of each customer application. They can switch for example from 0-10 V to 4-20 mA, or from 0-7 bar pressure range to 0-5 bar.
- Engineers designing a pneumatic system are able to monitor precisely all the important values (electrical or pneumatical) directly on their laptop.
- After sales technicians are able to receive via email all the parameters measured by the EPP4 installed on a machine wherever its location. This way maintenance operations can be done remotely at distance.



See more detailed technical description of Calys in the "Options" part on page 8.

Lucifer® EPP4 Comfort Technical Data

Fluids:	Lubricated or non lubricated air and neutral gases Recommended filtration: 50 µm
Temperature range:	Ambient: 0 to +50 °C Fluid: 0 to +50 °C
Inlet pressure range:	1 to 12 bar (the inlet pressure must always be at least 1 bar above the regulated pressure)
Outlet pressure range:	0.05 to 10 bar
Hysteresis:	± 50 mbar (factory set up)
Air consumption at constant control signal:	0
Supply voltage:	24 V DC ± 15 % (Max. ripple 1 V)
Power consumption:	Max. 2.8 W with 24 V DC and constant changes of the control signal < 1.5 W without change of control signal
Control signal:	Analog 0 - 10 V; standard for 0 - 10 bar; adjustable Analog 4 - 20 mA; standard for 0 - 10 bar; adjustable
Outlet sensor signal:	Analog 0 - 10 V ; standard for 0 - 10 bar; adjustable Analog 4 - 20 mA ; standard for 0 - 10 bar; adjustable Digital 0/24 V for alarm features: <ul style="list-style-type: none"> ■ Adjustable pressure error (+/-) ■ Adjustable delay ON ■ Adjustable delay OFF ■ Adjustable logic (+/-)
Max. flow:	G1/4: 70 m³/h G1/2: 150 m³/h
Indicative response time:	With a volume of 330 cm³ at the outlet of the regulator
Filling 2 to 4 bar:	G1/4 ~ 50 msec G1/2 ~ 60 msec
Filling 2 to 8 bar:	G1/4 ~ 100 msec G1/2 ~ 120 msec
Emptying 4 to 2 bar:	G1/4 ~ 70 msec G1/2 ~ 90 msec
Emptying 8 to 2 bar:	G1/4 ~ 130 msec G1/2 ~ 190 msec
Safety position:	In case of control signal failure or if it is less than 50mV, the regulated pressure drops automatically to 0 bar (atmospheric pressure). In case of voltage supply failure, the regulated pressure will be kept constant.
Electrical connection:	M12 - 8 pin; male connector power supply/control signal M12 - 5 pin; male connector communication
Life expectancy:	> 50 Mio changes of control signal steps
Mounting position:	Indifferent (recommended position: upright; electronic part on top)
Resistance to vibrations:	30 g in all directions
Protection index:	IP 65
Assembly:	Silicone free
Electromagnetic compatibility:	In accordance with EN 61000-6-1: 2001 EN 61000-6-2: 2001 EN 61000-6-3: 2001 + A11 2004 edition (01/07/07) EN 61000-6-4: 2001
Installation and setting instructions:	See our "Notice 408128, 408134" and appendix supplied with the product.


Note: Parker reserves the right to change specifications without notification.

Description of Operation

Pneumatic Technology

Construction is made with a full aluminium body.

The piston is fabricated in a special polyacetal and is equipped with high performance dynamic seals, specially developed by Parker Lucifer for this application.

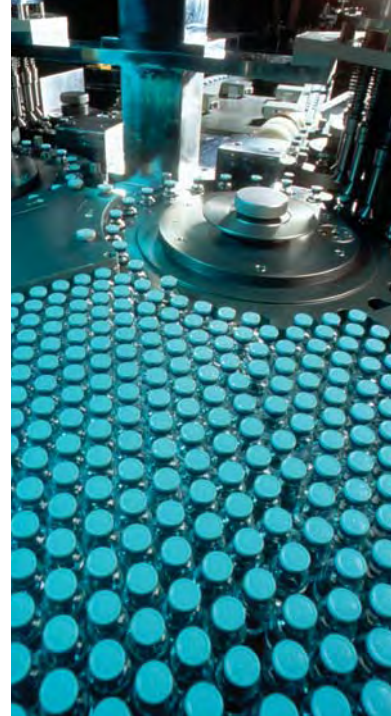

Electronic Technology

The Comfort version uses the board of the EPP4 1/2" Basic range for the regulation functions and a second board for specified options.

Technology used is fully digital. The cancellation of potentiometers allows customers to realise an easy, safe and precise set-up in their production.




Block Diagram

The controller receives both the control signal (set pressure) and the feedback signal from the sensor (outlet pressure).

Any difference between the two amplifier inputs results in a corresponding output which drives the appropriate 2-way pulse width modulated solenoid valve so that the piston moves to correct the pressure.

The same feedback signal from the sensor is used for the output feedback in voltage and current.

The digital signal (alarm) is activated when the conditions (out of pressure or time tolerance) are met.

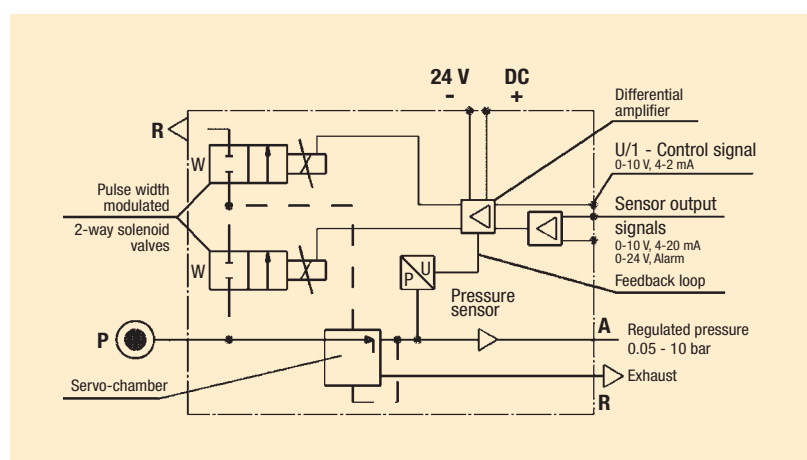

Lucifer® EPP4 Comfort References


Codes	Pipe (bar)	Pressure range		Control signal (see options)	Display
P4CG2001C001	G 1/4	0	10	0-10 V	-
P4CG2001C002	G 1/4	0	10	4-20 mA	-
P4CG2001C005	G 1/4	0	7	0-10 V	-
P4CG2001C006	G 1/4	0	7	4-20 mA	-
P4CG2002C001	G 1/4	0	10	0-10 V	included
P4CG2002C002	G 1/4	0	10	4-20 mA	included
P4CG2002C007	G 1/4	0	7	0-10 V	included
P4CG2002C008	G 1/4	0	7	4-20 mA	included
P4CN2001C001	1/4 NPT	0	10	0-10 V	-
P4CN2001C002	1/4 NPT	0	10	4-20 mA	-
P4CN2002C001	1/4 NPT	0	10	0-10 V	included
P4CN2002C002	1/4 NPT	0	10	4-20 mA	included
P4CG4001C001	G 1/2	0	10	0-10 V	-
P4CG4001C002	G 1/2	0	10	4-20 mA	-
P4CG4001C005	G 1/2	0	7	0-10 V	-
P4CG4001C006	G 1/2	0	7	4-20 mA	-
P4CG4002C001	G 1/2	0	10	0-10 V	included
P4CG4002C002	G 1/2	0	10	4-20 mA	included
P4CG4002C005	G 1/2	0	7	0-10 V	included
P4CG4002C006	G 1/2	0	7	4-20 mA	included
P4CN4001C001	1/2 NPT	0	10	0-10 V	-
P4CN4001C002	1/2 NPT	0	10	4-20 mA	-
P4CN4002C001	1/2 NPT	0	10	0-10 V	included
P4CN4002C002	1/2 NPT	0	10	4-20 mA	included

Other specific settings or specialties (external pressure supply, integrated exhaust of the pilot valves, etc...) are available, please contact us.


Lucifer® EPP4 Comfort

Technical Characteristics


Hysteresis 1/4" & 1/2"

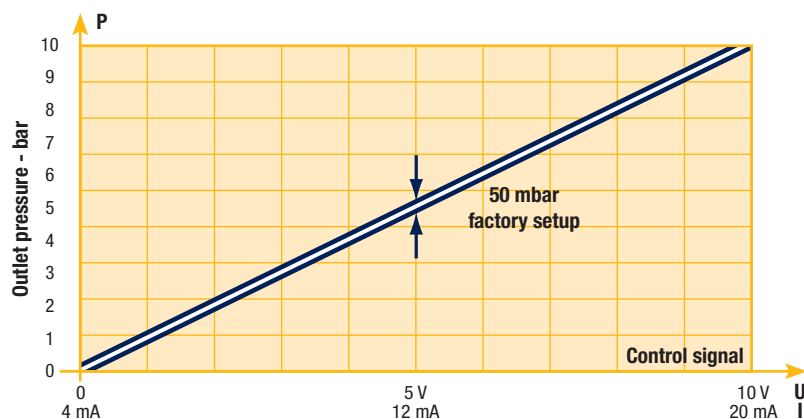

Flow Curve 1/4"

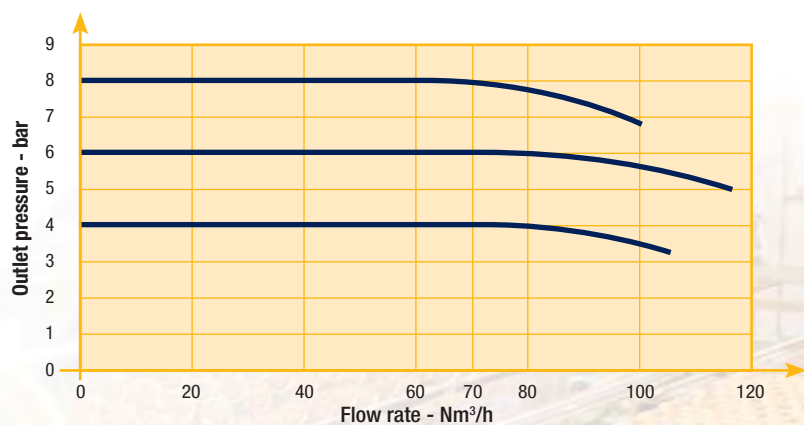

Flow Curve 1/2"

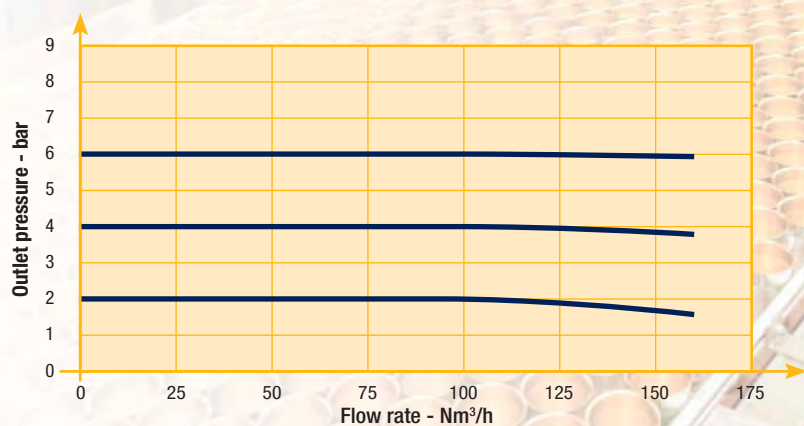


Lucifer® EPP4 Comfort Options

Additional Features

The EPP4 Comfort **offers two main options** - a **remote display** and a **software** to easily set the regulator's parameters.

These are the key feature options for a comfortable use.

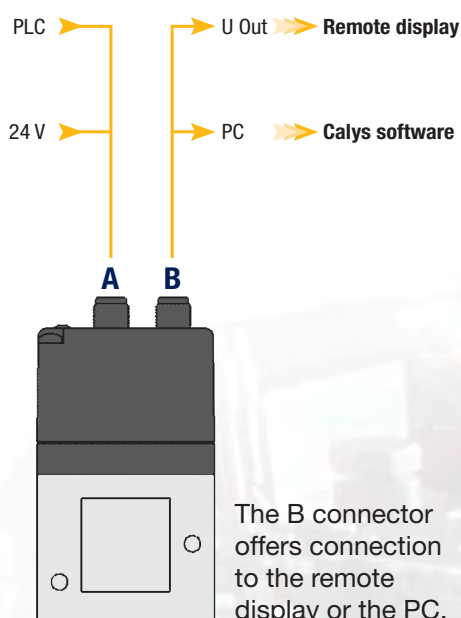

- A remote display connected to the pressure regulator offers flexible monitoring.
- A panel mounting kit is available to install the remote display.
- Calys is an easy-to-use software package designed to allow the user to match his regulators performance directly to his specific application.
- A power supply and control signal cable.



Lucifer® EPP4 Comfort Options

Remote Display

This option includes the Remote Display and 1.5 meter connecting cable.

This device is part of the EPP4 Comfort & Display pack, it is not sold separately.


Order the P4CGX002 series
(vs the P4CGX001 corresponding to the version without a display).

Compact and highly readable remote LED display:

- Bar and PSI scales
- Security lock
- 1.5 m cable
- Mounting brackets



Panel Mounting Kit

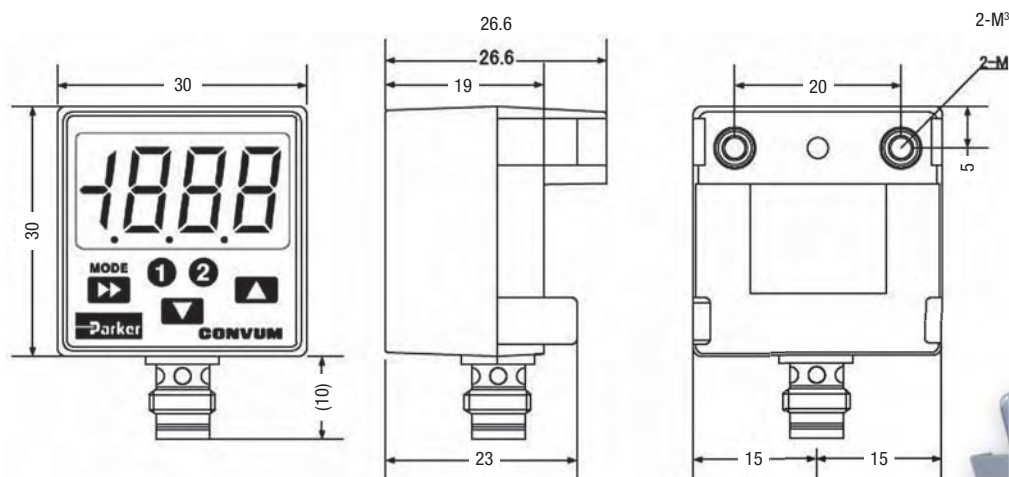

Order the Panel Mounting Kit under reference 496601

Lucifer® EPP4 Comfort Options

Calys Software


Calys is a software to set all relevant parameters of the Lucifer® EPP4 Comfort.

The cable 496449 (option) is needed to let the EPP4 communicate with any configured PC, this software is supplied free of charge with each cable unit.



Calys offers the following features:

- Live monitoring (control signal, regulated pressure, supply voltage,...)
- Recording of the main parameters (control signal, regulated pressure, supply voltage,...) in an Excel file
- Free calibration for the inputs and outputs
- Adjustable alarm (positive-negative, pressure limits, delays)
- Configuration files easy to duplicate
- Complete and interactive help file
- Data in 4 different pressure units
- Menus in 4 languages (English, German, French and Italian)
- Cable 496449 with RS-232 and USB connection

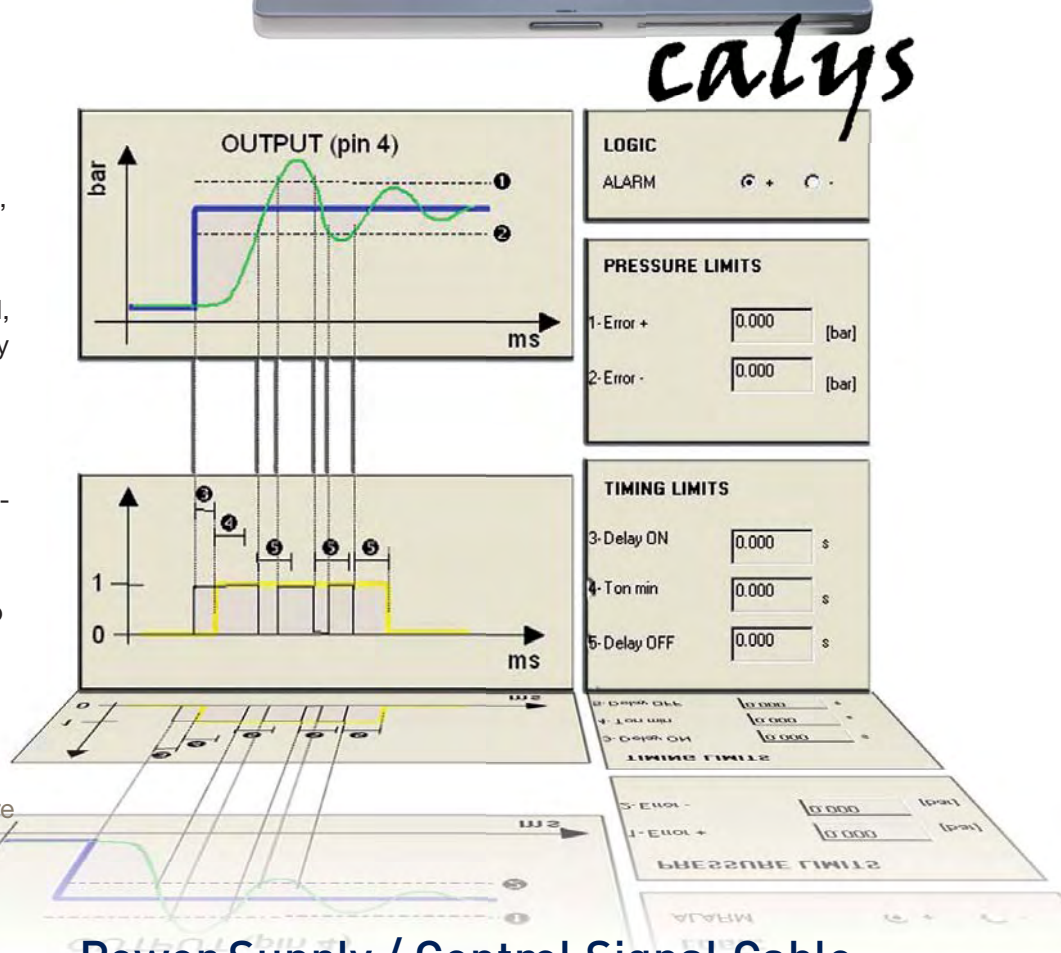

Power Supply / Control Signal Cable


- 2 m cable with moulded M12-8 pins connector

**Order the PC software
(including cable) under
reference 496449**

**Order the power supply /
control signal cable under
reference 496796**


Lucifer® EPP4 Comfort Range 1/4"

Dimensions

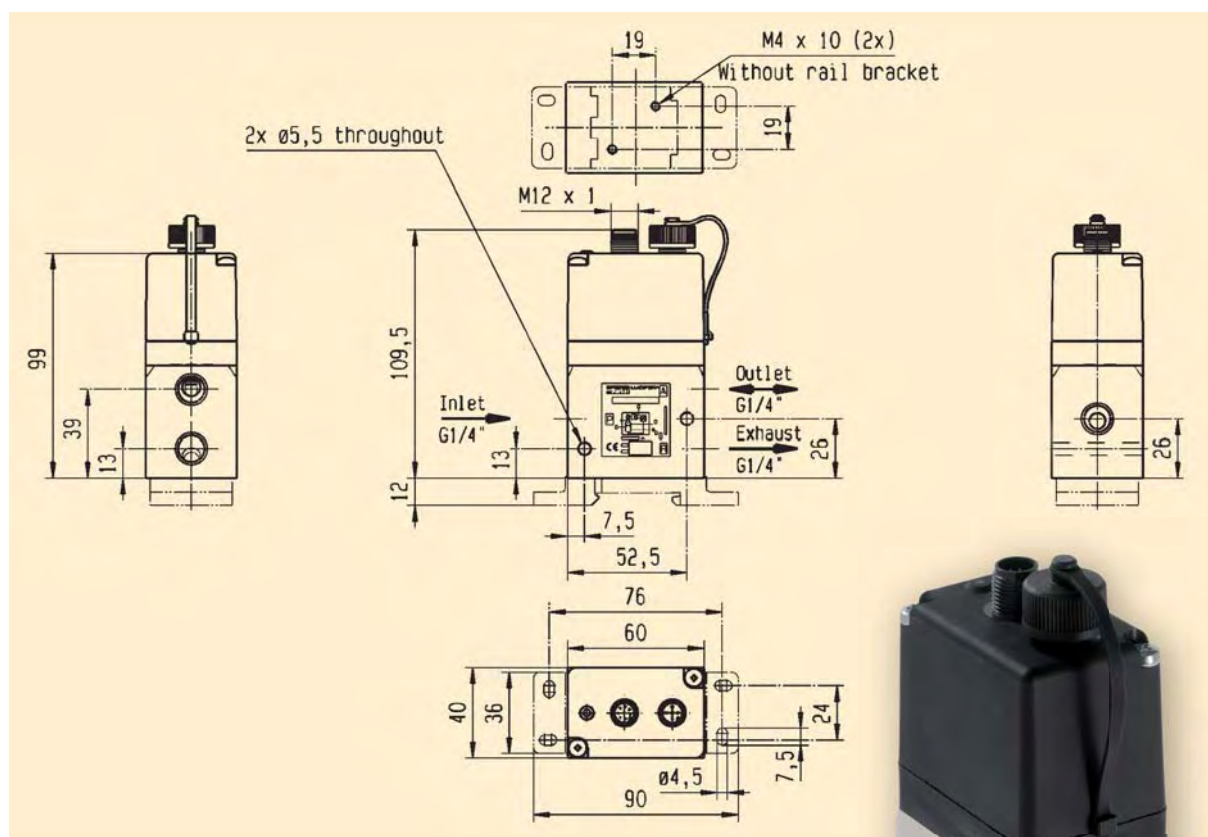



Accessories

Mounting bracket
(supplied as a standard
with each Lucifer® EPP4 1/4")

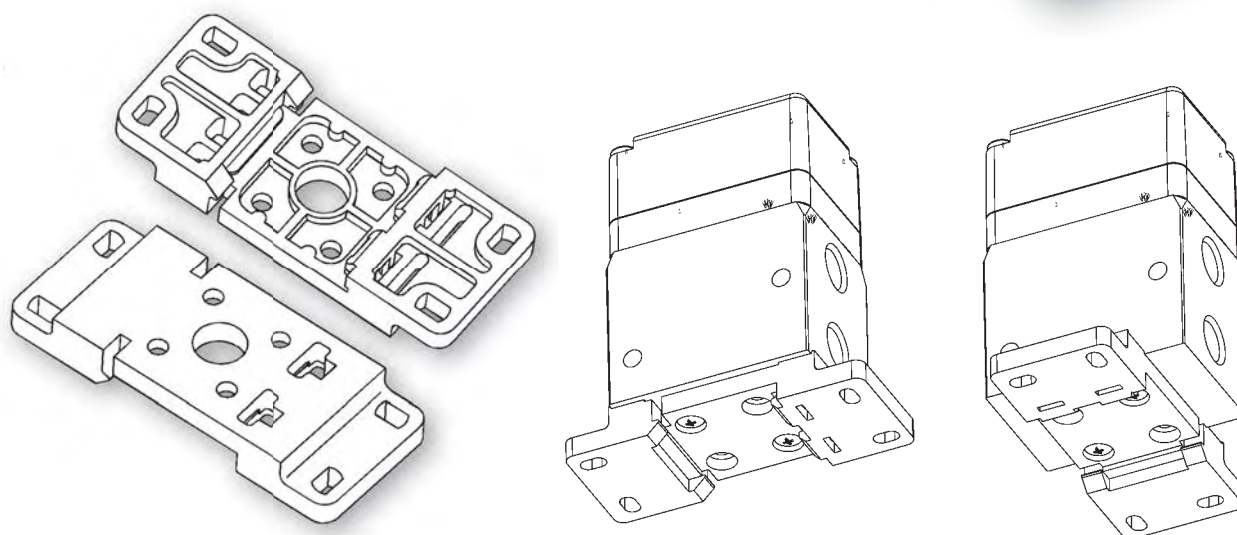


Lucifer® EPP4 Comfort Range 1/2"

Dimensions

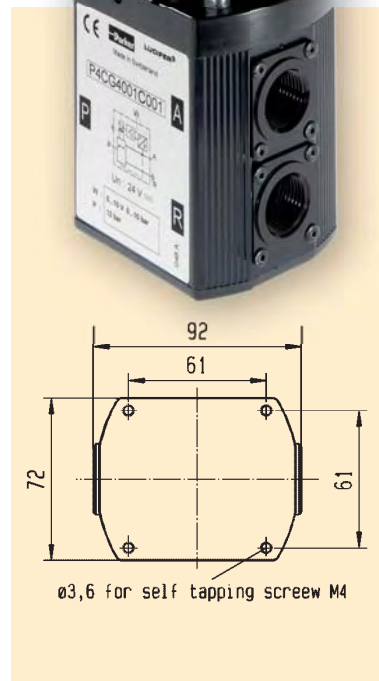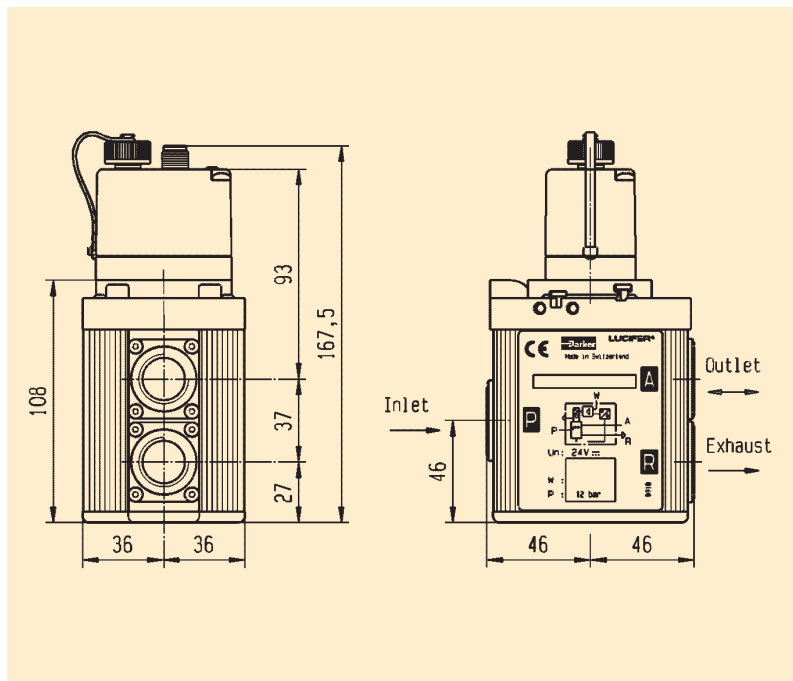

Accessories

Mounting brackets to be ordered separately

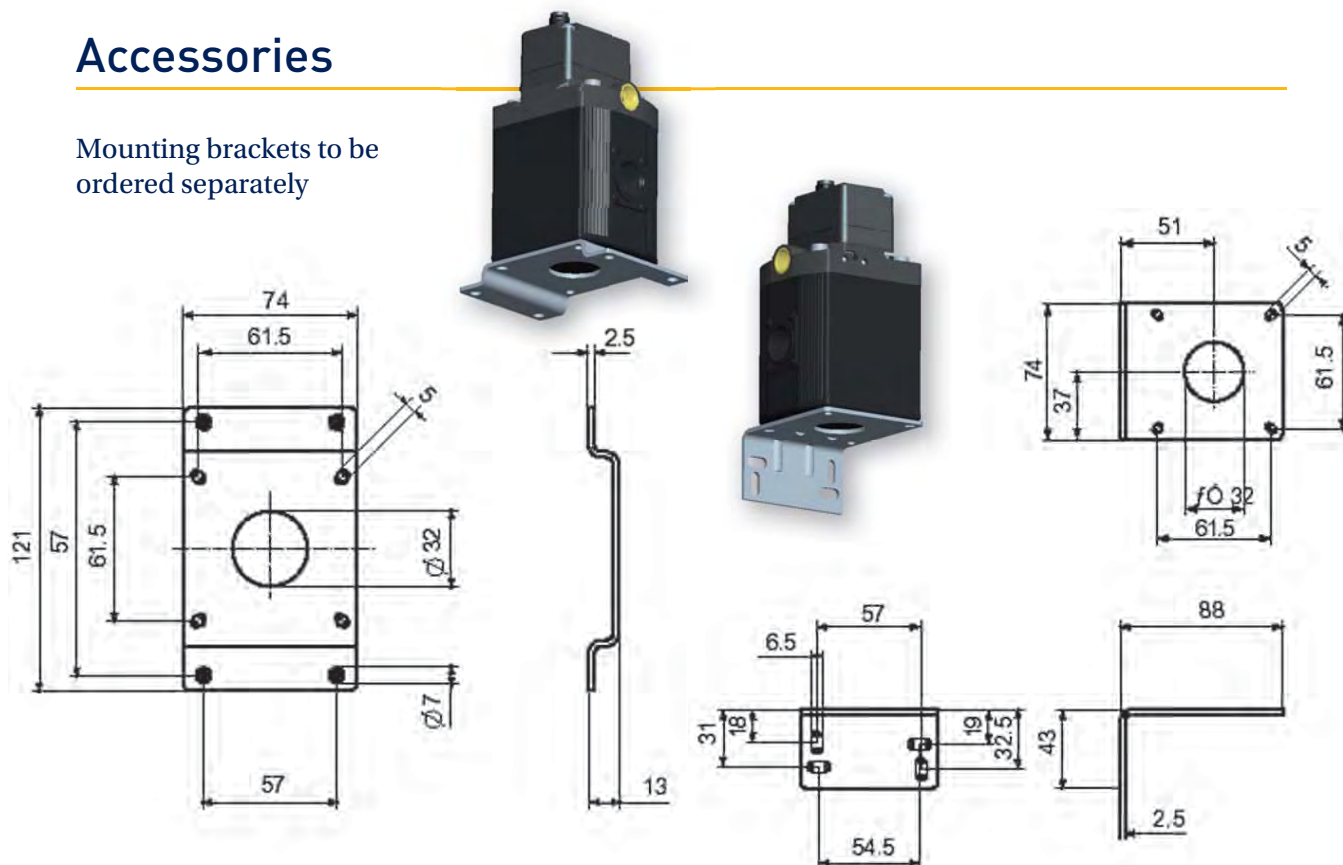

Order reference 491366

Order reference 491367

This image shows a single sheet of white paper with horizontal ruling lines. The lines are evenly spaced and run across the width of the page. There is a small yellow tab at the top left corner. The paper appears to be part of a notebook or binder.

[illegible]

- This document and other information from Parker-Hannifin Corporation, its subsidiaries and authorized distributors provide product or system options for further investigation by users having technical expertise.
- The user, through its own analysis and testing, is solely responsible for making the final selection of the system and components and assuring that all performance, endurance, maintenance, safety and warning requirements of the application are met. The user must analyze all aspects of the application, follow applicable industry standards, and follow the information concerning the product in the current product catalog and in any other materials provided from Parker or its subsidiaries or authorized distributors.
- To the extent that Parker or its subsidiaries or authorized distributors provide component or system options based upon data or specifications provided by the user, the user is responsible for determining that such data and specifications are suitable and sufficient for all applications and reasonably foreseeable uses of the components or systems.

Parker's Motion & Control Technologies

At Parker, we're guided by a relentless drive to help our customers become more productive and achieve higher levels of profitability by engineering the best systems for their requirements. It means looking at customer applications from many angles to find new ways to create value. Whatever the motion and control technology need, Parker has the experience, breadth of product and global reach to consistently deliver. No company knows more about motion and control technology than Parker. For further info call 00800 27 27 5374.



AEROSPACE

Key Markets

- Aircraft engines
- Business & general aviation
- Commercial transports
- Land-based weapons systems
- Military aircraft
- Missiles & launch vehicles
- Regional transports
- Unmanned aerial vehicles

Key Products

- Flight control systems & components
- Fluid conveyance systems
- Fluid metering delivery & atomization devices
- Fuel systems & components
- Hydraulic systems & components
- Inert nitrogen generating systems
- Pneumatic systems & components
- Wheels & brakes



CLIMATE CONTROL

Key Markets

- Agriculture
- Air conditioning
- Food, beverage & dairy
- Life sciences & medical
- Precision cooling
- Processing
- Transportation

Key Products

- CO₂ controls
- Electronic controllers
- Filter driers
- Hand shut-off valves
- Hose & fittings
- Pressure regulating valves
- Refrigerant distributors
- Safety relief valves
- Solenoid valves
- Thermostatic expansion valves



ELECTROMECHANICAL

Key Markets

- Aerospace
- Factory automation
- Food & beverage
- Life science & medical
- Machine tools
- Packaging machinery
- Paper machinery
- Plastics machinery & converting
- Primary metals
- Semiconductor & electronics
- Textile
- Wire & cable

Key Products

- AC/DC drives & systems
- Electric actuators
- Controllers
- Gantry robots
- Gearheads
- Human machine interfaces
- Industrial PCs
- Inverters
- Linear motors, slides and stages
- Precision stages
- Stepper motors
- Servo motors, drives & controls
- Structural extrusions



FILTRATION

Key Markets

- Food & beverage
- Industrial machinery
- Life sciences
- Marine
- Mobile equipment
- Oil & gas
- Power generation
- Process
- Transportation

Key Products

- Analytical gas generators
- Compressed air & gas filters
- Condition monitoring
- Engine air, fuel & oil filtration & systems
- Hydraulic, lubrication & coolant filters
- Process, chemical, water & microfiltration filters
- Nitrogen, hydrogen & zero air generators



FLUID & GAS HANDLING

Key Markets

- Aerospace
- Agriculture
- Bulk chemical handling
- Construction machinery
- Food & beverage
- Fuel & gas delivery
- Industrial machinery
- Mobile
- Oil & gas
- Transportation
- Welding

Key Products

- Brass fittings & valves
- Diagnostic equipment
- Fluid conveyance systems
- Industrial hose
- PTFE & PFA hose, tubing & plastic fittings
- Rubber & thermoplastic hose & couplings
- Tube fittings & adapters
- Quick disconnects



HYDRAULICS

Key Markets

- Aerospace
- Aerial lift
- Agriculture
- Construction machinery
- Forestry
- Industrial machinery
- Mining
- Oil & gas
- Power generation & energy
- Truck hydraulics

Key Products

- Diagnostic equipment
- Hydraulic cylinders
- Hydraulic motors & pumps
- Hydraulic systems
- Hydraulic valves & controls
- Power take-offs
- Rubber & thermoplastic hose & couplings
- Tube fittings & adapters
- Quick disconnects



PNEUMATICS

Key Markets

- Aerospace
- Conveyor & material handling
- Factory automation
- Food & beverage
- Life science & medical
- Machine tools
- Packaging machinery
- Transportation & automotive

Key Products

- Air preparation
- Compact cylinders
- Field bus valve systems
- Grippers
- Guided cylinders
- Manifolds
- Miniature fluidics
- Pneumatic accessories
- Pneumatic actuators & grippers
- Pneumatic valves and controls
- Rodless cylinders
- Rotary actuators
- Tie rod cylinders
- Vacuum generators, cups & sensors



PROCESS CONTROL

Key Markets

- Chemical & refining
- Food, beverage & dairy
- Medical & dental
- Microelectronics
- Oil & gas
- Power generation

Key Products

- Analytical sample conditioning products & systems
- Fluoropolymer chemical delivery fittings, valves & pumps
- High purity gas delivery fittings, valves & regulators
- Instrumentation fittings, valves & regulators
- Medium pressure fittings & valves
- Process control manifolds



SEALING & SHIELDING

Key Markets

- Aerospace
- Chemical processing
- Consumer
- Energy, oil & gas
- Fluid power
- General industrial
- Information technology
- Life sciences
- Military
- Semiconductor
- Telecommunications
- Transportation

Key Products

- Dynamic seals
- Elastomeric o-rings
- ENI shielding
- Extruded & precision-cut, fabricated elastomeric seals
- Homogeneous & inserted elastomeric shapes
- High temperature metal seals
- Metal & plastic retained composite seals
- Thermal management



ENGINEERING YOUR SUCCESS.

Parker Worldwide

AE - UAE, Dubai
Tel: +971 4 8127100
parker.me@parker.com

AR - Argentina, Buenos Aires
Tel: +54 3327 44 4129

AT - Austria, Wiener Neustadt
Tel: +43 (0)2622 23501-0
parker.austria@parker.com

AT - Eastern Europe, Wiener Neustadt
Tel: +43 (0)2622 23501 900
parker.easteurope@parker.com

AU - Australia, Castle Hill
Tel: +61 (0)2-9634 7777

AZ - Azerbaijan, Baku
Tel: +994 50 2233 458
parker.azerbaijan@parker.com

BE/LU - Belgium, Nivelles
Tel: +32 (0)67 280 900
parker.belgium@parker.com

BR - Brazil, Cachoeirinha RS
Tel: +55 51 3470 9144

BY - Belarus, Minsk
Tel: +375 17 209 9399
parker.belarus@parker.com

CA - Canada, Milton, Ontario
Tel: +1 905 693 3000

CH - Switzerland, Etoy
Tel: +41 (0) 21 821 02 30
parker.switzerland@parker.com

CL - Chile, Santiago
Tel: +56 2 623 1216

CN - China, Shanghai
Tel: +86 21 2899 5000

CZ - Czech Republic, Klecany
Tel: +420 284 083 111
parker.czechrepublic@parker.com

DE - Germany, Kaarst
Tel: +49 (0)2131 4016 0
parker.germany@parker.com

DK - Denmark, Ballerup
Tel: +45 43 56 04 00
parker.denmark@parker.com

ES - Spain, Madrid
Tel: +34 902 330 001
parker.spain@parker.com

FI - Finland, Vantaa
Tel: +358 (0)20 753 2500
parker.finland@parker.com

FR - France, Contamine s/Arve
Tel: +33 (0)4 50 25 80 25
parker.france@parker.com

GR - Greece, Athens
Tel: +30 210 933 6450
parker.greece@parker.com

HK - Hong Kong
Tel: +852 2428 8008

HU - Hungary, Budapest
Tel: +36 1 220 4155
parker.hungary@parker.com

IE - Ireland, Dublin
Tel: +353 (0)1 466 6370
parker.ireland@parker.com

IN - India, Mumbai
Tel: +91 22 6513 7081-85

IT - Italy, Corsico (MI)
Tel: +39 02 45 19 21
parker.italy@parker.com

JP - Japan, Tokyo
Tel: +(81) 3 6408 3901

KR - South Korea, Seoul
Tel: +82 2 559 0400

KZ - Kazakhstan, Almaty
Tel: +7 7272 505 800
parker.easteurope@parker.com

LV - Latvia, Riga
Tel: +371 6 745 2601
parker.latvia@parker.com

MX - Mexico, Apodaca
Tel: +52 81 8156 6000

MY - Malaysia, Shah Alam
Tel: +60 3 7849 0800

NL - The Netherlands, Oldenzaal
Tel: +31 (0)541 585 000
parker.nl@parker.com

NO - Norway, Ski
Tel: +47 64 91 10 00
parker.norway@parker.com

NZ - New Zealand, Mt Wellington
Tel: +64 9 574 1744

PL - Poland, Warsaw
Tel: +48 (0)22 573 24 00
parker.poland@parker.com

PT - Portugal, Leca da Palmeira
Tel: +351 22 999 7360
parker.portugal@parker.com

RO - Romania, Bucharest
Tel: +40 21 252 1382
parker.romania@parker.com

RU - Russia, Moscow
Tel: +7 495 645-2156
parker.russia@parker.com

SE - Sweden, Spånga
Tel: +46 (0)8 59 79 50 00
parker.sweden@parker.com

SG - Singapore
Tel: +65 6887 6300

SK - Slovakia, Banská Bystrica
Tel: +421 484 162 252
parker.slovakia@parker.com

SL - Slovenia, Novo Mesto
Tel: +386 7 337 6650
parker.slovenia@parker.com

TH - Thailand, Bangkok
Tel: +662 717 8140

TR - Turkey, Istanbul
Tel: +90 216 4997081
parker.turkey@parker.com

TW - Taiwan, Taipei
Tel: +886 2 2298 8987

UA - Ukraine, Kiev
Tel: +380 44 494 2731
parker.ukraine@parker.com

UK - United Kingdom, Warwick
Tel: +44 (0)1926 317 878
parker.uk@parker.com

US - USA, Cleveland
Tel: +1 216 896 3000

VE - Venezuela, Caracas
Tel: +58 212 238 5422

ZA - South Africa, Kempton Park
Tel: +27 (0)11 961 0700
parker.southafrica@parker.com

European Product Information Centre
Free phone: 00 800 27 27 5374
(from AT, BE, CH, CZ, DE, DK, EE, ES, FI,
FR, IE, IL, IS, IT, LU, MT, NL, NO, PL, PT, RU,
SE, UK, ZA)

