



aerospace
 climate control
 electromechanical
 filtration
 fluid & gas handling
hydraulics
 pneumatics
 process control
 sealing & shielding



Electronic Control Systems IQAN System Products

Catalog HY33-1825/US
 North American Product Offering



ENGINEERING YOUR SUCCESS.



WARNING - USER RESPONSIBILITY

FAILURE OR IMPROPER SELECTION OR IMPROPER USE OF THE PRODUCTS DESCRIBED HEREIN OR RELATED ITEMS CAN CAUSE DEATH, PERSONAL INJURY AND PROPERTY DAMAGE.

- This document and other information from Parker-Hannifin Corporation, its subsidiaries and authorized distributors provide product or system options for further investigation by users having technical expertise.
- The user, through its own analysis and testing, is solely responsible for making the final selection of the system and components and assuring that all performance, endurance, maintenance, safety and warning requirements of the application are met. The user must analyze all aspects of the application, follow applicable industry standards, and follow the information concerning the product in the current product catalog and in any other materials provided from Parker or its subsidiaries or authorized distributors.
- To the extent that Parker or its subsidiaries or authorized distributors provide component or system options based upon data or specifications provided by the user, the user is responsible for determining that such data and specifications are suitable and sufficient for all applications and reasonably foreseeable uses of the components or systems.

OFFER OF SALE

The items described in this document are hereby offered for sale by Parker-Hannifin Corporation, its subsidiaries or its authorized distributors. This offer and its acceptance are governed by the provisions stated in the detailed "Offer of Sale" elsewhere in this document or available at www.parker.com.

SAFETY

For safety information, see Safety Guide at www.parker.com/safety or call 1-800-CParker.

Software platforms

| | |
|----------------------------|---|
| IQAN Studios | 1 |
| IQANdevelop software | 2 |

Master units, IQANdesign platform

| | |
|---------------|---|
| IQAN-MD4..... | 3 |
| IQAN-MD3..... | 4 |
| IQAN-MC2..... | 5 |
| IQAN-MC3..... | 6 |

Expansion units, IQANdesign platform

| | |
|-----------------|----|
| IQAN-XC10 | 7 |
| IQAN-XA2 | 8 |
| IQAN-XS2 | 9 |
| IQAN-XC21 | 10 |

Expansion units, IQANdesign or IQANdevelop

| | |
|---------------------------------|----|
| IQAN-XT2..... | 11 |
| IQAN-LC5-C01/C02 | 12 |
| MP handle for IQAN-LC5-C0x..... | 13 |

Master unit, IQANdevelop platform

| | |
|---------------|----|
| IQAN-MDM..... | 14 |
|---------------|----|

Expansion unit, IQANdevelop platform

| | |
|----------------|----|
| IQAN-XP2 | 15 |
|----------------|----|

Task oriented controller, IQANdevelop platform

| | |
|----------------|----|
| IQAN-TOC8..... | 16 |
|----------------|----|

Accessories

| | |
|---|----|
| IQAN communication and prototyping cables | 17 |
| IQAN connector kits and address tags..... | 18 |
| IQAN-LF1 footpedal and IQAN diagnostic gateways | 18 |

Terms of sale with Warranty Limitations

| | |
|--------------------|----|
| Offer of sale..... | 19 |
|--------------------|----|

**Contents**

When ordering IQAN Studios, the following items are included:

- IQAN Studio software CD-ROM
- 1 licence

The user's manual for IQANdesign is provided in electronic format and may be downloaded from our website, www.iqan.com. For a printed manual, contact Parker Catalog Services.

Communication cables are not included. Order the cables you need from the accessories section.

Requirements

| | |
|-----------------|--|
| CPU | PC compatible, Pentium® II 233 MHz or better |
| RAM | minimum 256 Mbyte (512 Mbyte recommended) |
| HD | 100 Mbyte storage space available |
| Ports | serial port, RS232 or USB port |
| Display | XVGA (1280x1024 recommended) |
| Software | Windows® 2000, XP, Vista, 7 |

Upgrade

It is always possible to download the latest version from our web site www.iqan.com.

Application

The IQAN software studios cover all phases of a machine's life cycle, from development through production to after sales. There are three different studios available; IQAN Creative Studio, IQAN Productive Studio and IQAN Active Studio.

IQAN Creative studio

IQAN Creative studio is a user-programmable software package for the R&D department. It includes tools for application development, simulation and initial setup.

- IQANdesign
- IQANsimulate
- IQANrun
- IQANanalyze

IQAN Productive studio

IQAN Productive studio is a software package for the manufacturing and service departments. It includes development tools for customization and automation of production and maintenance processes.

- IQANscript
- IQANcustomize
- IQANsimulate
- IQANrun

IQAN Active studio

IQAN Active studio is a software package for service and production personnel. It includes tools for machine diagnostics, setup and simulation.

- IQANrun
- IQANsimulate


IQAN Studios are used with the newest IQAN products including the IQAN-MD3 and IQAN-MDL2 master/display units and also with the IQAN-MC2 and IQAN-MC3 controllers.

Description

IQAN Creative Studio
 IQAN Productive Studio
 IQAN Active Studio

Ordering PN

20073643
 20073644
 20073642

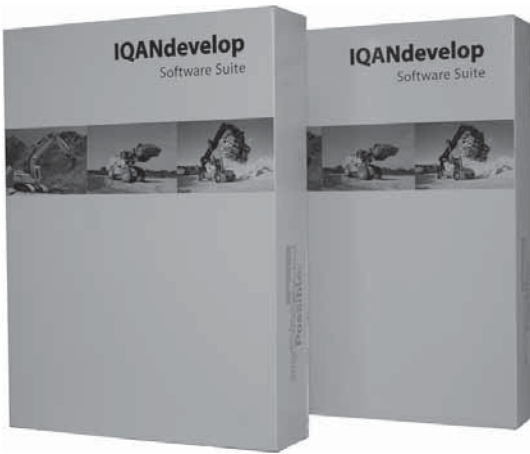

Contents

When ordering IQANdevelop, the following items are included:

- IQANdevelop software CD-ROM
- 1 licence
- 1 serial cable
- 1 simulation cable (PRO version only)

The user's manual for IQANdevelop is available in electronic format and may be downloaded from our website, www.iqan.com.

Requirements

| | |
|-----------------|---|
| CPU | PC compatible, Pentium® II 233 MHz or better |
| RAM | minimum 256 Mbyte (512 Mbyte recommended) |
| HD | 100 Mbyte storage space available |
| Ports | serial port, RS232 or USB port |
| Display | XVGA (1280x1024 recommended) |
| Software | Windows® 2000, XP (Windows® XP is recommended) |

Upgrade

It is always possible to download the latest version from our web site www.iqan.com.

Application

IQANdevelop is a legacy software tool for adding modules and channels to the IQAN control system in order to build functions for the developer's mobile machine application.

The software is based on the different modules' block diagrams. To add a new module, you create a new block diagram. From the block diagram it is easy to set/edit channel parameters and measure the IQAN system.

With the navigator function in IQANdevelop you get an overview of the connected channels in a specific function. In this way it is easy to see how the channels interact with each other.

IQANdevelop is also a tool for measuring and troubleshooting IQAN systems. With a logging function, measurements can be viewed graphically. IQANdevelop PRO also includes IQANsimulate, for performing a virtual test of your application before installing it on the machine. IQANsimulate requires a National Instruments CAN communication card in order to operate.

IQANdevelop Change is a service tool which simplifies setup during production or after-sales service for your IQAN controlled mobile machine. Features that have been set as adjustable are easily accessed with the Change software by production employees and service personnel to fine tune and troubleshoot your machine's operation.

IQANdevelop software is used with the legacy IQAN-MDM master/display and IQAN-TOC8 controller, and also with the IQAN-TOC2 valve driver module.

Description

IQANdevelop PRO
IQANdevelop Change

Ordering PN

20005607
20005606

**General**

| | |
|----------------------------|---------------------------------|
| Weight (MD4-7) | 0.93 kg |
| Weight (MD4-5) | 0.67 kg |
| Operating temperature | -30 °C to 70 °C |
| Storage temperature | -40 °C to 85 °C |
| Protection | IP65 |
| Voltage supply | 9-32 Vdc |
| Current consumption (idle) | 300 mA (28Vdc) 600 mA(14Vdc) |
| CE marking | 2004/108/EC |

Performance

| | |
|----------------|-----------------------------------|
| Processor | ARM Cortex-A8, (800 MHz) |
| Memory | 2 Gbyte Flash, 256 Mbyte SDRAM |
| Logging | 64 Mb |
| Cycle time | 25 to 100 ms |
| Software tools | IQANdesign platform |

Communication interface

| | |
|---------------------|-------------------------|
| CAN (ISO 11898) | 4 (2) ² |
| Protocols | ICP, SAE J1939, generic |
| Ethernet 100Base-Tx | 2 (1) ^{1,2} |

Display

| | |
|----------------------|----------------------|
| Touch Interface | PCAP ² |
| 7" (18 cm) display | 16:9, 800x480 pixels |
| 5.7" (14 cm) display | 4:3, 640x480 pixels |
| Backlight | LED |

Connection

| | |
|-----------------------|------------------------|
| Electrical connection | 2x Deutsch DTM, 12 pos |
| Ethernet | 2 x M12, D-code, 4 pos |

Outputs

| | |
|-----------------------|----------------|
| Digital outputs | 4 ³ |
| Type | Low side |
| Max load, 1 output | 300 mA |
| Max load, all outputs | 850 mA |

Inputs

| | |
|----------------|--------------------------|
| Voltage inputs | 2 ³ |
| Signal range | 0 - 5 Vdc, 12 bit |
| Digital inputs | 10 ³ |
| Encoder input | 1 ³ |
| Signal range | 0 - 500 Hz, 50/50 signal |

- 1) Ethernet port A dedicated for PC diagnostics.
- 2) Depending on configuration.
- 3) The outputs and inputs share the same physical pins. The user defines the channels/pins with IQANdesign.

Application

The IQAN-MD4 is a family of master display units, fully compliant with the IQANdesign platform system. The units have full graphical, diagnostic and CAN gateway capability and are used together with the easy to use IQAN programming tools.

IQAN-MD4-7 comes with a 7" (18 cm) display with touch screen, and the IQAN-MD4-5 has a 5.7" (14 cm) display with optional touchscreen. The IQAN-MD4 has a rugged mechanical design with no moving parts, and is completely sealed. The use of optical bonded display glass improves the readability, avoids light refraction and also eliminates possible condensation.

The display units have a pleasing, aesthetic design that blends with modern cabins. A touchscreen interface is offered for interactive, intuitive HMI (code T1). The IQAN-MD4 also has IP-camera support (code E2). There is no need for separate camera monitors. Virtually an unlimited number of cameras can be connected if an IP switch is used.


Mounting is easy, with steel clips for a well integrated, flush mount in cabin panels, or the back of the unit has an optional stand-alone bracket compatible with RAM™ mount components. The MD4 may be mounted in landscape or portrait orientation for easy integration of HMI or mechanics.

Description

| |
|-----------------|
| IQAN-MD4-7-T1E2 |
| IQAN-MD4-5-T0E1 |
| IQAN-MD4-5-T1E2 |

Ordering PN

| |
|----------|
| 20077771 |
| 20077772 |
| 20077773 |

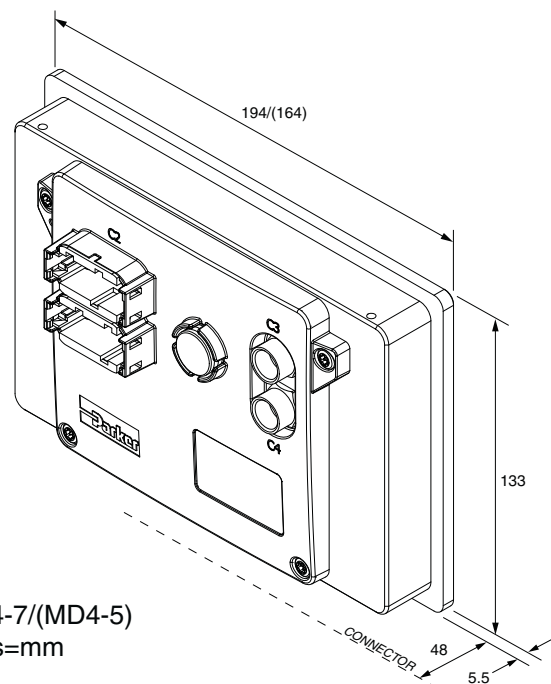

**General**

| | |
|----------------------------|--------------------------------------|
| Weight | 0.3 Kg |
| Operating temperature | -30 to +60 °C -25>LCD off >+75 °C |
| Protection | outdoor use |
| Voltage supply | 11- 32 Vdc |
| Current consumption (idle) | 130 mA (28 Vdc) 190 mA (14 Vdc) |

Performance

| | |
|----------------|-------------------|
| Processor | 32-bit (144 MHz) |
| Logging | 80K records |
| Sample time | min 10ms |
| Software tools | IQANdesign family |

Communication interfaces

| | |
|------------------------------|--|
| CAN (ISO 11898) Protocols | 2 ICP, SAE J1939, CANopen, etc |
| RS-232 Protocols | 1 AT-Hayes,GSM07.07, GSM07.05, IDP |
| USB 2.0 (full speed) | 1 |

Outputs

| | |
|----------------|------------------|
| Digital output | 1 |
| Type | high side switch |
| Max load | 200 mA |

Inputs

| | |
|----------------|------------------|
| Voltage inputs | 7 |
| Signal range | 0 - 5 Vdc |
| Resolution | 1.2 mV |
| Digital inputs | (7) ¹ |
| Signal high | 4 Vdc |
| Signal low | 1 Vdc |

1) The voltage and digital inputs share the same physical pins. The user defines the channels/pins with IQANdesign.

Application

The IQAN-MD3 is a master/display unit that works with a variety of expansion modules in the IQANdesign platform control system. The MD3 is fully programmable for use in any machine application, as a graphical user interface and as a CAN gateway.

The IQAN-MD3 is constructed to be weatherproof for outdoor use. The MD3 will display vehicle data and system information.

The IQAN-MD3 has a 3.5" transfective TFT color display. There are five navigation buttons and four 'soft' function buttons to make interaction with the control simple for the operator.

The unit is designed to be easily mounted in a vehicle dashboard or exterior control panel. The unit has two sealed and keyed Deutsch DTM 12 position connectors.

For time critical functions the MD3's sample rate can be set as low as 10 ms. The unit has a large internal memory for events and logging that is capable of storing 80,000 records.

The MD3 analog inputs accept 0-5V signals from input devices or sensors. These inputs can also be set up as on-off inputs. A digital output is available and may be used for alarm or alert signals.


The MD3 is connected to other units by two CAN busses. All CAN busses may be configured as ICP (IQAN CAN Protocol), SAE J1939 or Generic CAN. The unit supports RS232 for modem (remote diagnostic) connection and USB for communication with a PC.

Description

IQAN-MD3

Ordering PN

20072409

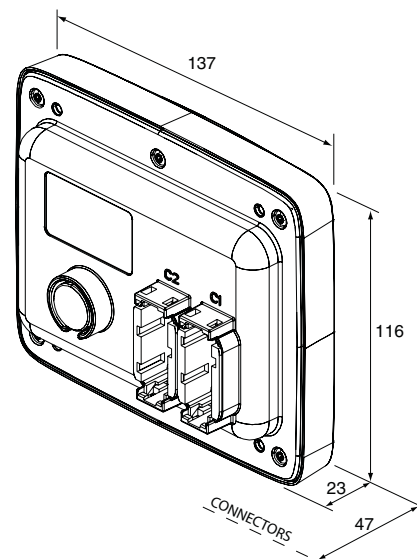

units=mm

**General**

| | |
|----------------------------|---|
| Weight | 0.7 Kg |
| Temperature range | -30 to +70 °C |
| Protection | outdoor use |
| Voltage supply | 11- 32 VDC |
| Current consumption (idle) | 160 mA (28 VDC) 200 mA (14 VDC) |
| Data interface | |
| Type | Parker ICP (IQAN CAN Protocol) J1939, Generic CAN |
| Communication port | |
| Type | USB 1.1 |

Outputs

| | |
|--------------------------|-----------------------------|
| Proportional outputs | 8 double (max) ¹ |
| Type current mode | current - closed-loop |
| PWM mode | voltage - open-loop |
| Signal range | 100 - 2000 mA |
| Dither frequency | 25 - 333 Hz |
| Resolution | 0.1 mA |
| Digital outputs | 24 (max) ¹ |
| Type | high side switch |
| Total load (all outputs) | 16 A |

Inputs

| | |
|---------------------------|--------------------------|
| Voltage inputs | 13 (max) ¹ |
| Signal range | 0 - 5 VDC |
| Resolution | 1.2 mV |
| Frequency inputs | 5 (max) ¹ |
| Signal range (speed mode) | 2 - 20000 Hz |
| (position mode) | 0 - 20000 Hz |
| Digital inputs | 13 (max) ¹ |
| Signal high | 4 VDC - V _{BAT} |
| Signal low | 0 - 1 VDC |

1) The flexible inputs and outputs share the same physical pins. The user defines the channels/pins with IQANdesign.

Application

The IQAN-MC2 is a flexible master unit that works with a variety of expansion modules in the IQANdesign platform control system. This unit is suitable for use as either a Bus master or standalone control. The IQAN-MC2 has new I/O flexibility that allows the user greater freedom in defining signals for both measurement and control.

The different input types are voltage, on/off, pulse and frequency. The outputs are proportional and on/off. The unit also has two CAN interfaces for bus communication using IQAN CAN Protocol (ICP) and SAE J1939 or Generic CAN.

The MC2 is equipped with a Real Time Clock and can perform data logging functions.

The IQAN-MC2 can control proportional valves using current mode (current closed-loop) or PWM mode (voltage open-loop) signals. The analog inputs will accept 0-5V signals from input devices or sensors. The inputs can also be configured for 5 frequency inputs. Some outputs may alternatively be used as voltage inputs or digital inputs for switches. For communication and diagnostics the MC2 has a USB interface.

The aluminum housing is designed to be rugged, but light and has a sealed, automotive AMP/Tyco power timer connector. The IQAN-MC2 has a membrane to prevent condensation inside the housing. Additional protection allows the unit to be steam-cleaned. This controller is designed for the outdoor environment.


Diagnostics: If an error is detected an LED on the top of the controller flashes a sequence to indicate the nature of the error.

Description

IQAN-MC2

Ordering PN

20070899

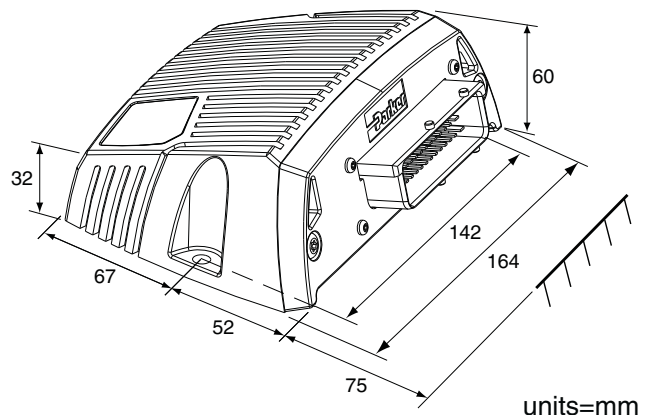

units=mm

**General**

| | |
|----------------------------|---|
| Weight | 1.1 kg |
| Temperature range | |
| Operating, ambient | -40 to +85 °C |
| Storage, ambient | -40 to +100 °C |
| Protection | outdoor, chassis |
| Voltage supply | 9 - 32 Vdc |
| Current consumption (idle) | 160 mA (24V) 240 mA (12V) |
| CAN buses | 4 ¹ |
| Protocols | Parker ICP (IQAN CAN Protocol) SAE J1939, Generic CAN |

1) It is recommended that one CAN bus is dedicated for diagnostic purposes (PC interface)

Safety

| | |
|----------------|--------------------|
| IEC 61508 | Up to SIL2 |
| EN ISO 13849-1 | Up to PLd |
| PFHd | < 10 ⁻⁷ |

Outputs

| | |
|---------------------------|----------------------|
| Proportional outputs | |
| Current output pairs | 4 |
| Type | current closed loop |
| Signal range | 100-2000 mA |
| Dither frequency | 70-333 Hz |
| Digital outputs | |
| Dedicated digital outputs | 5 |
| Type | hs+ls switch |
| Max load | 3 x 3 A 2 x 1.5 A |

Inputs

| | |
|---------------------------|-------------------------------------|
| Max number of inputs | 32 |
| Voltage inputs | 16 |
| Signal range | 0 - 5 Vdc |
| Frequency inputs | 8 |
| Signal high | 4 Vdc - 32 Vdc |
| Signal low | 0 - 1 Vdc |
| Alternative configuration | Quadrature in (4) Digital in (8) |
| Dedicated digital inputs | 8 |
| Signal high | 4 Vdc - 32 Vdc |
| Signal low | 0 - 1 Vdc |

Application

The IQAN-MC3 is a SIL2 rated master module in the IQANdesign platform. It can be used as a standalone controller, as a single bus master, or together with other IQAN master modules.

All IQAN modules are designed with the functional safety requirements of mobile machines in mind. The IQAN-MC3 is especially suited for applications with higher demands on functional safety, where there is a need to prove the safety integrity of each implemented safety function. It is designed in accordance with IEC 61508, and can be used to implement safety functions of up to SIL2. When applying EN ISO 13849-1 for safety functions, it can be used as a PLd subsystem.

All of the 32 inputs on the IQAN-MC3 can be used for safety related signals, when the inputs are configured in pairs. On the unit there are analog inputs for 0-5 V signals from e.g. hall-effect or potentiometer sensors; digital inputs for e.g. switches; and frequency inputs. Frequency inputs can be configured to read signals from quadrature encoders, or alternatively to be used as digital inputs.

As a supply for sensors, it has two separately monitored 5 V reference signals.

All of the outputs on the IQAN-MC3 can be used for safety related signals. There are four proportional current outputs designed to drive proportional hydraulic valves, where each output controls one bi-directional valve section. The unit also has five digital outputs for driving on-off solenoids. Two of these are also intended to function as alarm outputs, for e.g. LED lamps.


The enclosure is designed to protect the electronics in a harsh environment on mobile machines. On the front of the unit, there are four sealed and individually keyed Deutsch DT connectors.


Description

IQAN-MC3

Ordering PN

20077717

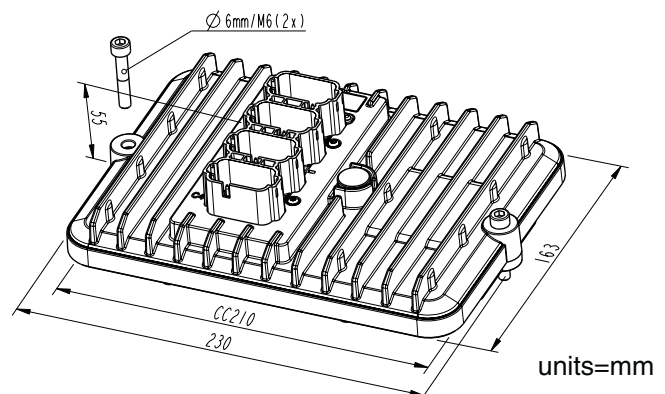

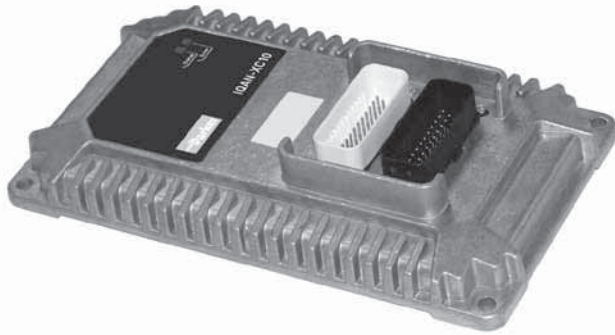**General**

| | |
|----------------------------|-----------------------------------|
| Weight | 1.2 kg |
| Temperature range | |
| Operating, ambient | -40 to +85 °C |
| Storage, ambient | -40 to +85 °C |
| Protection | IP66 |
| Voltage supply | 7.5 - 32 Vdc |
| Current consumption (idle) | 60 mA (28 VDC) 70 mA (14 VDC) |
| Data interface | Parker ICP (IQAN CAN Protocol) |

Outputs

| | |
|-------------------|------------------|
| Digital out high | 16 |
| Type | high-side switch |
| Max load | 2.5 A |
| Max PWM frequency | 500 Hz |
| Digital out low | 4 |
| Type | low-side switch |
| Max load | 2.5 A |

Inputs

| | |
|------------------|-----------------|
| Voltage inputs | 10 |
| Signal range | 0 - 5 Vdc |
| Resolution | 5 mV |
| Frequency inputs | 4 |
| Signal range | 0 - 10000 Hz |
| Digital inputs | 16 |
| Signal high | 3.65 Vdc - VBAT |
| Signal low | 0 - 1.56 Vdc |

Application

The IQAN-XC10 is an IQANdesign platform expansion module in the IQAN product group. This unit is designed to get a high digital I/O count in one module.

All IQAN expansion modules communicate with a master over a CAN bus, using the IQAN CAN protocol. The module has a large number of digital inputs for connection to switches. It also has analog inputs for connection to 0-5 Vdc sensors from resistive or Hall-effect sensors and joysticks. The sensors can be powered from the 5 V reference on the module. For flexibility, all of the analog voltage inputs can also be configured as digital inputs.

There are two types of frequency inputs, allowing for both active sensors, such as Hall effect sensors, and for inductive pickup sensors.

The module has a large number of digital outputs designed for driving on-off solenoids in a hydraulic system. The dedicated digital outputs can also be used for driving other types of loads, such as LEDs.

Some of the outputs can also be configured as PWM outputs, for less demanding proportional functions when temperature compensation is not needed. The PWM outputs are configured in pairs, where each pair is intended for one valve section. These outputs are monitored, and use a combination of high-side and low-side switches to make it possible to shut down in the event of wiring faults.


The IQAN-XC10 is designed for use on mobile machinery. It uses two keyed 35-pin Ampseal connectors. The unit also has two LEDs for aiding diagnostics when it is not connected to a master display.

Description

IQAN-XC10

Ordering PN

20077638

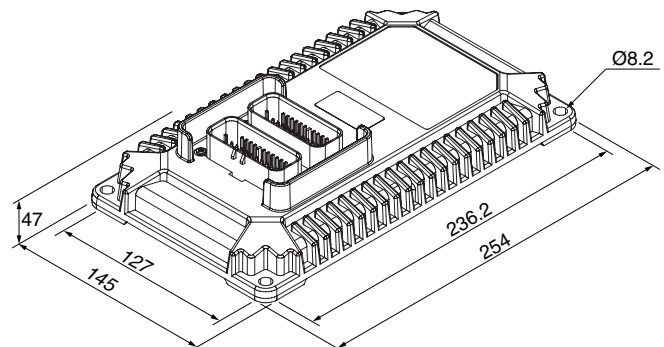

units=mm

**General**

| | |
|----------------------------|-----------------------------------|
| Weight | 0.7 Kg |
| Operating temperature | -40 to +70 °C |
| Protection | outdoor use |
| Voltage supply | 11- 32 VDC |
| Current consumption (idle) | 75 mA (28 VDC) 95 mA (14 VDC) |
| Data interface | Parker ICP (IQAN CAN Protocol) |

Outputs

| | |
|--------------------------|-----------------------------|
| Proportional outputs | 6 double (max) ¹ |
| Type current mode | current - closed-loop |
| PWM mode | voltage - open-loop |
| Signal range | 100 - 2000 mA |
| Dither frequency | 25 - 333 Hz |
| Resolution | 1 mA |
| Digital outputs | 12 (max) ¹ |
| Type | high side switch |
| Total load (all outputs) | 20 A |

Inputs

| | |
|---------------------------|--------------------------|
| Voltage inputs | 8 (max) ¹ |
| Signal range | 0 - 5 VDC |
| Resolution | 5 mV |
| Frequency inputs | 4 (max) ¹ |
| Signal range (speed mode) | 2 - 30000 Hz |
| (position mode) | 0 - 30000 Hz |
| Quadrature inputs | 2 (max) ¹ |
| Signal range (speed mode) | 2 - 30000 Hz |
| (position mode) | 0 - 30000 Hz |
| Digital inputs | 20 (max) ¹ |
| Signal high | 4 VDC - V _{BAT} |
| Signal low | 0 - 1 VDC |

1) The flexible inputs and outputs share the same physical pins. The user defines the channels/pins with IQANdesign.

Application

The IQAN-XA2 is the next generation of expansion module in the IQAN product group and is used with the IQANdesign platform. This unit is designed for high digital I/O count, weather resistance, and safety.

All IQAN expansion modules communicate with a master over a CAN bus. The XA2 module has new I/O flexibility that allows the user greater freedom in defining signals for measurement and control.

The IQAN-XA2 can control proportional valves using current mode (current closed-loop) or PWM mode (voltage open-loop) signals. The analog inputs accept 0-5V signals from input devices or sensors. These inputs can also be set up to accept 4 frequency or 2 directional frequency (quadrature) inputs. Many outputs may alternatively be used as digital inputs for switches. The XA2 also has a number of high power digital (on-off) outputs.

The aluminum housing is designed to be rugged, but light and has a sealed, automotive AMP/Tyco power timer connector. The XA2 has a membrane to prevent condensation inside the housing. This controller is designed for the outdoor environment.

The unit executes a self-test during start up and cyclic operation. An internal watch dog checks for software errors and will interrupt outputs if errors are detected. The IQAN-XA2 is made using selected components and conforms to strict international requirements.


Diagnostics: If an error is detected an LED on the top of the controller flashes a sequence to indicate the nature of the error.

Description

IQAN-XA2

Ordering PN

5010033

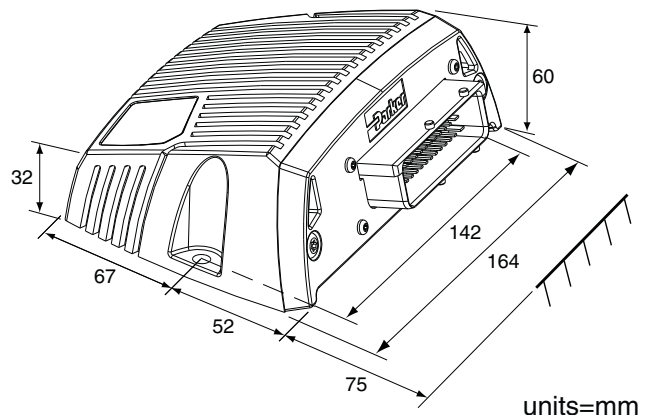

**General**

| | |
|----------------------------|-----------------------------------|
| Weight | 0.7 Kg |
| Operating temperature | -40 to +70 °C |
| Protection | outdoor use |
| Voltage supply | 11- 32 VDC |
| Current consumption (idle) | 75 mA (28 VDC) 95 mA (14 VDC) |
| Data interface | Parker ICP (IQAN CAN Protocol) |

Outputs

| | |
|--------------------------|------------------|
| Digital outputs | 12 |
| Type | high side switch |
| Total load (all outputs) | 20 A |

Inputs

| | |
|----------------|--------------------------|
| Voltage inputs | 8 (max) ¹ |
| Signal range | 0 - 5 VDC |
| Resolution | 5 mV |
| Digital inputs | 20 (max) ¹ |
| Signal high | 4 VDC - V _{BAT} |
| Signal low | 0 - 1 VDC |

1) The flexible inputs and outputs share the same physical pins. The user defines the channels/pins with IQANdesign.

Application

The IQAN-XS2 is the next generation of expansion module in the IQAN product group and is used with the IQANdesign platform. This unit is designed for high digital I/O count, weather resistance, and safety.

All IQAN expansion modules communicate with a master over a CAN bus. The XS2 module has a large number of inputs and outputs that allows the user to have fewer modules for digital signals.

The IQAN-XS2 can control valves using digital (on-off) output signals. The analog inputs accept 0-5V signals from input devices or sensors. These analog inputs may alternatively be used as high impedance digital inputs for switches. The XS2 also has a number of dedicated digital (on-off) inputs.

The aluminum housing is designed to be rugged, but light and has a sealed, automotive AMP/Tyco power timer connector. The XS2 has a membrane to prevent condensation inside the housing. This controller is designed for the outdoor environment.

The unit executes a self-test during start up and cyclic operation. An internal watch dog checks for software errors and will interrupt outputs if errors are detected. The IQAN-XS2 is made using selected components and conforms to strict international requirements.


Diagnostics: If an error is detected an LED on the top of the controller flashes a sequence to indicate the nature of the error.

Description

IQAN-XS2

Ordering PN

5010017

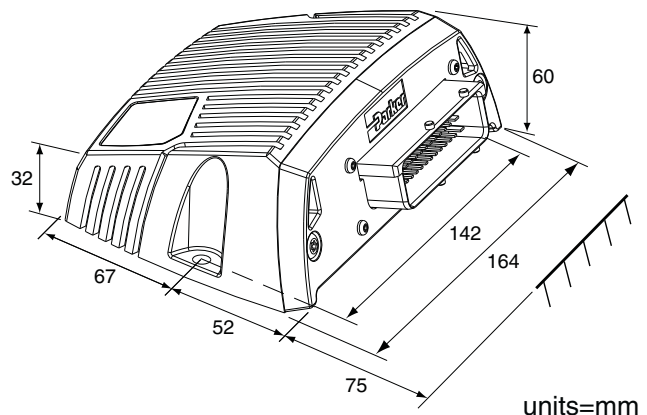

units=mm

**General**

| | |
|----------------------------|-----------------------------------|
| Weight | 0.1 kg |
| Temperature range | |
| Operating, ambient | -40 to +70 °C |
| Storage, ambient | -40 to +100 °C |
| Protection | IP32 |
| Voltage supply | 9 - 32 Vdc |
| Current consumption (idle) | 20 mA (28 Vdc) 30 mA (14 Vdc) |
| CE marking | 2004/108/EC |
| Data interface | Parker ICP (IQAN CAN Protocol) |

Outputs

| | |
|-----------------------|----------------------|
| Digital out low | up to 8 ¹ |
| Type | low-side switch |
| Max load, 1 output | 300 mA |
| Max load, all outputs | 1700 mA |

Inputs

| | |
|---------------------------|-----------------------|
| Voltage inputs | up to 8 ¹ |
| Signal range | 0 - 5 Vdc |
| Resolution | 1.22 mV |
| Frequency inputs | up to 10 ¹ |
| Signal range (FIN-A to B) | 1 - 20000 Hz |
| Signal range (FIN-C to J) | 1 - 4000 Hz |
| Logic level high | >4 Vdc |
| Logic level low | <1 Vdc |
| Encoder inputs | up to 1 ¹ |
| Signal range | 0 - 20000 Hz |
| Logic level high | >4 Vdc |
| Logic level low | <1 Vdc |
| Digital inputs | up to 20 ¹ |
| Signal high | >4 Vdc |
| Signal low | <1 Vdc |

Sensor supplies

| | |
|-----------------------|--------------------|
| Voltage references | 2 |
| Supply range | 5 Vdc ±100 mV |
| Max load C2 connector | 70 mA (has 2 pins) |
| Max load C3 connector | 70 mA (has 1 pin) |

1) depending on configuration

Application

The IQAN-XC21 is an IQANdesign platform expansion module in the IQAN product group. This unit is a small dimension I/O module to be used as an expansion unit in an IQAN system. It is also useful as an interface with the IQAN-LC6-X05 joystick to provide CAN capability.

All IQAN expansion modules communicate with a master over a CAN bus, using the IQAN CAN protocol. The IQAN-XC21 module has I/O flexibility that allows the user freedom in defining signals for measurement and control.

The IQAN-XC21 has up to 20 digital inputs for connection to switches. Up to 8 of these inputs may be configured as voltage inputs for connection of 0-5 Vdc signals from resistive or Hall-effect sensors and joysticks. The sensors can be powered from one of the 5 Vdc reference voltages on the module.

The remaining 12 inputs can be configured as up to 10 frequency inputs and 1 encoder input for measuring speed and position.

The module's low power digital outputs are designed for driving low power loads such as relays, LEDs or alarm buzzers. The outputs share pins with the inputs and are configured using IQAN software.

The IQAN-XC21 is designed for in-cab use on mobile machinery. It uses four Molex Micro-fit connectors of varying pin density to prevent wiring mix-ups. The module has addressing in the wiring harness through use of an IDtag; the addressing of the IQAN-XC21 allows up to 8 modules of this type on the bus.


The housing is designed for stacking multiple modules, providing a high density of I/O in a small footprint. The module also has pins that allow 'daisy chaining' of power and CAN for simplified cable harness installation.

Description

IQAN-XC21

Ordering PN

20077775

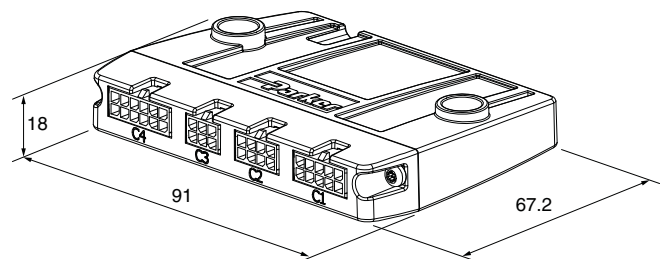

units=mm

**General**

| | |
|----------------------------|---|
| Weight | 0.7 Kg |
| Operating temperature | -40 to +70 °C |
| Protection | outdoor use |
| Voltage supply | 9 - 34 VDC |
| Current consumption (idle) | 160 mA (28 VDC) 140 mA (14 VDC) |
| Data interface | Parker ICP (IQAN CAN Protocol) |
| Additional CAN hub | J1939 or other byte aligned CAN protocol |

Outputs

| | |
|---|--------------------|
| Proportional current outputs | |
| Number | 2 double |
| Signal range | 60 - 1800 mA |
| Dither frequency | 25 - 150 Hz |
| Dither amplitude | 0 - 500 mA |
| Resolution | 0.7 mA |
| Digital/ PWM (no current feedback) | |
| Number | 6 / 3 double |
| Type | high side switch |
| Max load | 3 A |
| PWM frequency | 25 - 2000 Hz |
| E-gas/Servo motor output (PWM H-bridge) | |
| Number | 1 |
| Signal Range | 0-100% rated power |
| Max load | 2,5A |
| Total load (all outputs) | 20 A |

Inputs

| | |
|-------------------|-------------|
| Voltage/Frequency | |
| Number | 10/3 |
| Signal range | 0 - 5 VDC |
| Resolution | 5 mV |
| Frequency range | 1-10 000 Hz |

Application

IQAN-XT2 is one of the IQAN expansion modules from the IQANdevelop platform that is also supported in IQANdesign platform systems. Key features for this type of module are flexibility, weather resistance and safety.

All IQAN expansion modules communicate with a master over a CAN-BUS serial link. The XT2 has an additional CAN hub designed to interface with J1939 diesel engines on mobile machinery and has a dedicated output for electronic throttle control.

The IQAN-XT2 module has a flexible I/O interface which gives system designers increased options. The same physical pin can be used for different types of inputs or outputs. Types of I/O such as E-gas and PWM outputs increase the flexibility of the module. Digital outputs now have features such as softstart and peak & hold. The J1939 CAN hub allows the XT2 to communicate directly with an electronic engine control bus.

The aluminum housing is designed to be rugged, but light and has a sealed, automotive AMP/Tyco power timer connector. The XT2 has a membrane to prevent condensation inside the housing. This controller is designed for the outdoor environment.

The unit executes a self-test during start up and cyclic operation. An internal watch dog checks for software errors and will interrupt outputs if errors are detected. The IQAN-XT2 is made using selected components and conforms to strict international requirements.


Diagnostics: If an error is detected an LED on the top of the controller flashes a sequence to indicate the nature of the error.

Description

IQAN-XT2

Ordering PN

5010018

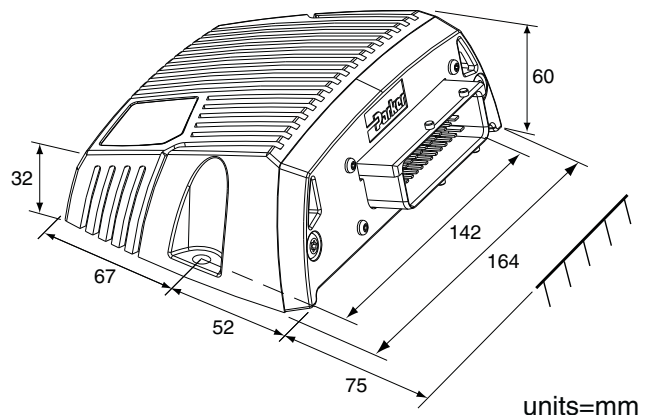

**General (Lever base)**

| | |
|-----------------------------|---------------------------------|
| Weight | .41 kg |
| Voltage supply | 9 - 32 Vdc |
| Current consumption | 45mA @ 14Vdc 30mA @ 28Vdc |
| CAN (ISO 11898) Protocol | CAN 2.0b ICP (IQAN Protocol) |

Mechanical (Lever base)

| | |
|---------------------------------------|-----------|
| Angle of movement | ±18° |
| Expected life (full stroke cycles) | 5 million |
| Lever force in neutral, XY | 0.6 Nm |
| Full actuated, XY direction | 1.4 Nm |
| One time loading (max.) | 100 Nm |

Environmental (Lever base)

| | |
|------------------------|----------------|
| Temperature range | |
| Operating, ambient | -40 to +85° C |
| Storage, ambient | -40 to +100° C |
| Sealing (above flange) | IP65 |

Connection

| | |
|-----------------------|---------------------------------------|
| Electrical connection | Deutsch DTM, 2x 6 pos., 1x 12 pos. |
|-----------------------|---------------------------------------|

Inputs

| | |
|-----------------------------|----------|
| Voltage inputs ¹ | 8(1) |
| Signal range | 0-5 Vdc |
| Resolution | 1.2 mV |
| Digital inputs | 5 |
| Signal high | >4 Vdc |
| Signal low | <= 1 Vdc |

1) The voltage inputs share the same physical pins. The user defines the channels/pins with IQAN software.

Outputs

| | |
|----------------|-------------------------------------|
| Digital output | 1 |
| Type | high side switch Max load 200 mA |

Application

The IQAN-LC5-C01 is a large, coordinate joystick that incorporates ruggedness, functionality, light weight with high flexibility for mobile market applications. The unit is extremely robust, able to withstand aggressive conditions during outdoor use and in outdoor installations, including EMI, vibrations and a wide temperature range. The IQAN-LC5-C01 has high I/O count and the ability to support up to 5 axes in IQANdesign platform applications.

Fourth generation IQAN-LL joysticks are easily replaced with the IQAN-LC5-C02/C03 versions. The U, N and G handles are offered.

The IQAN-LC5 housing has integrated Deutsch transportation connectors. The handle cable may be routed completely through the main, non-corrosive housing. This makes field mounting of new handles or replacing a bellow very easy to accomplish.


All proportional inputs are of contactless Hall effect type with dual sensors to provide redundancy for high safety and reliability. This makes it easy for the application designer to meet high safety requirements on functions by using IQAN software.

The IQAN-LC5-C01/C02 CAN levers are connected to other modules through a CAN bus.

Description

| Description | Ordering PN |
|-------------------------------|-------------|
| IQAN-LC5-C01-U1 | 20076330 |
| IQAN-LC5-C01-U2 | 20076331 |
| IQAN-LC5-C01-G | 20077750 |
| IQAN-LC5-C02-U1 | 20076333 |
| IQAN-LC5-C02-U2 | 20076334 |
| IQAN-LC5-C02-N2 | 20077690 |
| IQAN-LC5-C02-N2E ¹ | 20077686 |
| IQAN-LC5-C02-N2T | 20077685 |
| IQAN-LC5-C02-N4 | 20077688 |
| IQAN-LC5-C03-G | 20077752 |

1) wired to replace E2 handle functionality

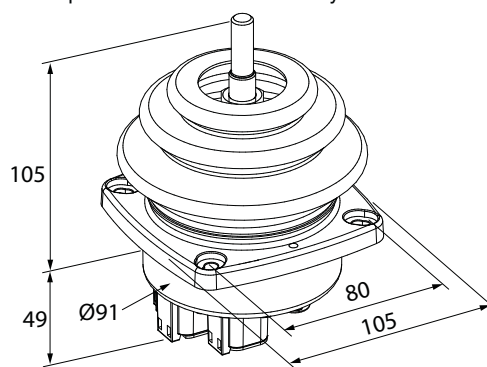

units=mm

-MP handle for IQAN-LC5-C0x

IQAN System Products



General (handle)

Weight .25 kg
 Temperature range -40 to +85° C
 Sealing outdoor use

Buttons/Trigger

Expected life (electrical) 0.5 million
 Expected life (mechanical) 1 million
 Travel 1.5 mm
 Actuating force 2 - 5 Nm
 Switching current (max) 400 mA, 32 VAC, resistive load


Thumb wheel

Rated power supply (Vs) 5 Vdc
 Load resistive (min) 4.5 kΩ
 Load capacitive (max) 1 uF
 Current consumption (typ) 16 mA
 Analog output active range 10%-90% Vs
 Resolution < 2 mV
 Angle of movement ± 25 degrees
 Expected life (operations) 5 million

Connection

B0W0T1 / B2W0T0 / B2W0T1 / B4W0T0 B0W0T1 / B4W0T1 / B4W0T1x / B2W2Tx / B8W0Tx
 Deutsch DTM, 6 pos.
 Deutsch DTM, 12 pos.

MP standard faceplate configurations

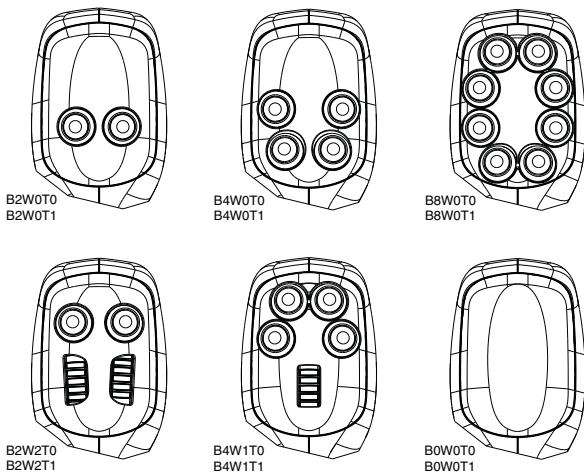

Application


The MP handle option provides a variety of control interfaces in an ergonomic, multi-function handle that comfortably fits your hand. The handle is a robust design, able to withstand heavy use in outdoor installations, including exposure to a wide range of automotive chemicals. The handle has the capability to have a maximum of 8 buttons or 2 proportional thumb wheels in the faceplate. Combinations of buttons, thumb wheels, and trigger are also possible. The MP handle will be assembled to the IQAN-LC5 base, and the cables are routed through the base. The push buttons and thumb wheel are easily connected to the vehicle wire harness by a Deutsch DTM connector.

The MP handle is made to fit either the right or left hand, reducing inventory part numbers. The buttons are large, and have a nice tactile feel. The proportional thumb wheel has dual sensors providing 2 crossed outputs that may be compared in IQAN modules for safe operation.

Description

| Description | Ordering PN |
|-----------------------|-------------|
| IQAN-LC5-C01-MPB2W0T0 | 20076996 |
| IQAN-LC5-C01-MPB2W0T1 | 20076997 |
| IQAN-LC5-C01-MPB2W2T1 | 20076999 |
| IQAN-LC5-C01-MPB4W0T0 | 20077000 |
| IQAN-LC5-C01-MPB4W0T1 | 20077001 |
| IQAN-LC5-C01-MPB4W1T1 | 20077003 |
| IQAN-LC5-C01-MPB8W0T1 | 20077005 |

Consult datasheet and pricelist for other IQAN-LC5-C01-MP options and ordering part numbers.

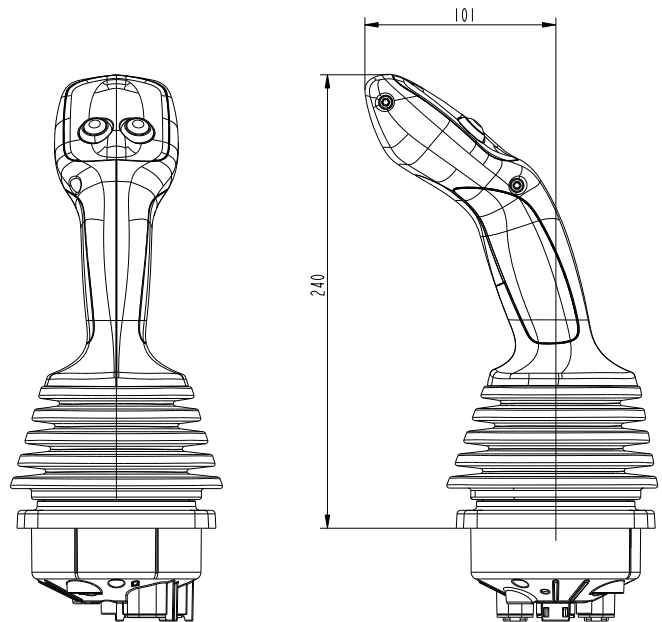

units=mm

**General**

| | |
|--------------------------|---|
| Weight | 0.2 kg |
| Rated power supply | 12-24 Vdc |
| Min/max power | 9/32 Vdc |
| Operating temperature | -30°C to +70°C |
| (reduced display update) | -30°C to -10°C |
| Protection | outdoor use |
| Current consumption | max 100 mA (28 Vdc), max 180 mA (14 Vdc) |
| Data interface | Parker ICP (IQAN CAN Protocol) |

Display

| | |
|----------------|--------------------|
| Type | 2.8" B/W LCD |
| Resolution | 202x32 pixels |
| Performance | |
| Processor | 16-bit (16 MHz) |
| Sample time | 20-100 ms |
| Software tools | IQANdevelop family |

Communication interfaces

| | |
|-----------------|--------------------------------------|
| CAN (ISO 11898) | 1 |
| Protocols | ICP, SAE J1939, CANopen, etc |
| RS-232 | 1 |
| Protocols | AT-Hayes, GSM07.07, GSM07.05, IDP |

Outputs

| | |
|----------------|--------------------|
| Digital output | 1 |
| Type | high side switch |
| Max load | 1.2 A |
| Buzzer | Sound alarm output |

Application

The IQAN-MDM is a legacy master unit that works with the expansion modules in the IQANdevelop platform control system. The IQAN-MDM is fully programmable for use in any machine application. The unit works as a master for controlling applications, as a graphical user interface and as a CAN interface.

IQAN-MDM uses an improved 2.8" FSTN, black & white LCD for the best readability in all lighting conditions. The improved display uses Chip-On-Glass technology for higher reliability.

Function buttons and control buttons in combination with a graphical display makes system feedback with user interaction possible. With the three function buttons, a decrease/increase value-button and an escape-button, it is easy to adjust, calibrate and measure the IQAN system. In case of an error the display will alert the operator with a signal and a message on the display.

IQAN-MDM is designed for in-cab as well as outdoor use. It can be used in both 12 and 24 Vdc systems. The IQAN-MDM is connected to other units by a CAN bus. The CAN bus may be configured as ICP (IQAN CAN Protocol), SAE J1939 or Generic CAN. The RS232 interface is used for connection with PC and for land line or wireless modem (remote diagnostic) connection.

The IQAN-MDM also contains a real time clock, an alarm output and can present text in 10 different languages. A green LED indicator on the back of the module indicates supply voltage and status "heartbeat".


The MDM is not recommended for new installations.

Description

IQAN-MDM

Ordering PN

5010010

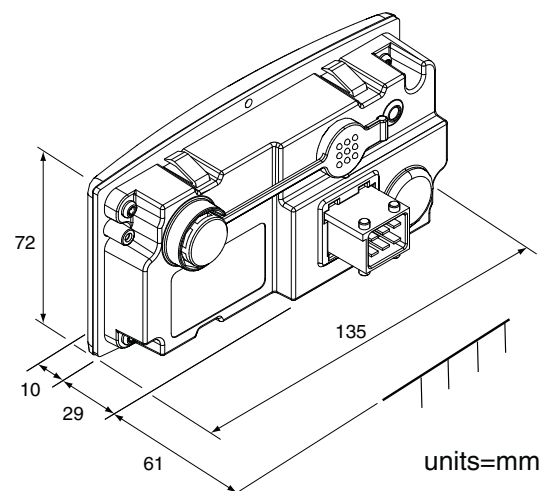

**General**

| | |
|----------------------------|-----------------------------------|
| Weight | 0.7 Kg |
| Operating temperature | -40 to +70 °C |
| Protection | outdoor use |
| Voltage supply | 9 - 34 VDC |
| Current consumption (idle) | 105 mA (28 VDC) 90 mA (14 VDC) |
| Data interface | Parker ICP (IQAN CAN Protocol) |

Outputs

| | |
|------------------------------------|------------------|
| Proportional current outputs | |
| Number | 4 double |
| Signal range | 60 - 1800 mA |
| Dither frequency | 25 - 150 Hz |
| Dither amplitude | 0 - 500 mA |
| Resolution | 0.7 mA |
| Digital/ PWM (no current feedback) | |
| Number | 4/ 2 double |
| Type | high side switch |
| Max load | 3 A |
| PWM frequency | 25 - 2000 Hz |

Inputs

| | |
|-------------------|------------|
| Voltage/Frequency | |
| Number | 4/2 |
| Signal range | 0 - 5 VDC |
| Resolution | 5 mV |
| Frequency range | 1-30000 Hz |

Application

IQAN-XP2 is a legacy unit from the IQANdevelop platform of IQAN expansion modules. Key features for this type of module are flexibility, weather resistance and safety.

All IQAN expansion modules communicate with a master over a CAN-BUS serial link. Mobile machine I/O is controlled by selecting the appropriate expansion module from the IQAN product family.

The XP2 module has a flexible I/O interface which gives system designers increased options. The same physical pin can be used for different types of I/O.

Various types of I/O such as PWM outputs increase the flexibility of the module. Digital outputs have features including softstart and peak & hold.

The aluminum housing is designed to be rugged, but light and has a sealed, automotive AMP/Tyco power timer connector. The XP2 has a membrane to prevent condensation inside the housing. This controller is designed for the outdoor environment.

The unit executes a self-test during start up and cyclic operation. An internal watch dog checks for software errors and will interrupt outputs if errors are detected. The IQAN-XP2 is made using selected components and conforms to strict international requirements.

Diagnostics: If an error is detected an LED on the top of the controller flashes a sequence to indicate the nature of the error.


The XP2 is not recommended for new installations.

Description

IQAN-XP2

Ordering PN

5010016

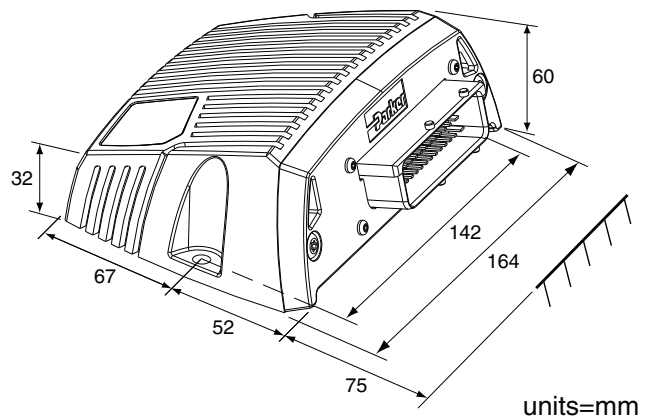

**General**

| | |
|----------------------------|---|
| Weight | 0.7 Kg |
| Operating temperature | -40 to +70 °C |
| Protection | outdoor use |
| Voltage supply | 9 - 34 VDC |
| Current consumption (idle) | 180 mA (28 VDC) 170 mA (14 VDC) |
| Data interface | RS232 (using IQANdevelop) |
| CAN hub | J1939 or other byte aligned CAN protocol |

Outputs

| | |
|------------------------------------|------------------|
| Proportional current outputs | |
| Number | 2 double |
| Signal range | 60 - 1800 mA |
| Dither frequency | 25 - 150 Hz |
| Dither amplitude | 0 - 500 mA |
| Resolution | 0.7 mA |
| Digital/ PWM (no current feedback) | |
| Number | 6 / 3 double |
| Type | high side switch |
| Max load | 3 A |
| PWM frequency | 25 - 2000 Hz |

Inputs

| | |
|-------------------|-------------|
| Voltage/Frequency | |
| Number | 10/4 |
| Signal range | 0 - 5 VDC |
| Resolution | 5 mV |
| Frequency range | 2-10 000 Hz |

Application

IQAN-TOC8 is a legacy standalone controller from the IQANdevelop platform of modules in the IQAN product group. These modules focus on flexibility, weather resistance and safety.

IQAN-TOC8 is a general purpose controller and communicates with a variety of input and output devices. It connects to a laptop PC and is programmed with IQANdevelop software. No Master module is required. It has proportional current outputs for valve control, digital/PWM outputs for auxiliary functions and analog/digital inputs for signals like pressure, RPM or temperature. The unit has a CAN hub designed to interface with a SAE J1939 network.

The IQAN-TOC8 has a flexible I/O interface. The same physical pin can be used for different types of I/O. New types of I/O such as digital PWM outputs increase the flexibility of the controller. The digital outputs have new features such as softstart and peak & hold.

The aluminum housing is designed to be rugged, but light and has a sealed, automotive AMP/Tyco power timer connector. The TOC8 has a membrane to prevent condensation inside the housing. This controller is designed for the outdoor environment.

The unit executes a self-test during start up and cyclic operation. An internal watch dog checks for software errors and will interrupt outputs if errors are detected. The IQAN-TOC8 is made using selected components and conforms to strict international requirements.

Diagnostics: If an error is detected an LED on the top of the controller flashes a sequence to indicate the nature of the error.


The TOC8 is not recommended for new installations.

Description

IQAN-TOC8

Ordering PN


5010024

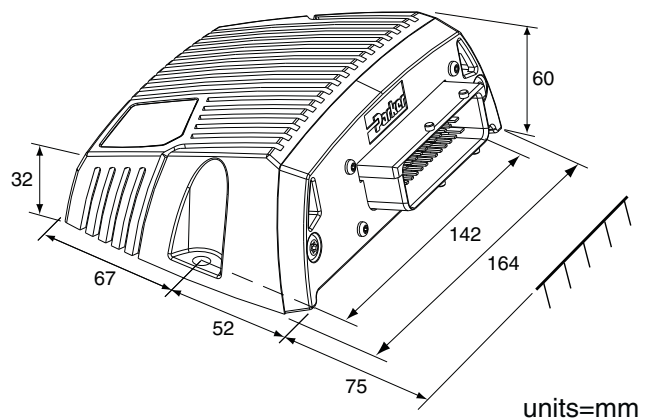


Communication cables

5030024


RS232-programming cable
length: 1,5 meters
use with: IQAN-MDM, -TOC8
(TOC8 requires adapter cable)

**5030080**


Remote diagnostics-modem cable
length: 1,5 meters
use with: IQAN-MDM, -TOC8,
(TOC8 requires adapter cable)

**5030089**


Adapter-cable, panel mount
length: 0,4 meters
use with: IQAN-TOC8, -TOC2

**5030103**


RS232-programming cable
length: 1,5 meters
use with: IQAN-MDL2

**5030110**


USB-programming cable
length: 1,5 meters
use with: IQAN-MDL2

**5030124**

USB adapter-cable, panel mount
length: 0,4 meters
use with: IQAN-MC2, -MD3

**2830014**


USB adapter-cable, panel mount
length: 0,4 meters
use with: IQAN-MDL2




Prototype installation cables

5030025


C1-cable, no seals
length: 2,5 meters
use with: IQAN-MDL2

**5030029**


C1-cable, with seals
length: 2,5 meters
use with: IQAN-MDM

**5030030**


C1-cable, with seals
length: 2,5 meters
use with: IQAN-XA2, -XS2, -XT2,
-XP2, -TOC8, -MC2

**5030125**


C1-cable, sealed
length: 2,5 meters
use with: IQAN-MD3, -MD4/5

**5030126**


C2-cable, sealed
length: 2,5 meters
use with: IQAN-MD3, -MD4/5

**5030127¹**


C1-cable, sealed
length: 2,5 meters
use with: IQAN-LC5-C01, -C02
1) from catalog HY33-1800/US

**5030216**


C1-cable, sealed, key A
length: 2,5 meters
use with: IQAN-MC3

**5030217**


C2-cable, sealed, key B
length: 2,5 meters
use with: IQAN-MC3

**5030218**

C3-cable, sealed, key C
length: 2,5 meters
use with: IQAN-MC3

**5030219**

C4-cable, sealed, key D
length: 2,5 meters
use with: IQAN-MC3



Accessories

IQAN System Products

Connector kits


5031022

C1-connector, 6 position
use with: IQAN-MDM




5031063

C1-connector, 42 position
use with: IQAN-XA2, -XS2, -XT2,
-XP2, -TOC8, -MDL2, -MC2




20072406

C1-connector (grey), 12 position
use with: IQAN-G1




20073081

C1-connector (grey), 12 position
C2-connector (black), 12 position
use with: IQAN-MD3, -MD4/5




5035007

C1/C3-connector (grey), 6 pos.
C2-connector (grey), 12 position
use with: IQAN-LC5-C01, -C02/3



5035016


C1-connector (key A), 18 position
C2-connector (key B), 18 position
C3-connector (key C), 18 position
C4-connector (key D), 18 position
use with: IQAN-MC3



Address tags


5030060 - 5030067

IQAN address tags 0-7 with AMP
terminals.
Bag of 10 pcs.




5030070 - 5030077

IQAN address/termination tags 0T-
7T with AMP terminals.
Bag of 10 pcs.




5030160 - 5030167

IQAN address tags 0-7 with
Deutsch terminals.
Bag of 10 pcs.



5030170 - 5030177

IQAN address/termination tags 0T-
7T with Deutsch terminals.
Bag of 10 pcs.



Additional items

5010011

IQAN-LF1 electric speed/throttle
pedal.
use with: Engine ECUs, IQAN
systems.



20075848¹

IQAN-G1 gateway. Wireless GSM
modem for remote diagnostics.
use with: IQAN-MDM, -TOC8,
-MDL2, -MD3



- 1) Wireless service providers must also offer two-way Circuit Switched Data (CSD) services for transferring data. The IQAN-G1 will not be suitable for use in any region where the GSM service providers do not offer CSD.

20077751²

IQAN-G2 gateway. Wireless
GSM/GPRS modem for remote
diagnostics over internet.
use with: IQAN-MDL2, -MD3,
-MD4/5, -MC2



- 2) IQAN-G2 functionality will be available with a SIM-card from your preferred Network operator, and a paid subscription to a server solution that is offered by a partnered supplier.

Consult "IQAN accessories" datasheet and pricelist for other accessory items and ordering part numbers.

Terms of Sale with Warranty Limitations

Offer of Sale

The items described in this document and other documents and descriptions provided by Parker Hannifin Corporation, Hydraulics Group, and its authorized distributors ("Seller") are hereby offered for sale at prices to be established by Seller. This offer and its acceptance by any customer ("Buyer") shall be governed by all of the following Terms and Conditions. Buyer's order for any item described in its document, when communicated to Seller verbally, or in writing, shall constitute acceptance of this offer. All goods or work described will be referred to as "Products".

1. Terms and Conditions. Seller's willingness to offer Products, or accept an order for Products, to or from Buyer is expressly conditioned on Buyer's assent to these Terms and Conditions and to the terms and conditions found on-line at www.parker.com/saleterms/. Seller objects to any contrary or additional term or condition of Buyer's order or any other document issued by Buyer.

2. Price Adjustments; Payments. Prices stated on the reverse side or preceding pages of this document are valid for 30 days. After 30 days, Seller may change prices to reflect any increase in its costs resulting from state, federal or local legislation, price increases from its suppliers, or any change in the rate, charge, or classification of any carrier. The prices stated on the reverse or preceding pages of this document do not include any sales, use, or other taxes unless so stated specifically. Unless otherwise specified by Seller, all prices are F.O.B. Seller's facility, and payment is due 30 days from the date of invoice. After 30 days, Buyer shall pay interest on any unpaid invoices at the rate of 1.5% per month or the maximum allowable rate under applicable law.

3. Delivery Dates; Title and Risk; Shipment. All delivery dates are approximate and Seller shall not be responsible for any damages resulting from any delay. Regardless of the manner of shipment, title to any products and risk of loss or damage shall pass to Buyer upon tender to the carrier at Seller's facility (i.e., when it's on the truck, it's yours). Unless otherwise stated, Seller may exercise its judgment in choosing the carrier and means of delivery. No deferment of shipment at Buyers' request beyond the respective dates indicated will be made except on terms that will indemnify, defend and hold Seller harmless against all loss and additional expense. Buyer shall be responsible for any additional shipping charges incurred by Seller due to Buyer's changes in shipping, product specifications or in accordance with Section 13, herein.

4. Warranty. Seller warrants that the Products sold hereunder shall be free from defects in material or workmanship for a period of eighteen months from the date of delivery to Buyer. The prices charged for Seller's products are based upon the exclusive limited warranty stated above, and upon the following disclaimer: **DISCLAIMER OF WARRANTY: THIS WARRANTY COMPRISES THE SOLE AND ENTIRE WARRANTY PERTAINING TO PRODUCTS PROVIDED HEREUNDER. SELLER DISCLAIMS ALL OTHER WARRANTIES, EXPRESS AND IMPLIED, INCLUDING MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE.**

5. Claims; Commencement of Actions. Buyer shall promptly inspect all Products upon delivery. No claims for shortages will be allowed unless reported to the Seller within 10 days of delivery. No other claims against Seller will be allowed unless asserted in writing within 60 days after delivery or, in the case of an alleged breach of warranty, within 30 days after the date within the warranty period on which the defect is or should have been discovered by Buyer. Any action based upon breach of this agreement or upon any other claim arising out of this sale (other than an action by Seller for any amount due to Seller from Buyer) must be commenced within thirteen months from the date of tender of delivery by Seller or, for a cause of action based upon an alleged breach of warranty, within thirteen months from the date within the warranty period on which the defect is or should have been discovered by Buyer.

6. LIMITATION OF LIABILITY. UPON NOTIFICATION, SELLER WILL, AT ITS OPTION, REPAIR OR REPLACE A DEFECTIVE PRODUCT, OR REFUND THE PURCHASE PRICE. IN NO EVENT SHALL SELLER BE LIABLE TO BUYER FOR ANY SPECIAL, INDIRECT, INCIDENTAL OR CONSEQUENTIAL DAMAGES ARISING OUT OF, OR AS THE RESULT OF, THE SALE, DELIVERY, NON-DELIVERY, SERVICING, USE OR LOSS OF USE OF THE PRODUCTS OR ANY PART THEREOF, OR FOR ANY CHARGES OR EXPENSES OF ANY NATURE INCURRED WITHOUT SELLER'S WRITTEN CONSENT, EVEN IF SELLER HAS BEEN NEGLIGENT, WHETHER IN CONTRACT, TORT OR OTHER LEGAL THEORY. IN NO EVENT SHALL SELLER'S LIABILITY UNDER ANY CLAIM MADE BY BUYER EXCEED THE PURCHASE PRICE OF THE PRODUCTS.

7. Contingencies. Seller shall not be liable for any default or delay in performance if caused by circumstances beyond the reasonable control of Seller.

8. User Responsibility. The user, through its own analysis and testing, is solely responsible for making the final selection of the system and Product and assuring that all performance, endurance, maintenance, safety and warning requirements of the application are met. The user must analyze all aspects of the application and follow applicable industry standards and Product information. If Seller provides Product or system options, the user is responsible for determining that such data and specifications are suitable and sufficient for all applications and reasonably foreseeable uses of the Products or systems.

9. Loss to Buyer's Property. Any designs, tools, patterns, materials, drawings, confidential information or equipment furnished by Buyer or any other items which become Buyer's property, may be considered obsolete and may be destroyed by Seller after two consecutive years have elapsed without Buyer placing an order for the items which are manufactured using such property. Seller shall not be responsible for any loss or damage to such property while it is in Seller's possession or control.

10. Special Tooling. A tooling charge may be imposed for any special tooling, including without limitation, dies, fixtures, molds and patterns, acquired to manufacture Products. Such special tooling shall be and remain Seller's property notwithstanding payment of any charges by Buyer. In no event will Buyer acquire any interest in apparatus belonging to Seller which is utilized in the manufacture of the Products, even if such apparatus has been specially converted or adapted for such manufacture and notwithstanding any charges paid by Buyer. Unless otherwise agreed, Seller shall have the right to alter, discard or otherwise dispose of any special tooling or other property in its sole discretion at any time.

11. Buyer's Obligation; Rights of Seller. To secure payment of all sums due or otherwise,

Seller shall retain a security interest in the goods delivered and this agreement shall be deemed a Security Agreement under the Uniform Commercial Code. Buyer authorizes Seller as its attorney to execute and file on Buyer's behalf all documents Seller deems necessary to perfect its security interest. Seller shall have a security interest in, and lien upon, any property of Buyer in Seller's possession as security for the payment of any amounts owed to Seller by Buyer.

12. Improper Use and Indemnity. Buyer shall indemnify, defend, and hold Seller harmless from any claim, liability, damages, lawsuits, and costs (including attorney fees), whether for personal injury, property damage, patent, trademark or copyright infringement or any other claim, brought by or incurred by Buyer, Buyer's employees, or any other person, arising out of: (a) improper selection, improper application or other misuse of Products purchased by Buyer from Seller; (b) any act or omission, negligent or otherwise, of Buyer; (c) Seller's use of patterns, plans, drawings, or specifications furnished by Buyer to manufacture Product; or (d) Buyer's failure to comply with these terms and conditions. Seller shall not indemnify Buyer under any circumstance except as otherwise provided.

13. Cancellations and Changes. Orders shall not be subject to cancellation or change by Buyer for any reason, except with Seller's written consent and upon terms that will indemnify, defend and hold Seller harmless against all direct, incidental and consequential loss or damage. Seller may change product features, specifications, designs and availability with notice to Buyer.

14. Limitation on Assignment. Buyer may not assign its rights or obligations under this agreement without the prior written consent of Seller.

15. Entire Agreement. This agreement contains the entire agreement between the Buyer and Seller and constitutes the final, complete and exclusive expression of the terms of the agreement. All prior or contemporaneous written or oral agreements or negotiations with respect to the subject matter are herein merged.

16. Waiver and Severability. Failure to enforce any provision of this agreement will not waive that provision nor will any such failure prejudice Seller's right to enforce that provision in the future. Invalidation of any provision of this agreement by legislation or other rule of law shall not invalidate any other provision herein. The remaining provisions of this agreement will remain in full force and effect.

17. Termination. This agreement may be terminated by Seller for any reason and at any time by giving Buyer thirty (30) days written notice of termination. In addition, Seller may by written notice immediately terminate this agreement for the following: (a) Buyer commits a breach of any provision of this agreement (b) the appointment of a trustee, receiver or custodian for all or any part of Buyer's property (c) the filing of a petition for relief in bankruptcy of the other Party on its own behalf, or by a third party (d) an assignment for the benefit of creditors, or (e) the dissolution or liquidation of the Buyer.

18. Governing Law. This agreement and the sale and delivery of all Products hereunder shall be deemed to have taken place in and shall be governed and construed in accordance with the laws of the State of Ohio, as applicable to contracts executed and wholly performed therein and without regard to conflicts of laws principles. Buyer irrevocably agrees and consents to the exclusive jurisdiction and venue of the courts of Cuyahoga County, Ohio with respect to any dispute, controversy or claim arising out of or relating to this agreement. Disputes between the parties shall not be settled by arbitration unless, after a dispute has arisen, both parties expressly agree in writing to arbitrate the dispute.

19. Indemnity for Infringement of Intellectual Property Rights. Seller shall have no liability for infringement of any patents, trademarks, copyrights, trade dress, trade secrets or similar rights except as provided in this Section. Seller will defend and indemnify Buyer against allegations of infringement of U.S. patents, U.S. trademarks, copyrights, trade dress and trade secrets ("Intellectual Property Rights"). Seller will defend at its expense and will pay the cost of any settlement or damages awarded in an action brought against Buyer based on an allegation that a Product sold pursuant to this Agreement infringes the Intellectual Property Rights of a third party. Seller's obligation to defend and indemnify Buyer is contingent on Buyer notifying Seller within ten (10) days after Buyer becomes aware of such allegations of infringement, and Seller having sole control over the defense of any allegations or actions including all negotiations for settlement or compromise. If a Product is subject to a claim that it infringes the Intellectual Property Rights of a third party, Seller may, at its sole expense and option, procure for Buyer the right to continue using the Product, replace or modify the Product so as to make it noninfringing, or offer to accept return of the Product and return the purchase price less a reasonable allowance for depreciation. Notwithstanding the foregoing, Seller shall have no liability for claims of infringement based on information provided by Buyer, or directed to Products delivered hereunder for which the designs are specified in whole or part by Buyer, or infringements resulting from the modification, combination or use in a system of any Product sold hereunder. The foregoing provisions of this Section shall constitute Seller's sole and exclusive liability and Buyer's sole and exclusive remedy for infringement of Intellectual Property Rights.

20. Taxes. Unless otherwise indicated, all prices and charges are exclusive of excise, sales, use, property, occupational or like taxes which may be imposed by any taxing authority upon the manufacture, sale or delivery of Products.

21. Equal Opportunity Clause. For the performance of government contracts and where dollar value of the Products exceed \$10,000, the equal employment opportunity clauses in Executive Order 11246, VEVRAA, and 41 C.F.R. §§ 60-1.4(a), 60-741.5(a), and 60-250.4, are hereby incorporated.

1/09

Parker's Motion & Control Technologies

At Parker, we're guided by a relentless drive to help our customers become more productive and achieve higher levels of profitability by engineering the best systems for their requirements. It means looking at customer applications from many angles to find new ways to create value. Whatever the motion and control technology need, Parker has the experience, breadth of product and global reach to consistently deliver. No company knows more about motion and control technology than Parker. For further info call 1 800 272 7537



AEROSPACE

Key Markets

- Aircraft engines
- Business & general aviation
- Commercial transports
- Land-based weapons systems
- Military aircraft
- Missiles & launch vehicles
- Regional transports
- Unmanned aerial vehicles

Key Products

- Flight control systems & components
- Fluid conveyance systems
- Fluid metering delivery & atomization devices
- Fuel systems & components
- Hydraulic systems & components
- Inert nitrogen generating systems
- Pneumatic systems & components
- Wheels & brakes



CLIMATE CONTROL

Key Markets

- Agriculture
- Air conditioning
- Food, beverage & dairy
- Life sciences & medical
- Precision cooling
- Processing
- Transportation

Key Products

- CO₂ controls
- Electronic controllers
- Filter driers
- Hand shut-off valves
- Hose & fittings
- Pressure regulating valves
- Refrigerant distributors
- Safety relief valves
- Solenoid valves
- Thermostatic expansion valves



ELECTROMECHANICAL

Key Markets

- Aerospace
- Factory automation
- Life science & medical
- Machine tools
- Packaging machinery
- Paper machinery
- Plastics machinery & converting
- Primary metals
- Semiconductor & electronics
- Textile
- Wire & cable

Key Products

- AC/DC drives & systems
- Electric actuators, gantry robots & slides
- Electrohydrostatic actuation systems
- Electromechanical actuation systems
- Human machine interface
- Linear motors
- Stepper motors, servo motors, drives & controls
- Structural extrusions



FILTRATION

Key Markets

- Food & beverage
- Industrial machinery
- Life sciences
- Marine
- Mobile equipment
- Oil & gas
- Power generation
- Process
- Transportation

Key Products

- Analytical gas generators
- Compressed air & gas filters
- Condition monitoring
- Engine air, fuel & oil filtration & systems
- Hydraulic, lubrication & coolant filters
- Process, chemical, water & microfiltration filters
- Nitrogen, hydrogen & zero air generators



FLUID & GAS HANDLING

Key Markets

- Aerospace
- Agriculture
- Bulk chemical handling
- Construction machinery
- Food & beverage
- Fuel & gas delivery
- Industrial machinery
- Mobile
- Oil & gas
- Transportation
- Welding

Key Products

- Brass fittings & valves
- Diagnostic equipment
- Fluid conveyance systems
- Industrial hose
- PTFE & PFA hose, tubing & plastic fittings
- Rubber & thermoplastic hose & couplings
- Tube fittings & adapters
- Quick disconnects



HYDRAULICS

Key Markets

- Aerospace
- Aerial lift
- Agriculture
- Construction machinery
- Forestry
- Industrial machinery
- Mining
- Oil & gas
- Power generation & energy
- Truck hydraulics

Key Products

- Diagnostic equipment
- Hydraulic cylinders & accumulators
- Hydraulic motors & pumps
- Hydraulic systems
- Hydraulic valves & controls
- Power take-offs
- Rubber & thermoplastic hose & couplings
- Tube fittings & adapters
- Quick disconnects



PNEUMATICS

Key Markets

- Aerospace
- Conveyor & material handling
- Factory automation
- Life science & medical
- Machine tools
- Packaging machinery
- Transportation & automotive

Key Products

- Air preparation
- Brass fittings & valves
- Manifolds
- Pneumatic accessories
- Pneumatic actuators & grippers
- Pneumatic valves & controls
- Quick disconnects
- Rotary actuators
- Rubber & thermoplastic hose & couplings
- Structural extrusions
- Thermoplastic tubing & fittings
- Vacuum generators, cups & sensors



PROCESS CONTROL

Key Markets

- Chemical & refining
- Food, beverage & dairy
- Medical & dental
- Microelectronics
- Oil & gas
- Power generation

Key Products

- Analytical sample conditioning products & systems
- Fluoropolymer chemical delivery fittings, valves & pumps
- High purity gas delivery fittings, valves & regulators
- Instrumentation fittings, valves & regulators
- Medium pressure fittings & valves
- Process control manifolds



SEALING & SHIELDING

Key Markets

- Aerospace
- Chemical processing
- Consumer
- Energy, oil & gas
- Fluid power
- General industrial
- Information technology
- Life sciences
- Military
- Semiconductor
- Telecommunications
- Transportation

Key Products

- Dynamic seals
- Elastomeric o-rings
- EMI shielding
- Extruded & precision-cut, fabricated elastomeric seals
- Homogeneous & inserted elastomeric shapes
- High temperature metal seals
- Metal & plastic retained composite seals
- Thermal management

Parker Hydraulics International Sales Offices

North America

Hydraulics Group Headquarters

6035 Parkland Boulevard
Cleveland, OH 44124-4141 USA
Tel: 216-896-3000
Fax: 216-896-4031

Parker Canada Division

160 Chisholm Drive Milton
Ontario Canada L9T 3G9
Tel: 905-693-3000
Fax: 905-876-1958

Parker Hannifin de México

Industrial Hydraulic Sales
Eje Uno Norte No.100
Parque Industrial Toluca 2000
Toluca, Edo, de Mexico CP 50100
Tel: 52 722 275 4200
Fax: 52 722 279 9308

Parker Hannifin de México

Mobile Hydraulic Sales
Via de FFCC a Matamoraos 730
Apodaca, NL, de Mexico CP 66600
Tel: 52 81 8156 6000
Fax: 52 81 8156 6068

Europe

Hydraulics Group Headquarters

La Tuillière 6
1163 Etoy - Switzerland
Tel: 41 21 821 8500
Fax: 41 21 821 8580

South Africa

Parker Hannifin Africa Pty Ltd

P.O. Box 1153
ZA-Kempton Park 1620,
Republic of South Africa
Tel: 27 11 961 0700
Fax: 27 11 392 7213

Mobile Sales

Mobile Sales Organization and Global Sales

850 Arthur Avenue
Elk Grove Village, IL 60007 USA
Tel: 847-258-6200
Fax: 847-258-6299

Industrial Sales

Central Region

1042 Maple Avenue
Unit 331
Lisle, IL 60532 USA
Tel: 630-964-0796

Great Lakes Region

6035 Parkland Boulevard
Cleveland, OH 44124-4141 USA
Tel: 216-896-2740
Fax: 866-498-7507

Gulf Region

20002 Standing Cypress Drive
Spring, TX 77379 USA
Tel: 817-473-4431
Fax: 888-227-9454

Southwest Region

700 S. 4th Avenue
Mansfield, TX 76063 USA
Tel: 817-473-9341
Fax: 817-473-2680

Mid Atlantic and Southeast Regions

1225 Old Alpharetta Road
Suite 290
Alpharetta, GA 30005 USA
Tel: 770-619-9767
Fax: 770-619-9806

Midwest Region

8145 Lewis Road
Minneapolis, MN 55427 USA
Tel: 763-513-3535
Fax: 763-544-3418

Northeast Region

P.O. Box 396
Pine Brook, NJ 07058 USA
Tel: 973-227-2565
Fax: 973-227-2467

Northwest Region

6458 North Basin Avenue
Portland, OR 97217 USA
Tel: 503-283-1020
Fax: 866-611-7308

Pacific Region

8460 Kass Drive
Buena Park, CA 90621
Tel: 714-228-2510
Fax: 714-228-2511

Asia Pacific

Parker Hannifin Shanghai Ltd

280 Yunqiao Road,
Jin Qiao Export Processing Zone
Shanghai 201206, China
Tel: 86 21 2899 5000
Fax: 86 21 6445 9917

Parker Hannifin Hong Kong Ltd

8/F, Kin Yip Plaza
9 Cheung Yee Street
Cheung Sha Wan, Hong Kong
Tel: 852 2428 8008
Fax: 852 2425 6896

Parker Hannifin Korea Ltd

9F KAMCO Yangjae Tower
949-3 Dogok1-dong, Gangnam-gu
Seoul, 135-860, Korea
Tel: 82 2 559 0400
Fax: 82 2 556 8187

Parker Hannifin India Pvt Ltd

Plot No. EL-26, MIDC
TTC Industrial Area
Mahape, Navi Mumbai, 400 709 India
Tel: 91 22 6513 7081
Fax: 91 22 2768 6841

Parker Hannifin Australia

Parker Hannifin Pty Ltd.
9 Carrington Road
Castle Hill, NSW 2154, Australia
Tel: 612 9634 7777
Fax: 612 9842 5111

Latin America

Parker Hannifin Ind. e Com. Ltda Hydraulics Division

Av. FredericoRitter, 1100
94930-000 Cachoeirinha RS, Brazil
Tel: 55 51 3470 6090
Fax: 55 51 3470 9281

Parker Hannifin Argentina S.A.I.C.

Stephenson 2711
1667-Tortuguitas-Malvinas Argentinas
Pcia. de Buenos Aires, Argentina
Tel: 54 3327 44 4129
Fax: 54 3327 44 4199

Pan American Division

7400 NW 19th Street, Suite A
Miami, FL 33126 USA
Tel: 305-470-8800
Fax: 305-470-8808



Parker Hannifin Corporation
Electronic Controls Division

1651 N. Main Street
Morton, IL 61550 USA
phone 309 263 7788
fax 309 266 6674
www.parker.com/ecd